

2025 LED STRIP LIGHT CATALOGUE

Shenzhen Bylen Tech Co.,LTD

Tel: 0086 0755 23000864
Fax:0086 0755 23000864
Web:www.bylentech.com
Email:info@bylentech.com

Office Address:
5F, Block 16, Zhongpenchen Indusrrial Park,Zhenxin Road,Matian Street,Guangming
District,Shenzhen,China,518106

Factory Address:
3F, Block 3B, NO13 Tianxin Road, XinTian Villiage,Huangjiang Street,Dongguan, Guangdong.

Since 2010
InBylen[®]
Making your bright Future

Over 13 year experience in LED lighting

Company Profile




Bylen Tech is professional LED lighting company that engaging in research, production and sales in LED linear lighting industry. Our products range includes LED strip light, Neon flex, Linear lighting while offer the full solution for led lighting projects. Now we have export to more than 50 countries, like Europe, America, Russia and East and south Asia.

We have two factories in Shenzhen and Dongguan with more than 100 people. Our Engineer and sales have more than ten year experiences in LED lighting. In our factory, we have 4 pcs SMT Machine, COB Production lines and all testing equipment. We will offer high quality products and fast delivery.


We have CE, RoHs Certificates and support OEM and ODM service!




Certificates

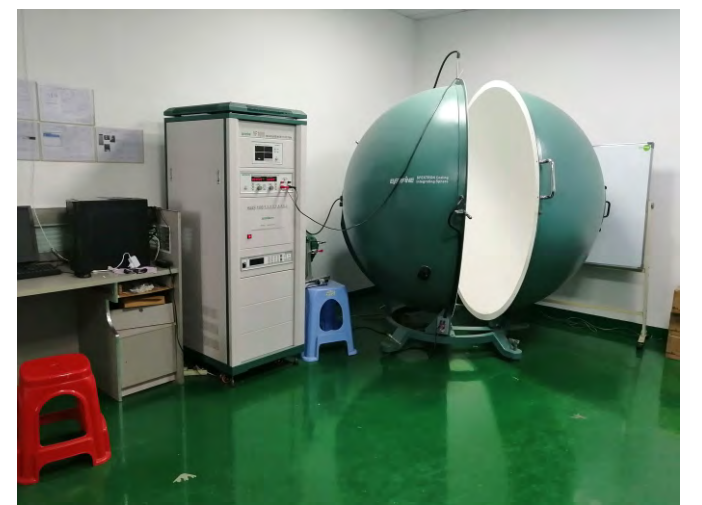


LED Strip Light

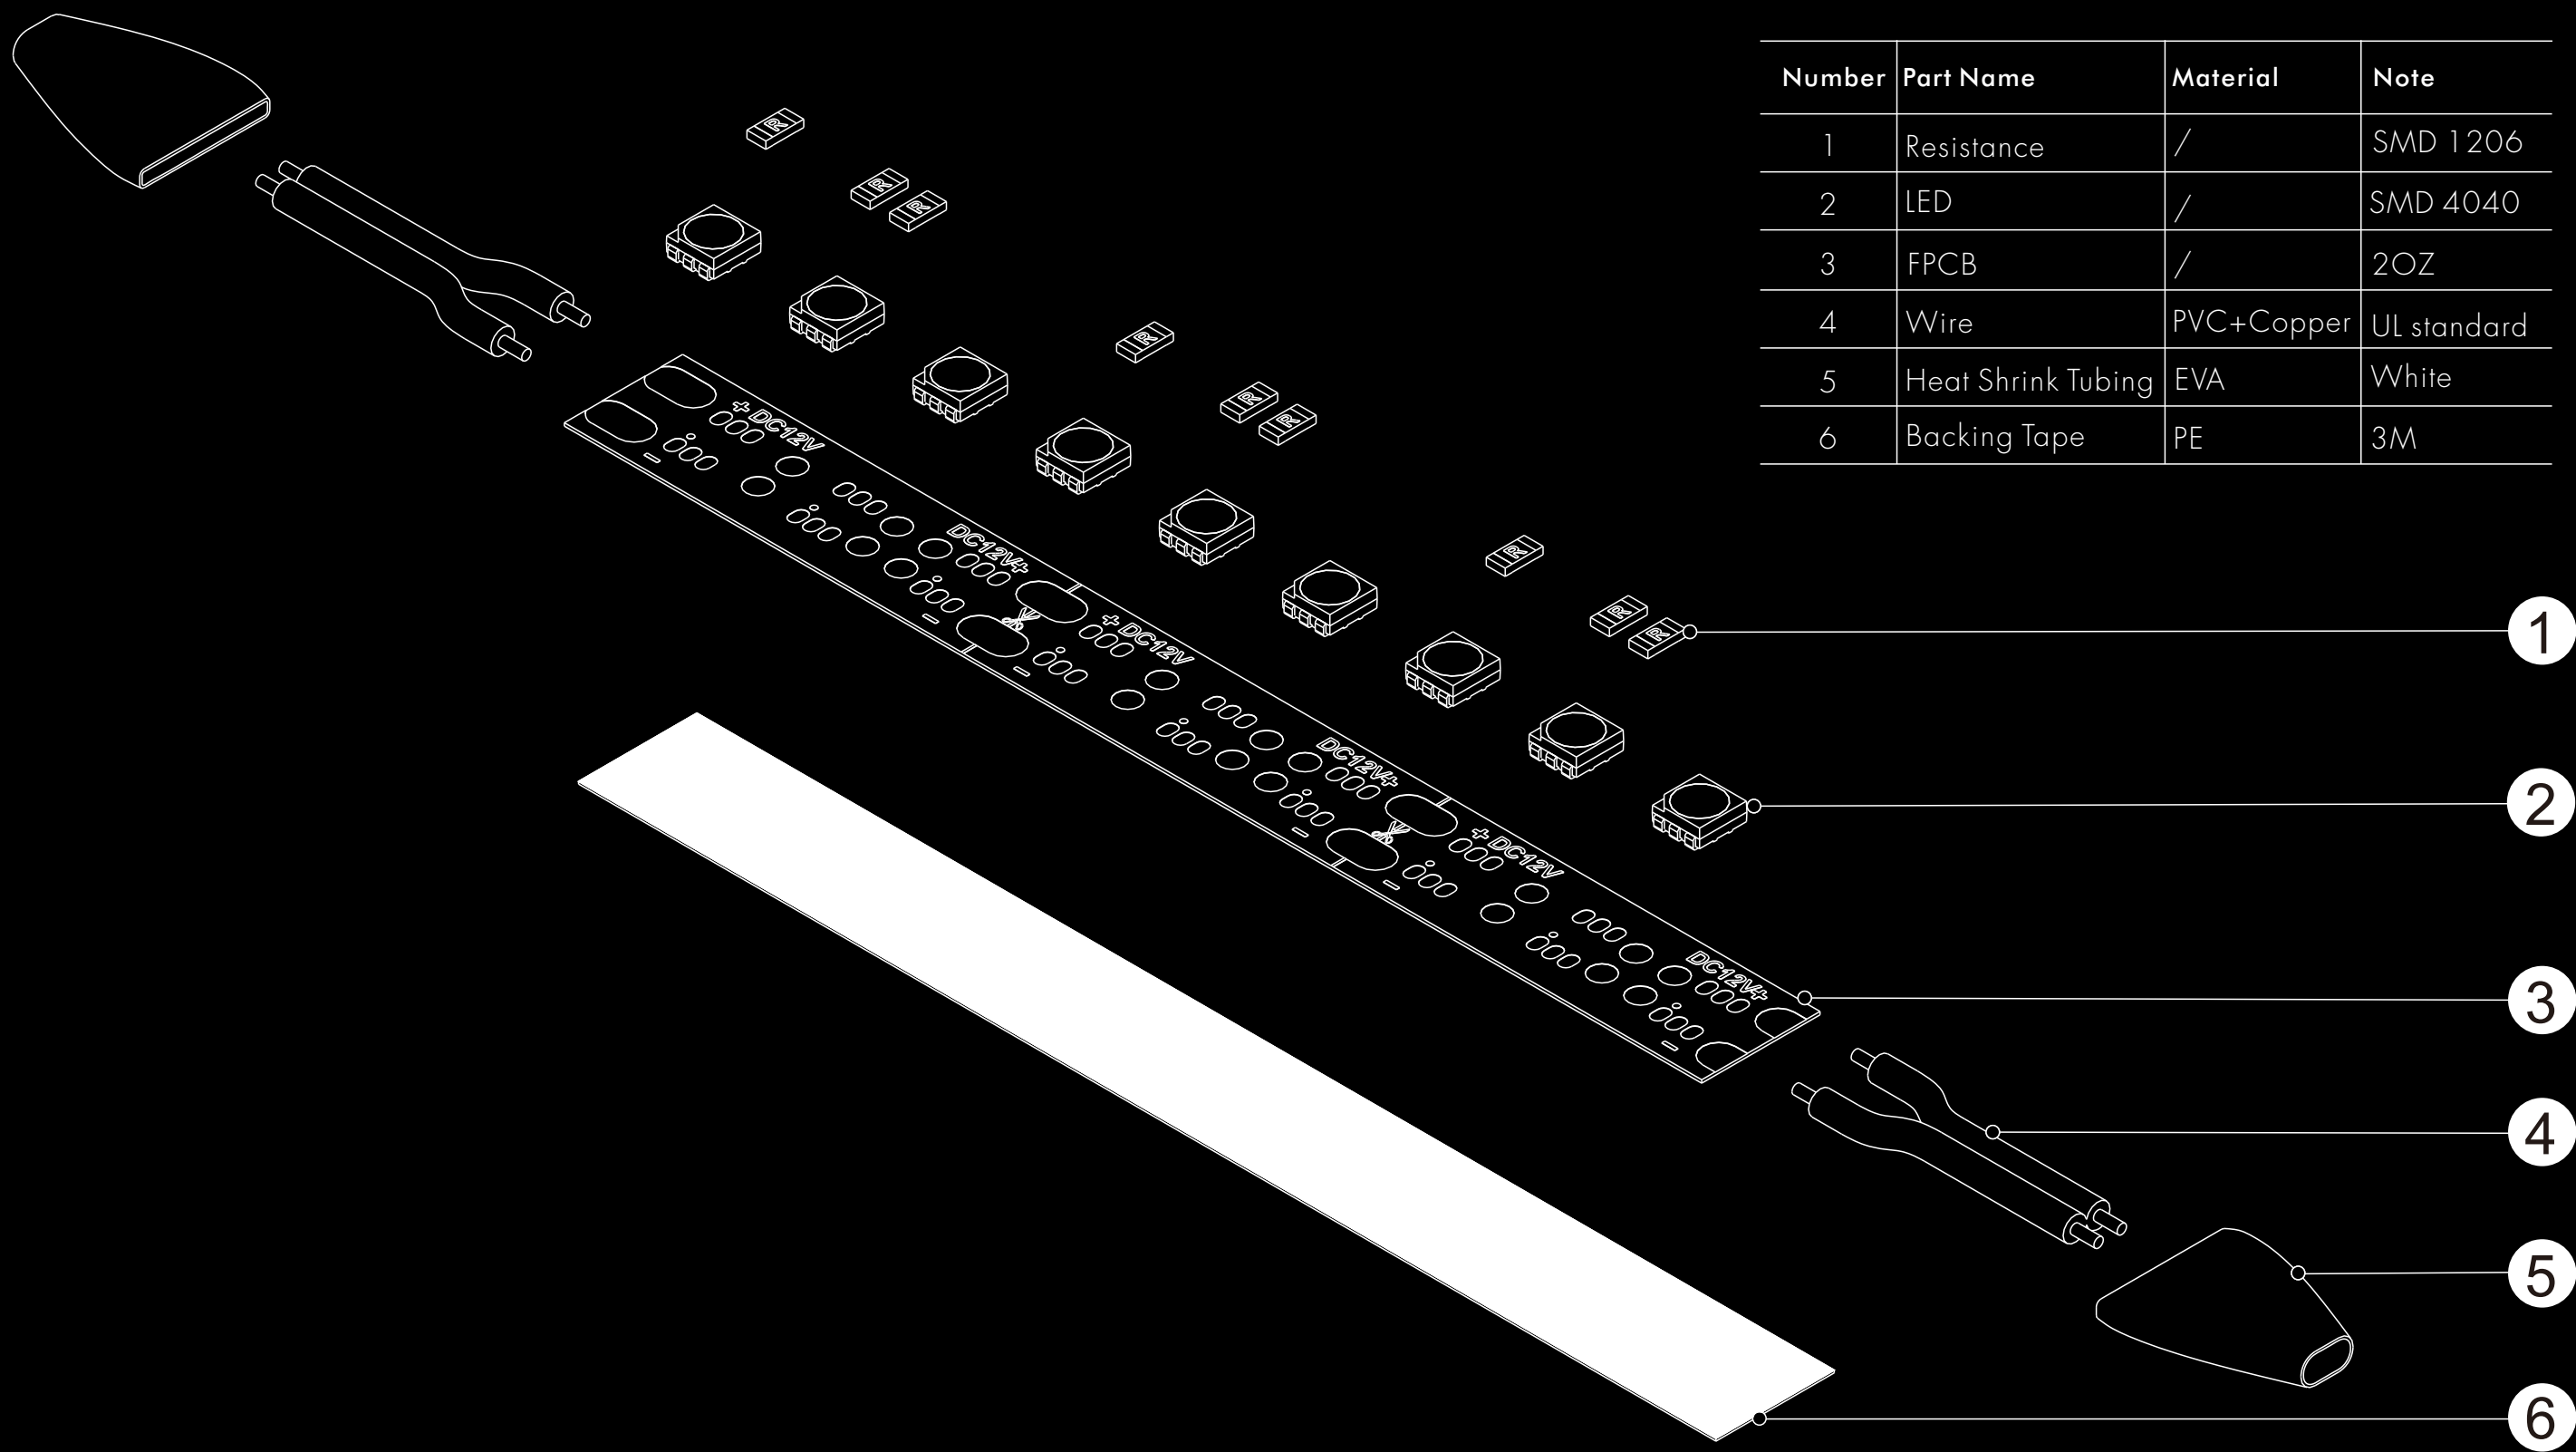

Macadam 3 Step Flexiable strip light

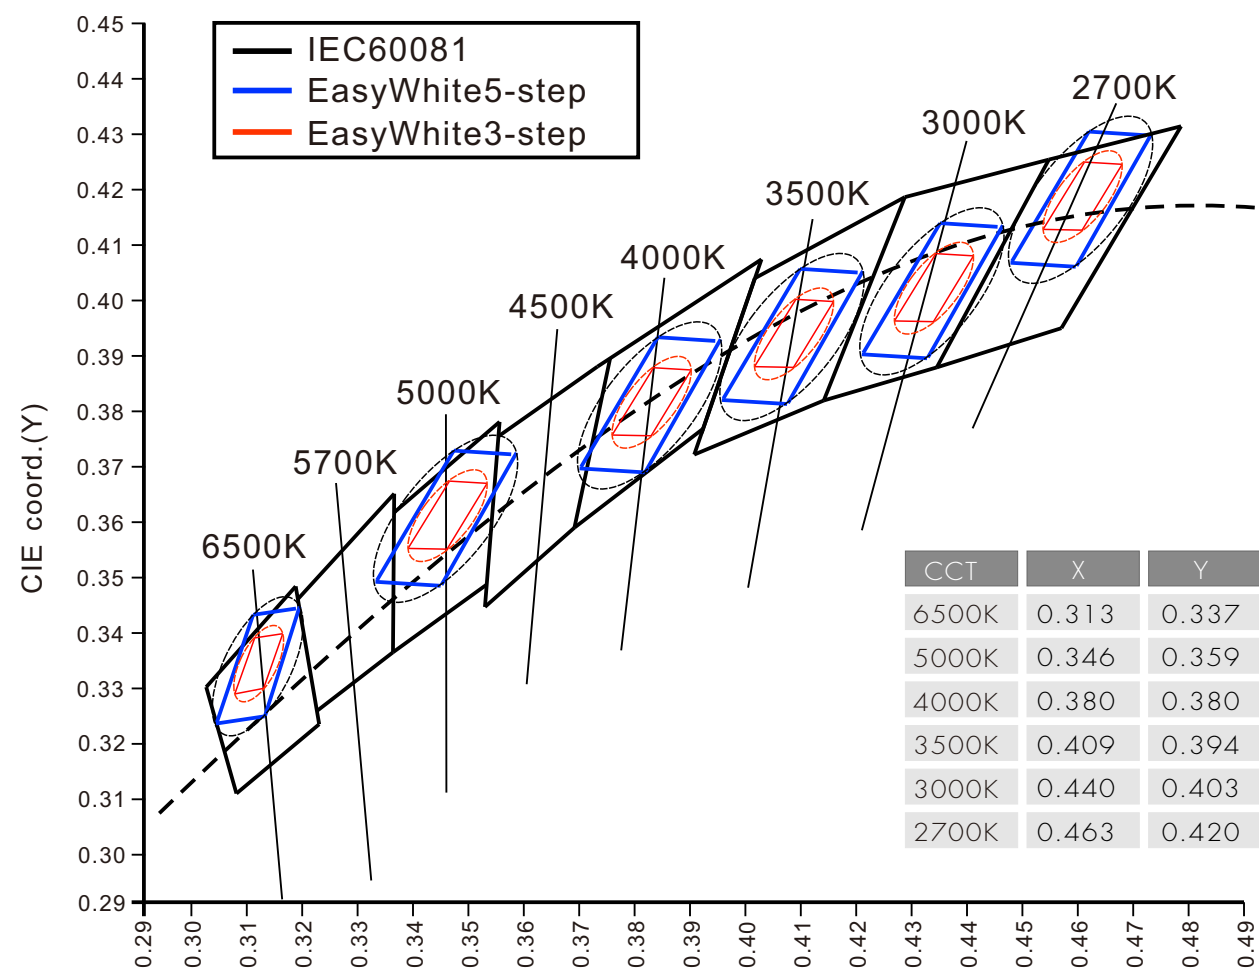

DUV

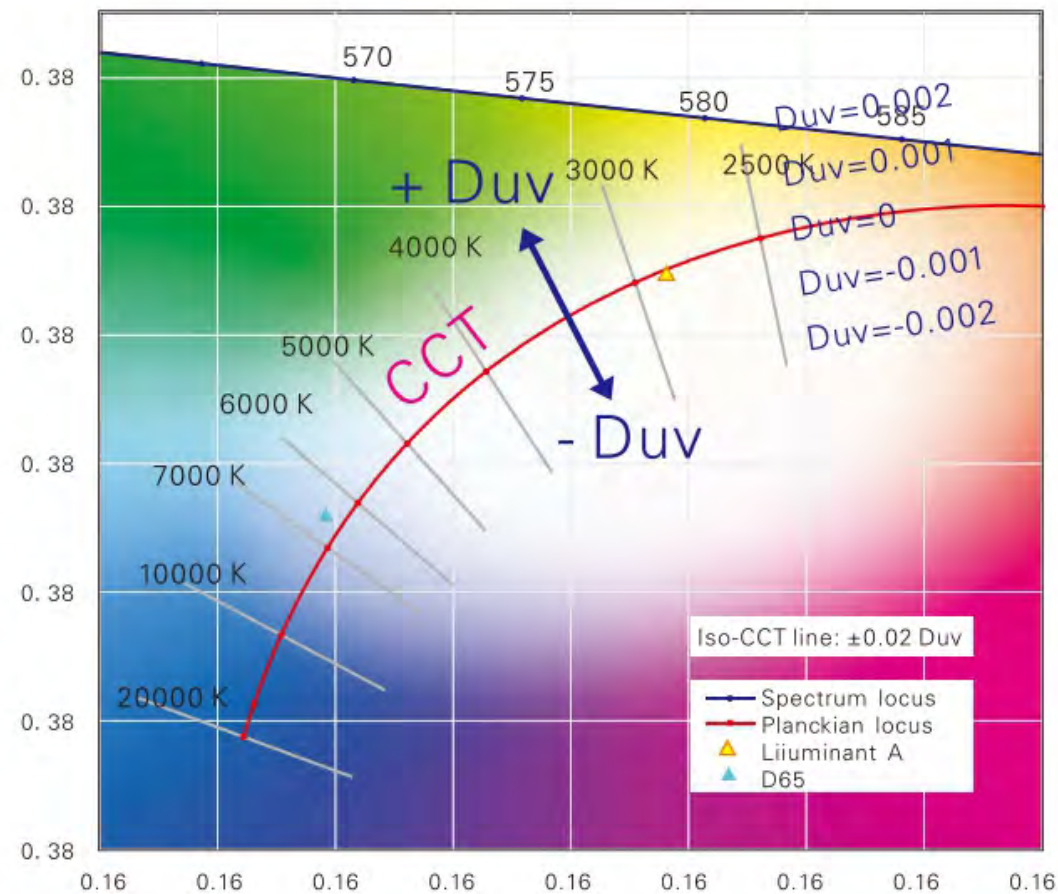

We understand it as judging color differences^uby specific number.
The DUV number more close to zero means idea color reality.

Customer-specific 9in management
Always the same Bin for different batches
One Bin,SDCM $\leq$ 3Step,No visual difference forever

1
BIN
ONLY

3
Step
SDCM

VIP
Same
Forever


Color Rendering Performance

CRI is an acronym for Color Rendering Index, and is the world's most widely accepted metric to describe a light source's ability to accurately reproduce color. The general concept involves using a set of 15 predefined colors called test color samples (TCS) and determining how accurate a light source would make each of these colors appear.

Below are the 15 test color samples reproduced:



The general color rendering index (Ra) is the average value of the special color rendering index of the 8 colors in the number 1-8 of the light source (that is, the average value of R1-R8). Usually, we use this value to characterize the color rendering of the light source. The more Ra Larger, the better the color rendering of the light source

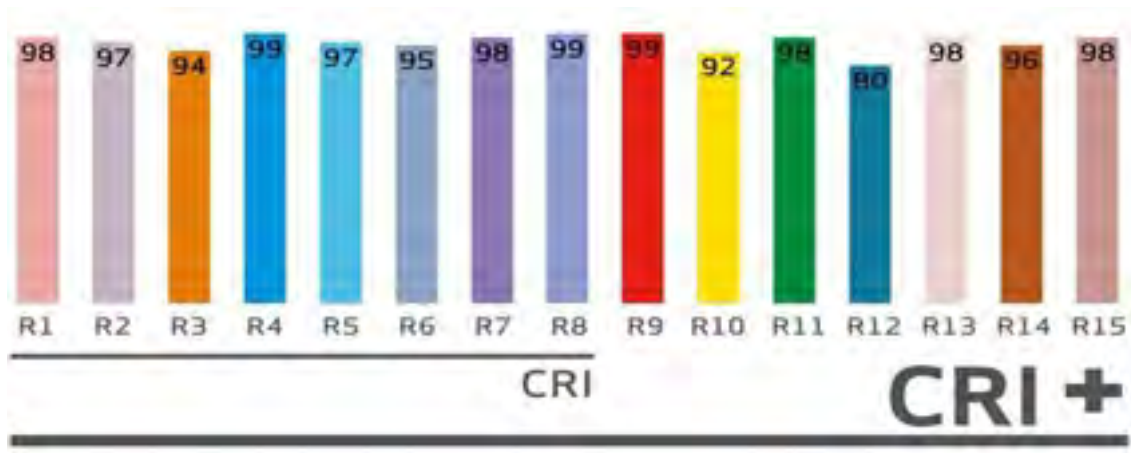

Ra70



Ra80



Ra90

The Color Temperature

The color temperature of a light source is the temperature of an ideal black-body radiator that radiates light of a color comparable to that of the light source. Color temperature is a characteristic of visible light that has important applications in lighting, photography, videography, publishing, manufacturing, astrophysics, horticulture, and other fields. In practice, color temperature is meaningful only for light sources that do in fact correspond somewhat closely to the color of some black body, i.e., light in a range going from red to orange to yellow to white to blueish white; it does not make sense to speak of the color temperature of, e.g., a green or a purple light. Color temperature is conventionally expressed in kelvins, using the symbol K, a unit of measure for absolute temperature.




2000K 2400K 2700K 2850K 3000K 3200K 3300K 3500K 3800K 4000K 4200K 4400K 5000K 6500K




Color Temperature	2700K	4000K	6000K
Light Appearance	Warm white	Natural white	Day light
Ambience	Cozy inviting	Welcoming	Crisp invigorating
Best for	Living room, Kitchens	Bathrooms outdoor	Basements
	Tabel/floor, pendants	Vanities overhead lighting	Task lihgting


Waterproof




Naked strip
Applicable to dry environment

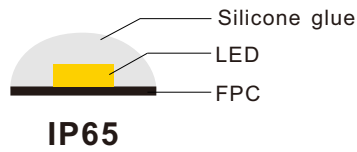

Gel coating
Applicable to damp environment

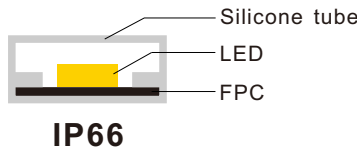

Silicone tube
Applicable to water environment

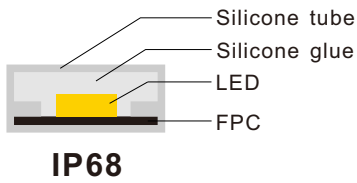

Silicone filling
Under water(with short time)

Backing Tape Selection

		Adhesive Thickness mils (mm)	Adhesion to Stainless Steel
3M 200MP		5.2mils (0.13 mm)	7.0N/CM
Normal Indoor use			
3M 300MP		4.8mils (0.12 mm)	8.6N/CM
Normal Indoor use			
3M 9080 Tape		12.8mils (0.32 mm)	7.5N/CM
Normal Indoor use			
3M 4229 Tape		30.4mils (0.76 mm)	20.0N/CM
For Waterproof Strips			
Tesa 4965		8.2mils (0.205 mm)	14.0N/CM
For Aluminum Profile			
Blue Tape		4.0mils (0.10mm)	6.0N/CM
For High Wattage Strips			



Order Information

S 05 W 20 — **3528 65** — **012 CV** — **060 S** — **M Y3**

1 2 3 4 5 6 7 8 9 10 11 12

1 PRODUCT NAME

S **STRIP LIGHT**

N **NEON FLEX**

L **LINEAR LIGHT**

2 PCB WIDTH

04 **4MM**

05 **5MM**

08 **8MM**

10 **10MM**

12 **12MM**

20 **20MM**

3 PCB COLOR

W **WHITE**

B **BLACK**

4 IP RATING

20 **NON WATERPROOF**

65 **IP65**

66 **IP66**

67 **IP67**

68 **IP68**

5 LED TYPE

2835 **2835SMD**

5050 **5050SMD**

2216 **2216SMD**

3014 **3014SMD**

3838 **3838SMD**

FCOB **FCOB TYPE**

6 COLOR TEMP

30 **3000K**

TW **CCT COLOR**

TC **RGB COLOR**

MC **RGBW COLOR**

FC **RGBCCT COLOR**

7 VOLTAGE

012 **DC12V**

024 **DC24V**

048 **DC48V**

230 **230VAC**

8 DRIVING TYPE

CV **CONSTANT VOLTAGE**

CC **CONSTANT CURRENT**

9 LED QTY

060 **60 PCS LED**

096 **96 PCS LED**

120 **120 PCS LED**

168 **168 PCS LED**

240 **240 PCS LED**

480 **480 PCS LED**

10 ROWS NUBER

S **SINGLE ROW**

D **DOUBLE ROWS**

T **TRIPLE ROWS**

11 CRI

80 **RA>80**

90 **RA>90**

95 **RA>95**

12 WARRANTY

Y3 **3 YEARS WARRANTY**

Y5 **5 YEARS WARRANTY**

Symbol Description



Input voltage DC12V



Input voltage DC24V



Input voltage DC12/24V



Input voltage DC48V



Input voltage AC230V



CE compliant



Restriction of Hazardous Substances




Dimmable



Protection grade




One BIN only



CRI Ra 80



CRI Ra 95



CRI Ra 80/90



CRI Ra 80/90/95



Beam Angle120°(Top View)



Beam Angle120°(Side View)



3 Step MacAdam allipse



LM 80 compliant



3 years warranty



5 years warranty



IP20



IP65





IP66




IP67

FLEXBLE WALL WASHER




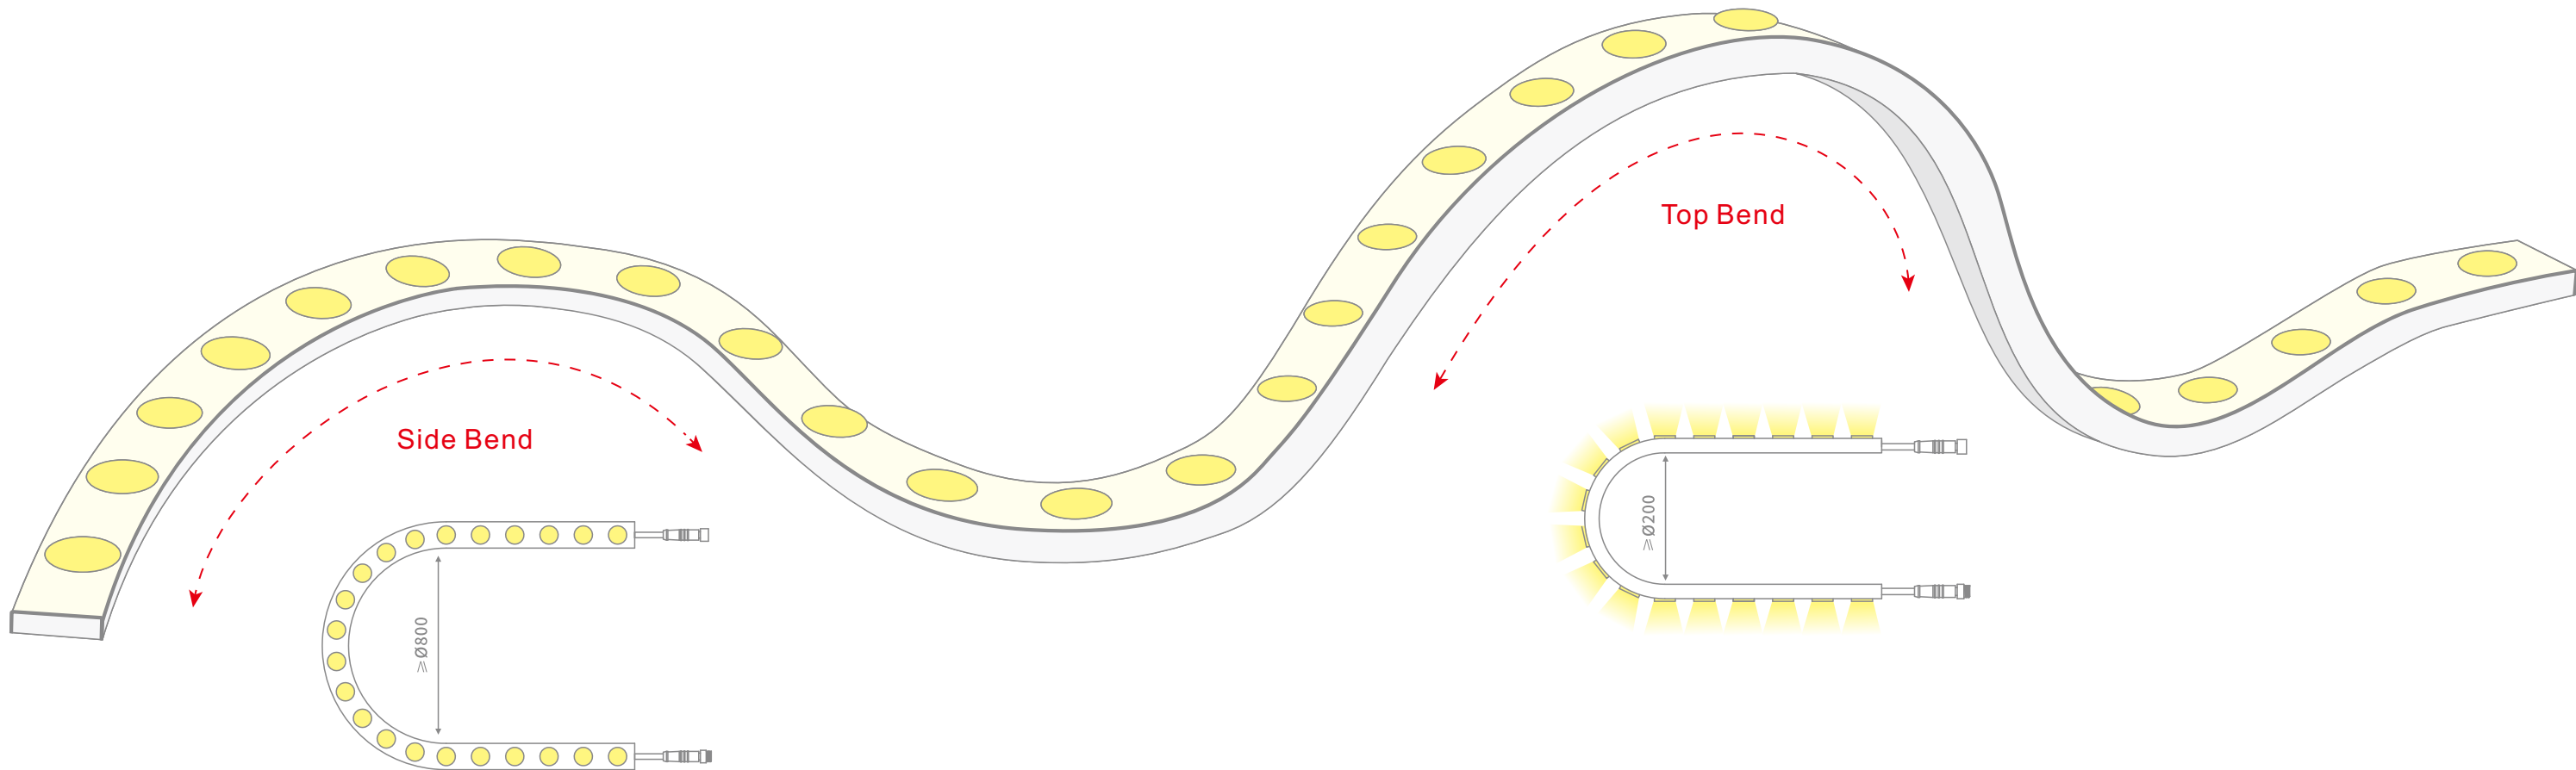


2527




2020




1616



1409T




1409P




2211


2PIN




3PIN



4PIN



5PIN





6PIN



3D BEND 2527 FLEXIBLE WALL WASHER



24V DC 2527 3D Bendable Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
W20W65-3030XX-024CV-024S-MY3-2527	24	24	24	1440	60	White	80/90	100	30° / 10°60°	
W20W65-3030TW-024CV-024S-MY3-2527	24	24	24	1500	60	CCT	80/90	100	30° / 10°60°	
W20W65-3030TC-024CV-024S-MY3-2527	24	24	24	N / A	60	RGB	80/90	100	30° / 10°60°	
W20W65-3535MC-024CV-024S-MY3-2527	24	24	24	N / A	N / A	RGBW	80/90	100	30° / 10°60°	
W20W65-3030TC-024AD-024S-MY3-2527	24	24	24	N / A	N / A	RGB SPI	80/90	100	30° / 10°60°	
W20W65-3535MC-024AD-024S-MY3-2527	24	24	24	N / A	N / A	RGBW SPI	80/90	100	30° / 10°60°	
W20W65-3030XX-024DMX-024S-MY3-2527	24	24	24	1440	60	White DMX	80/90	100	30° / 10°60°	
W20W65-3030TW-024DMX-024S-MY3-2527	24	24	24	1440	60	CCT DMX	80/90	100	30° / 10°60°	
W20W65-3030TC-024DMX-024S-MY3-2527	24	24	24	N / A	N / A	RGB DMX	80/90	100	30° / 10°60°	
W20W65-3535MC-024DMX-024S-MY3-2527	24	24	24	N / A	N / A	RGBW DMX	80/90	100	30° / 10°60°	

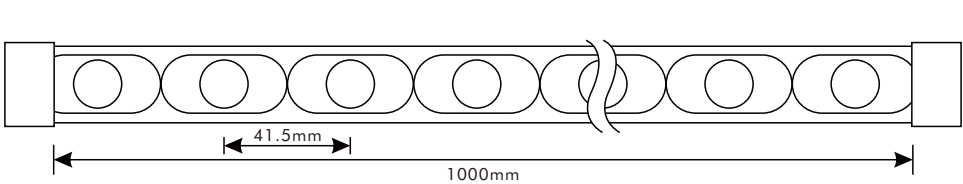

Optional Accessories

Item#		Discription
2PCN-2527-005	2PCN-2527-005A	3CP-2527-006
3CP-2527-004	Aluminum Clips for 2527 wall washer, 20mm, for straight wire out	
3CP-2527-005	Aluminum Channel for 2527 wall washer, 1000mm, for straning wire out	
3CP-2527-005A	Aluminum Channel for 2527 wall washer, 1000mm, for bottom wire out	
3CP-2527-006	Flexible channel for 2527 wall washer	
3CP-2527-008	controller for 220V strip light	




3D BEND 2020 FLEXIBLE WALL WASHER



24V DC 2020 3D Bendable Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
W12W65-3030XX-024CV-024S-MY3-2020	24	18	24	1440	60	White	80/90	100	30°	
W12W65-3030TW-024CV-024S-MY3-2020	24	18	24	1440	60	CCT	80/90	100	30°	
W12W65-3030TC-024CV-024S-MY3-2020	24	18	24	N / A	N / A	RGB	80/90	100	30°	
W12W65-3535MC-024CV-024S-MY3-2020	24	18	24	N / A	N / A	RGBW	80/90	100	30°	
W12W65-3030TC-024AD-024S-MY3-2020	24	18	24	N / A	N / A	RGB SPI	80/90	100	30°	
W12W65-3535MC-024AD-024S-MY3-2020	24	18	24	N / A	N / A	RGBW SPI	80/90	100	30°	
W12W65-3030XX-024DMX-024S-MY3-2020	24	18	24	1440	60	White DMX	80/90	100	30°	
W12W65-3030TW-024DMX-024S-MY3-2020	24	18	24	1440	60	CCT DMX	80/90	100	30°	
W12W65-3030TC-024DMX-024S-MY3-2020	24	18	24	N / A	N / A	RGB DMX	80/90	100	30°	
W12W65-3535MC-024DMX-024S-MY3-2020	24	18	24	N / A	N / A	RGBW DMX	80/90	100	30°	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under Ip20. it is different with Ip65, Ip66, Ip67, IP68

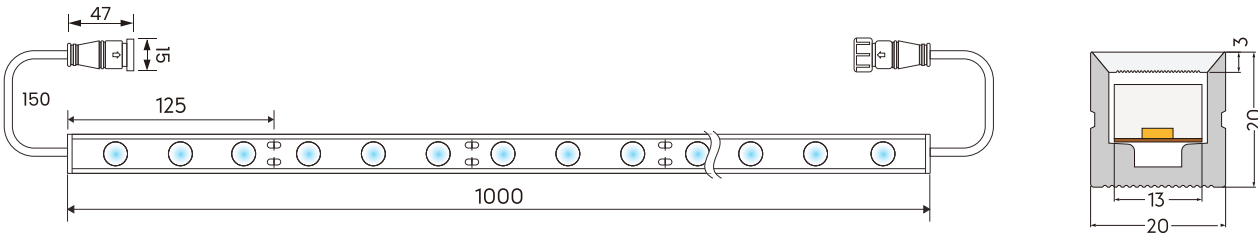

Optional Accessories



2PCN-2020-003



2PCN-2020-003



2PCN-2020-004



2PCN-2020-005



2PCN-2020-006



2PCN-2020-001

Item#	Discription
2PCN-2020-001	Silicone material, for 20*20mm end cap with hole for wire, come out in strange
2PCN-2020-002	Silicone material, for 20*20mm end cap with hole for wire, come out from side
2PCN-2020-003	Silicone material, for 20*20mm end cap without hole
2PCN-2020-004	Aluminum clips, 2mm lenght
2PCN-2020-005	Aluminum channel for 20*20mm one meter length
2PCN-2020-006	Flexible Aluminum channel for 20*20mm one meter length




3D BEND 1616 FLEXIBLE WALL WASHER



24V DC	1616 3D Bendable Flexible Wall Washer									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	W12W65-283527-024CV-048S-MY3-1616	24	16	48	1425	95	2700	80/90	100	30°/ 30°45°
	W12W65-283530-024CV-048S-MY3-1616	24	16	48	1500	100	CCT	80/90	100	30°/ 30°45°
	W12W65-283540-024CV-048S-MY3-1616	24	16	48	1575	105	RGB	80/90	100	30°/ 30°45°
	W12W65-283560-024CV-048S-MY3-1616	24	16	48	1500	100	RGBW	80/90	100	30°/ 30°45°

*The strip light will come with 5 meter /reel
*All the data above is just for reference under Ip20. it is different with Ip65, Ip66, Ip67, Ip68

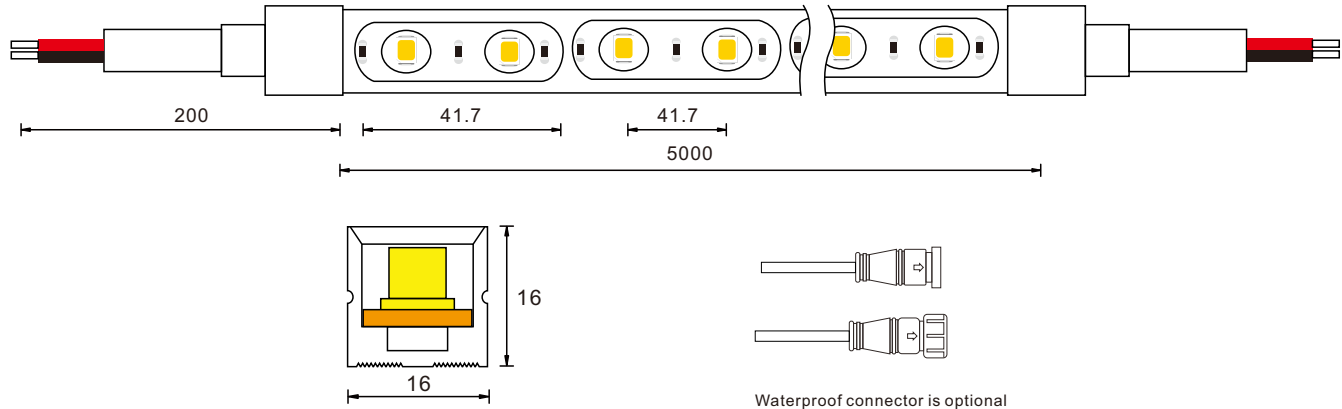

Optional Accessories



2PCN-1616-001



2PCN-1616-003



2PCN-1616-003



2PCN-1616-004



2PCN-1616-005



2PCN-1616-006

Item#	Discription
2PCN-1616-001	Silicone material, for 16*16mm end cap with hole for wire, come out in strange
2PCN-1616-002	Silicone material, for 16*16mm end cap with hole for wire, come out from side
2PCN-1616-003	Silicone material, for 16*16mm end cap without hole
2PCN-1616-004	Aluminum clips, 2mm lenght
2PCN-1616-005	Aluminum channel for 16*16mm one meter length
2PCN-1616-006	Flexible Aluminum channel for 16*16mm one meter length





30*45 DEGREE 60 LED FLEXIBLE WALL WASHER



24V DC	T1409 30*45 Degree 60LEDs Flexible Wall Washer									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	W10W67-283527-024CV-060S-MY3-T1409	24	18	60	1300	72	2700	80/90	50	30*45
	W10W67-283530-024CV-060S-MY3-T1409	24	18	60	1380	76	3000	80/90	50	30*45
	W10W67-283540-024CV-060S-MY3-T1409	24	18	60	1450	80	4000	80/90	50	30*45
	W10W67-283560-024CV-060S-MY3-T1409	24	18	60	1450	80	6000	80/90	50	30*45

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

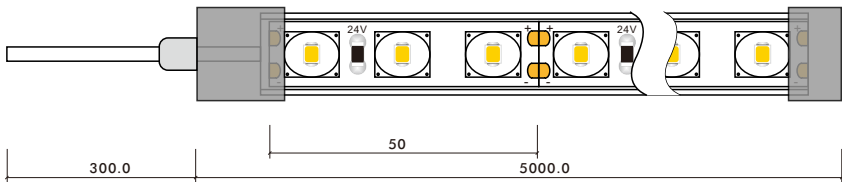

2PCN-1409-004



2PCN-1409-005



Item#	Discription
2PCN-1409-004	Aluminum cilpsfor for 1409 Wall washer 20mm
2PCN-1409-005	Aluminum channel for for 1409 Wall washer, one meter

60 DEGREE 60 LED FLEXIBLE WALL WASHER



24V DC	P1409 60 Degree 60LEDs Flexible Wall Washer									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	W10W67-283527-024CV-060S-MY3-P1409	24	18	60	1300	72	2700	80/90	50	60
	W10W67-283530-024CV-060S-MY3-P1409	24	18	60	1380	76	3000	80/90	50	60
	W10W67-283540-024CV-060S-MY3-P1409	24	18	60	1450	80	4000	80/90	50	60
	W10W67-283560-024CV-060S-MY3-P1409	24	18	60	1450	80	6000	80/90	50	60

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

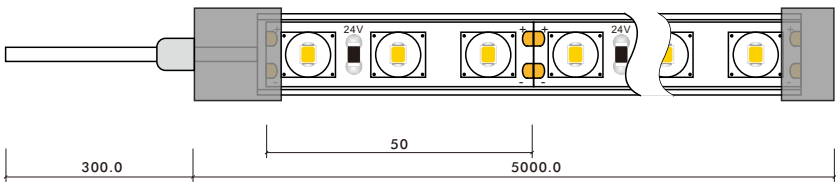

2PCN-1409-004



2PCN-1409-005


Item#	Discription
2PCN-1409-004	Aluminum cilpsfor for 1409 Wall washer 20mm
2PCN-1409-005	Aluminum channel for for 1409 Wall washer, one meter

2211 SINGLE COLOR FLEXIBLE WALL WAHSER



24V DC White Color 42LEDs Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
W18W67-2835XX-024CV-042S-MY3-2209	24	15	42	1000	100	CCT	80/90	143	60	
W18W67-2835XX-024CV-042S-MY3-2209	24	15	42	1000	100	CCT	80/90	143	60	
W18W67-2835XX-024CV-042S-MY3-2209	24	15	42	1000	100	CCT	80/90	143	60	
W18W67-2835XX-024CV-042S-MY3-2209	24	15	42	1000	100	CCT	80/90	143	60	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

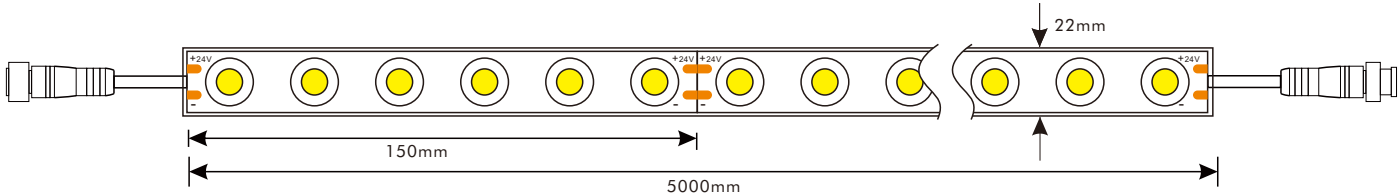

2PCN-2211-004



2PCN-2211-005


Item#	Discription
2PCN-2211-004	Aluminum cilpsfor for 2211 Wall washer 20mm
2PCN-2211-005	Aluminum channel for for 2211 Wall washer, one meter

2211 MINI CUT SINGLE COLOR FLEXIBLE WALL WAHSER



24V AC Mini Cut White Color 42LEDs Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
W18W67-2835XX-024CV-042S-MY3-2211MC	24	15	42	N/A	N/A	RGB	80/90	24	60	
W18W67-2835XX-024CV-042S-MY3-2211MC	24	15	42	N/A	N/A	RGB	80/90	24	60	
W18W67-2835XX-024CV-042S-MY3-2211MC	24	15	42	N/A	N/A	RGB	80/90	24	60	
W18W67-2835XX-024CV-042S-MY3-2211MC	24	15	42	N/A	N/A	RGB	80/90	24	60	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

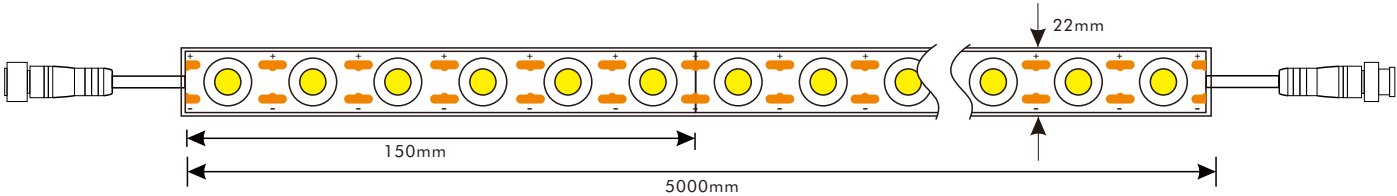

2PCN-2211-004



2PCN-2211-005


Item#	Discription
2PCN-2211-004	Aluminum cilpsfor for 2211 Wall washer 20mm
2PCN-2211-005	Aluminum channel for for 2211 Wall washer, one meter

2211 CCT COLOR FLEXIBLE WALL WAHSER



24V DC CCT Color 42LED Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
W18W67-5050TW-024CV-042S-MY3-2211	24	15	42	1050	70	CCT	80/90	48	60	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

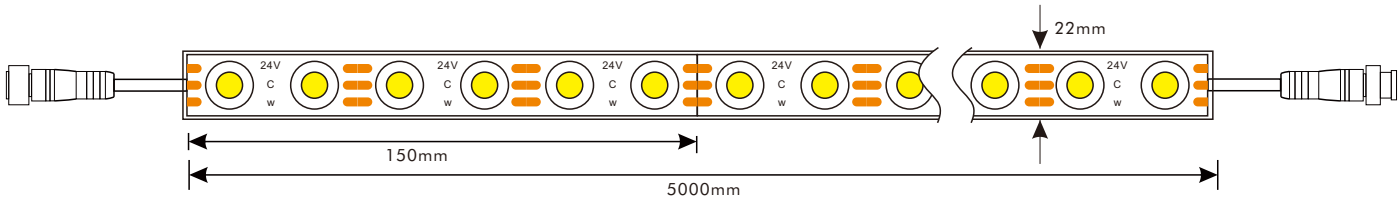

2PCN-2211-004



2PCN-2211-005


Item#	Discription
2PCN-2211-004	Aluminum cilpsfor for 2211 Wall washer 20mm
2PCN-2211-005	Aluminum channel for for 2211 Wall washer, one meter

2211 RGB COLOR FLEXIBLE WALL WASHER



24V AC RGB Color 42LEDs Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
W18W67-5050TC-024CV-042S-MY3-2211	24	15	42	N/A	N/A	RGB	80/90	143	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

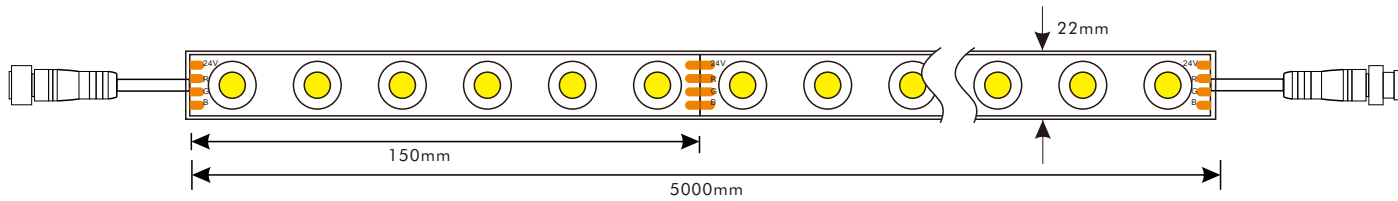

2PCN-2211-004



2PCN-2211-005


Item#	Discription
2PCN-2211-004	Aluminum cilpsfor for 2211 Wall washer 20mm
2PCN-2211-005	Aluminum channel for for 2211 Wall washer, one meter

2211 RGBW COLOR FLEXIBLE WALL WASHER



24V DC RGBW Color 42LEDs Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
W18W67-5050MC-024CV-042S-MY3-2211	24	15	42	N/A	N/A	RGBW	80/90	150	60	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

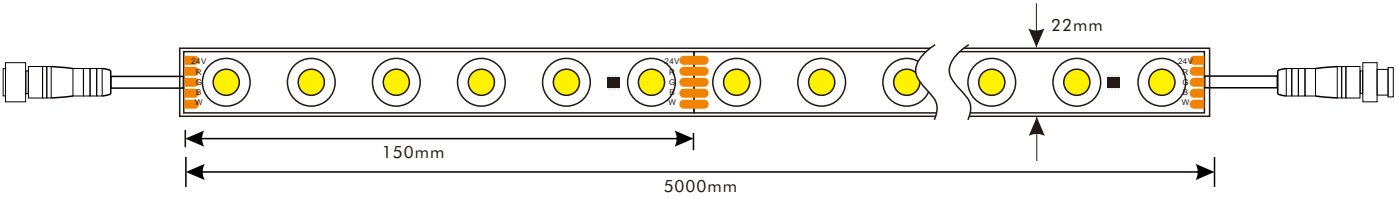

2PCN-2211-004



2PCN-2211-005


Item#	Discription
2PCN-2211-004	Aluminum cilpsfor for 2211 Wall washer 20mm
2PCN-2211-005	Aluminum channel for for 2211 Wall washer, one meter

42LEDs RGB DMX 512 FLEXIBLE WALL WASHER



24V AC RGB Color DMX 512 Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
W18W67-5050TC-024DMX-042S-MY3-2209	24	15	42	N/A	N/A	RGB	80/90	150	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

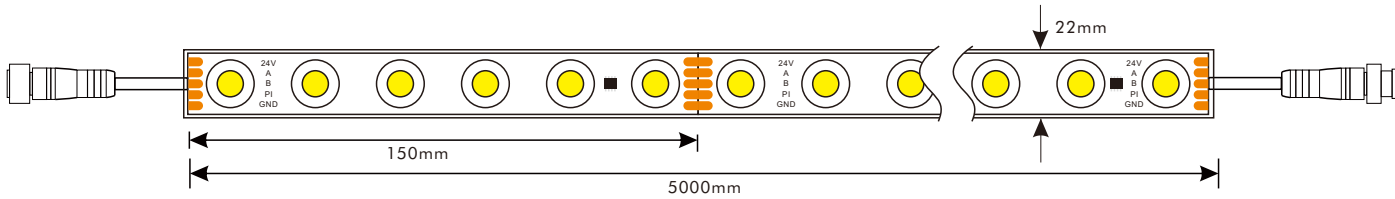

2PCN-2211-004



2PCN-2211-005


Item#	Discription
2PCN-2211-004	Aluminum cilpsfor for 2211 Wall washer 20mm
2PCN-2211-005	Aluminum channel for for 2211 Wall washer, one meter

2211 RGBW DMX512 FLEXIBLE WALL WASHER



24V DC RGBW Color DMX 512 Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
W18W67-5050MC-024DMX-042S-MY3-2211	24	15	42	N/A	N/A	RGBW DMX	80/90	150	60	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

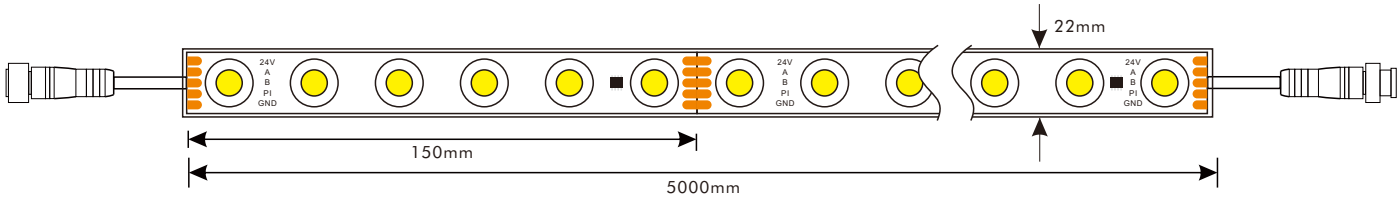

2PCN-2211-004



2PCN-2211-005

Item#	Discription
2PCN-2211-004	Aluminum cilpsfor for 2211 Wall washer 20mm
2PCN-2211-005	Aluminum channel for for 2211 Wall washer, one meter



FLEX PANEL SHEET

FLEX PANEL SHEET-WHITE COLOR **NEW**



24V DC	490*245MM Color Flex Panle Sheet									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	SPSW20-283527-024CV-242M-MY3-490245	24	28	242	2520	90	2700	80/90	22.3*22.3	120
	SPSW20-283530-024CV-242M-MY3-490245	24	28	242	2660	95	3000	80/90	22.3*22.3	120
	SPSW20-283540-024CV-242M-MY3-490245	24	28	242	2800	100	4000	80/90	22.3*22.3	120
	SPSW20-283560-024CV-242M-MY3-490245	24	28	242	2660	95	6000	80/90	22.3*22.3	120



FLEX PANEL SHEET-CCT


NEW



24V DC	490*245MM CCT Color Flex Panel Sheet									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
	SPSW20-5050TW-024CV-484M-MY3-490245	24	40	288	3800	90	CCT	80/90	22.3*22.3	120

FLEX PANEL SHEET-RGB

NEW

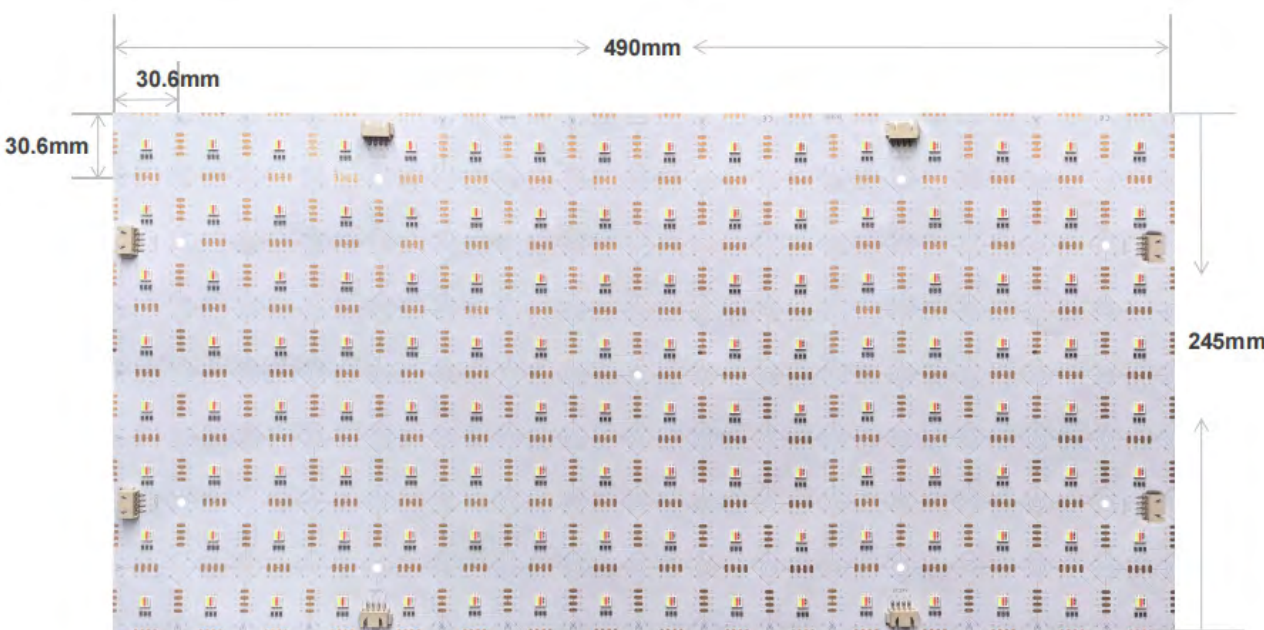

24V DC	490*245MM RGB Color Flex Panel Sheet									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
	SPSW20-5050TC-024CV-128M-MY3-490245	24	45	128	N/A	N/A	RGB	N/A	30.6*30.6	120



FLEX PANEL SHEET-RGBW

NEW



24V DC 490*245MM RGBW Color Flex Panel Sheet									
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
SPSW20-5050MC-024CV-288M-MY3-490245	24	48	288	N/A	N/A	RGBW	80/90	125*27.2	120



FLEX PANEL SHEET-RGBW


NEW



24V DC 490*245MM RGBW Color Flex Panel Sheet									
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
SPSW20-2835MC-024CV-512M-MY3-490245	24	45	512	N/A	N/A	RGBW	80/90	30.6*30.6	120

FLEX PANEL SHEET-RGBCCT

NEW

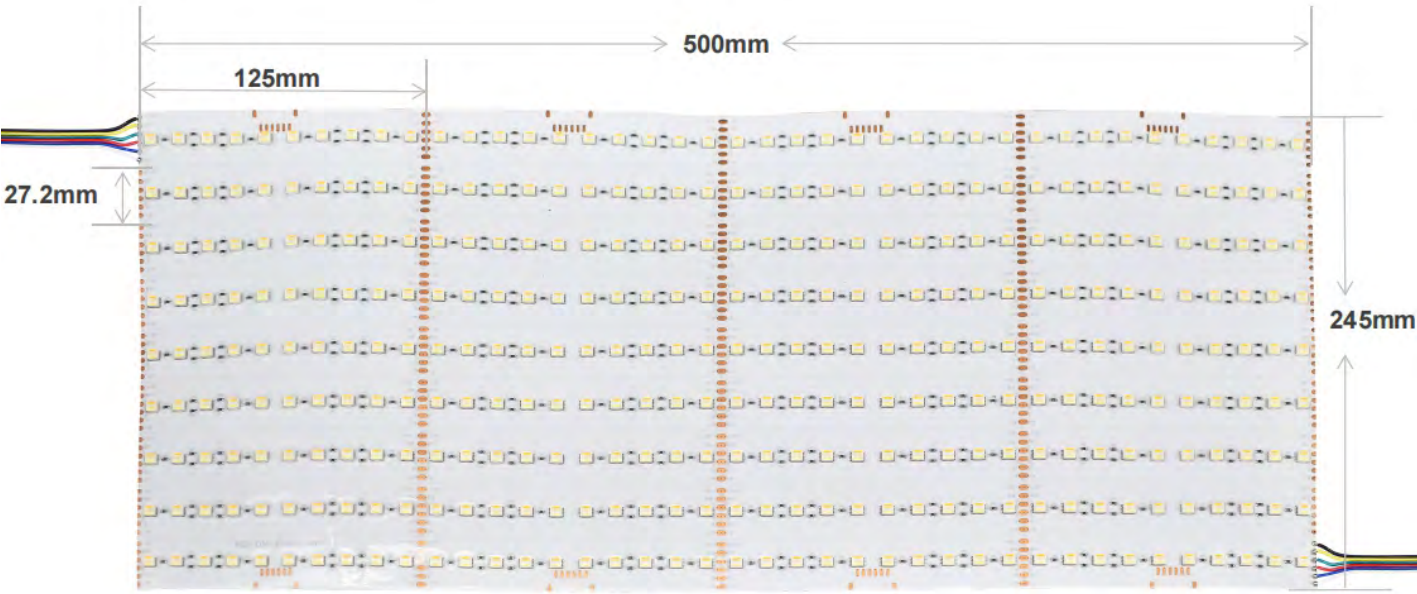


24V DC	490*245MM RGBCCT Color Flex Panel Sheet									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
	SPSW20-5050FC-024CV-360M-MY3-490245	24	60	360	N/A	N/A	RGBWW	80/90	125*27.2	120



FLEX PANEL SHEET-WHITE WITH LENS

NEW

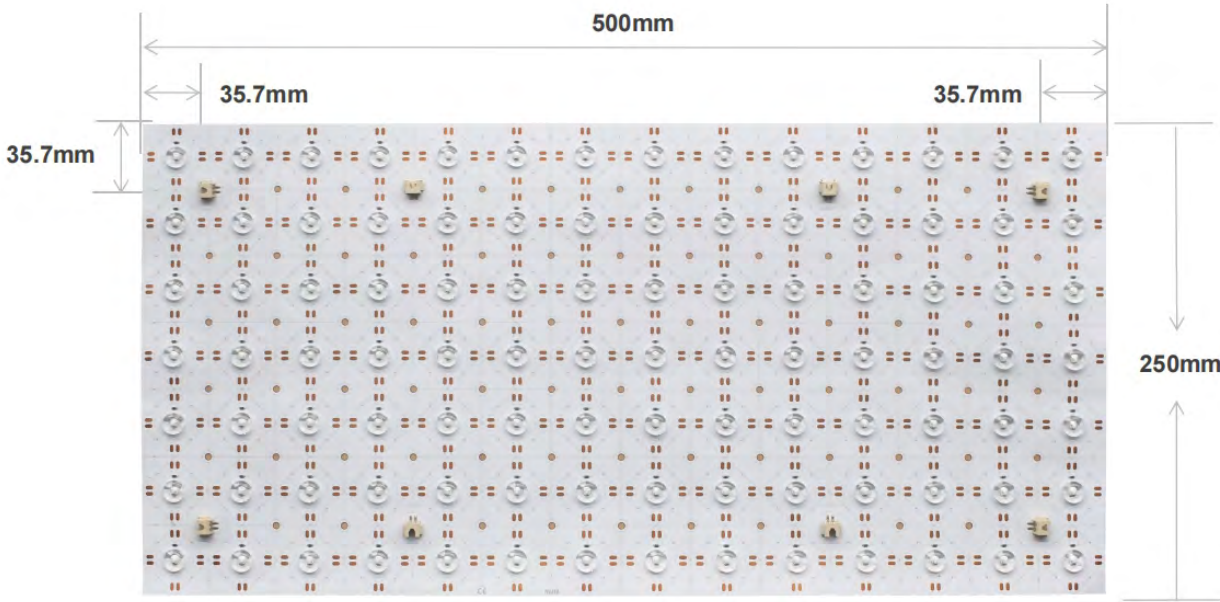


24V DC	490*245MM WHITE Color Flex Panel Sheet With Lens									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
	SPSW20-283527-024CV-098M-MY3-490250	24	20	242	1800	90	2700	80/90	35.7*35.7	160
	SPSW20-283530-024CV-098M-MY3-490250	24	20	242	1900	95	3000	80/90	35.7*35.7	160
	SPSW20-283540-024CV-098M-MY3-490250	24	20	242	2000	100	4000	80/90	35.7*35.7	160
	SPSW20-283560-024CV-098M-MY3-490250	24	20	242	1900	95	6000	80/90	35.7*35.7	160



FLEX PANEL SHEET-DIGITAL RGB

NEW

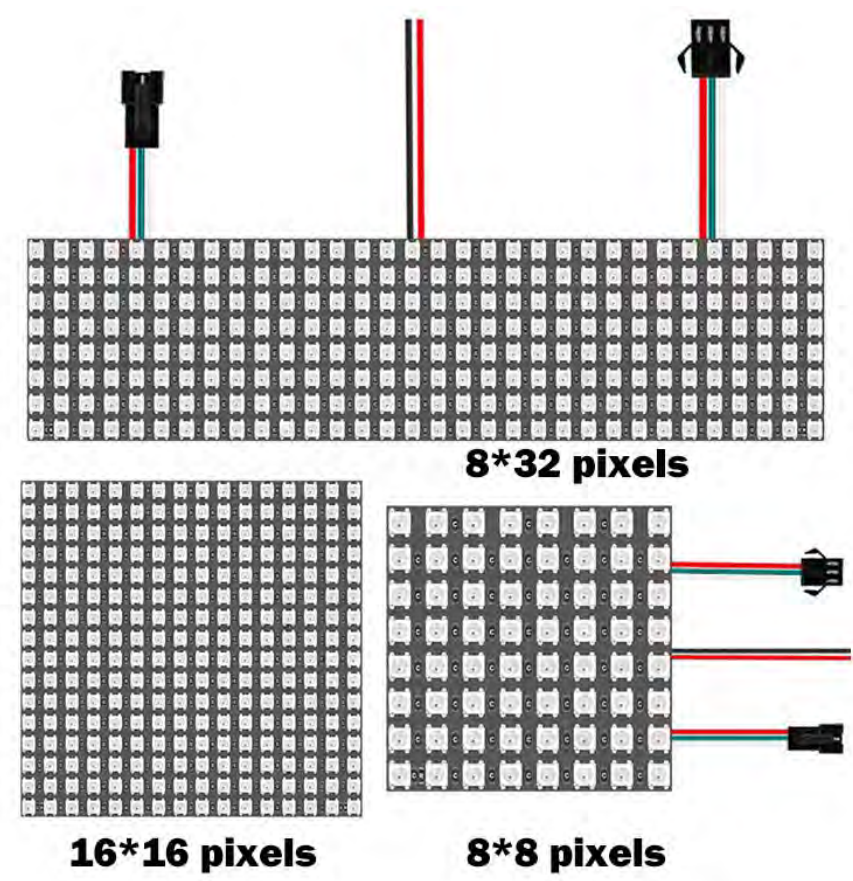

5V DC	Digital RGB Color Flex Panel Sheet									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	SPSW20-5050TC-005AD-064M-MY3-8080	5	15	64	N/A	N/A	RGBIC(SK6812)	80/90	10*10	120
	SPSW20-5050TC-005AD-256M-MY3-160160	5	35	256	N/A	N/A	RGBIC(SK6812)	80/90	10*10	120
	SPSW20-5050TC-005AD-256M-MY3-80320	5	35	256	N/A	N/A	RGBIC(SK6812)	80/90	10*10	120



12V DC	Digital RGB Color Flex Panel Sheet									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	SPSW20-5050TC-012AD-064M-MY3-8080	12	15	64	N/A	N/A	RGBIC(SK6813)	80/90	10*10	120
	SPSW20-5050TC-012AD-256M-MY3-160160	12	35	256	N/A	N/A	RGBIC(SK6813)	80/90	10*10	120
	SPSW20-5050TC-012AD-256M-MY3-80320	12	35	256	N/A	N/A	RGBIC(SK6813)	80/90	10*10	120



AC LED STRIP LIGHT





GUIDE LINE FOR AC LED STRIP LIGHT

SERIES	ITEM NUMBER	VOLTAGE	POWER	LED QTY	LED TYPE	CUT UNIT	WIDTH
Single Color	S10WXX-283527-230CC-120S-MY3	230V	15	120	2835	100	12
	S10WXX-2835XX-230CC-120S-MY3-PRO	230V	15	120	2835	50	12
	S08WXX-2835XX-230CV-120S-MY3-ECO	230V	8	120	2835	100	10
	S15WXX-2835XX-230CC-240S-MY3	230V	20	240	2835	50	15
CCT	S10WXX-2835TW-230CC-096S-MY3	230V	10	96	2835	50	15
RGB	S12WXX-5050TC-230CV-072S-MY3	230V	15	72	5050	500	14
RGBW	S12WXX-5050MC-230CV-072S-MY3	230V	15	72	5050	500	14
COB	S10WXX-FCOB27-230CV-432S-MY3	230V	12	432	COB	16.7	12



2835 120LED 230V SINGLE COLOR STRIP LIGHT

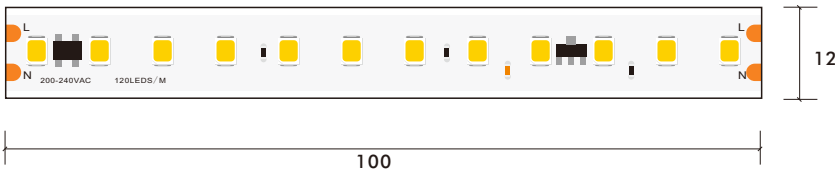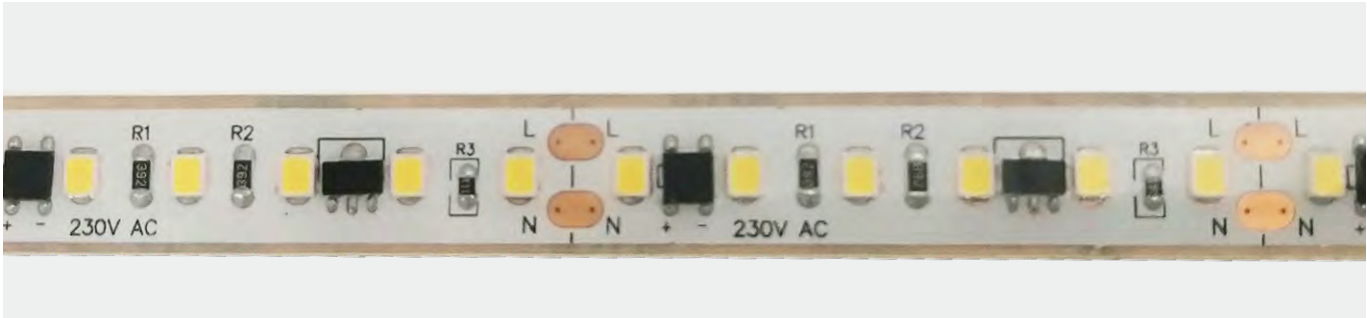

230V AC	12mm 2835 120LED 100mm Cutting Single Color LED Strip									
	Model Number	Voltage (ac v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10WXX-283527-230CC-120S-MY3	230	15	120	1425	95	2700	80/90	100	120
	S10WXX-283530-230CC-120S-MY3	230	15	120	1500	100	3000	80/90	100	120
	S10WXX-283540-230CC-120S-MY3	230	15	120	1575	105	4000	80/90	100	120
	S10WXX-283560-230CC-120S-MY3	230	15	120	1500	100	6000	80/90	100	120

*The strip light will come with 5 meters /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



2PCN-BTB-004



2PCN-BCB-004



2PCN-CTB-004





BY-RT1



BY-S3

Item#	Discription
2PCN-BTB-004	2pin Waterproof connector for strip and strip light , for 12mm width 230V LED strip light with 10mm PCB
2PCN-BCB-004	2pin Waterproof connector with 200mm wire for strip and strip light , for 12mm width 230V LED strip light with 10mm PCB
2PCN-CTB-004	2pin Waterproof connector for power and strip light , for 12mm width 230V LED strip light with 10mm PCB
BY-RT1	Remote for 230V led strip light
BY-S3	Controller for 230V led strip light

2835 120LED 230V 50MM CUT SINGLE COLOR STRIP LIGHT

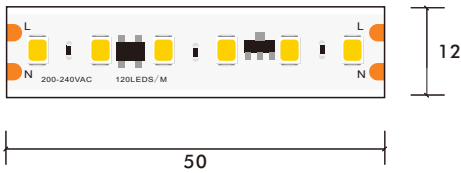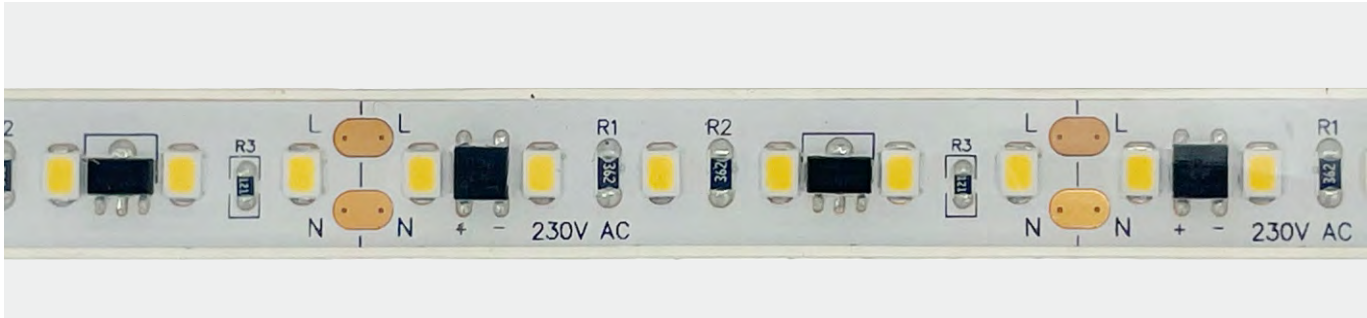

	12mm 2835 120LED 50mm Cutting Single Color LED Strip									
	Model Number	Voltage (ac v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10WXX-283527-230CC-120S-MY3-PRO	230	15	120	1425	95	2700	80/90	50	120
	S10WXX-283530-230CC-120S-MY3-PRO	230	15	120	1500	100	3000	80/90	50	120
	S10WXX-283540-230CC-120S-MY3-PRO	230	15	120	1575	105	4000	80/90	50	120
	S10WXX-283560-230CC-120S-MY3-PRO	230	15	120	1500	100	6000	80/90	50	120

*The strip light will come with 5 meters /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



2PCN-BTB-004



2PCN-BCB-004



2PCN-CTB-004




BY-RT1



BY-S3

Item#	Discription
2PCN-BTB-004	2pin Waterproof connector for strip and strip light , for 12mm width 230V LED strip light with 10mm PCB
2PCN-BCB-004	2pin Waterproof connector with 200mm wire for strip and strip light , for 12mm width 230V LED strip light with 10mm PCB
2PCN-CTB-004	2pin Waterproof connector for power and strip light , for 12mm width 230V LED strip light with 10mm PCB
BY-RT1	Remote for 230V led strip light
BY-S3	Controller for 230V led strip light

2835 120LED 230V SINGLE COLOR STRIP LIGHT

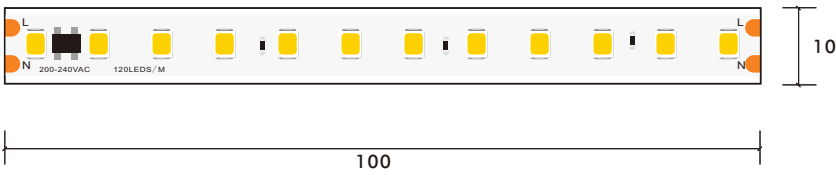

230V AC	10mm 2835 120LED 100mm Cutting Single Color LED Strip									
	Model Number	Voltage (ac v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S08WXX-283527-230CV-120S-MY3-ECO	230	8	120	640	80	2700	80/90	100	120
	S08WXX-283530-230CV-120S-MY3-ECO	230	8	120	765	85	3000	80/90	100	120
	S08WXX-283540-230CV-120S-MY3-ECO	230	8	120	720	90	4000	80/90	100	120
	S08WXX-283560-230CV-120S-MY3-ECO	230	8	120	765	85	6000	80/90	100	120

*The strip light will come with 5 meters /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



2PCN-BTB-003



2PCN-BCB-003



2PCN-CTB-003




BY-RT1



BY-S3

Item#	Discription
2PCN-BTB-003	2pin Waterproof connector for strip and strip light , for 10mm width 230V LED strip light with 8mm PCB
2PCN-BCB-003	2pin Waterproof connector with 200mm wire for strip and strip light , for 10mm width 230V LED strip light with 8mm PCB
2PCN-CTB-003	2pin Waterproof connector for power and strip light , for 10mm width 230V LED strip light with 8mm PCB
BY-RT1	Remote for 230V led strip light
BY-S3	Controller for 230V led strip light

2835 240LED DOUBLE ROW 230V SINGLE COLOR STRIP LIGHT

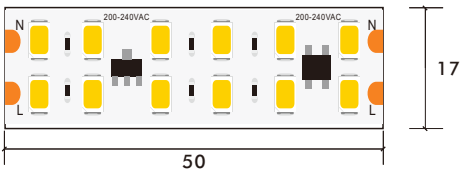

230V AC	15mm 2835 240LED 50mm cutting Single Color LED Strip									
	Model Number	Voltage (ac v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S15WXX-283527-230CC-120S-MY3-PRO	230	20	240	1600	80	2700	80/90	50	120
	S15WXX-283530-230CC-120S-MY3-PRO	230	20	240	1700	85	3000	80/90	50	120
	S15WXX-283540-230CC-120S-MY3-PRO	230	20	240	1800	90	4000	80/90	50	120
	S10WXX-283560-230CC-120S-MY3-PRO	230	20	240	1875	95	6000	80/90	50	120

*The strip light will come with 5 meters /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




BY-RT1



BY-S3

Item#	Discription
BY-RT1	Remote for 230V led strip light
BY-S3	Controller for 230V led strip light

2835 96LED 230V CCT DUAL COLOR STRIP LIGHT

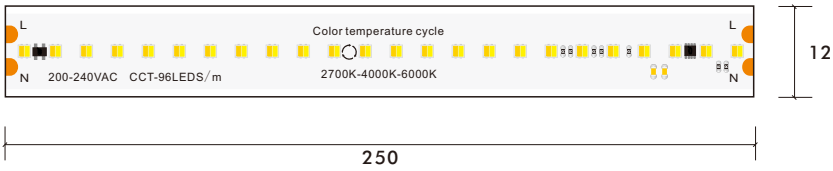


230V AC	12mm 2835 96LED CCT Dual Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10WXX-2835TW-230CC-096S-MY3	230	10	96	1000	100	CCT	80/90	250	120

*The strip light will come with 5 meters /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2PCN-BTB-004	2PCN-BCB-004	2PCN-CTB-004
Item#	Discription	
2PCN-BTB-004	2pin Waterproof connector for strip and strip light , for 12mm width 230V LED strip light with 10mm PCB	
2PCN-BCB-004	2pin Waterproof connector with 200mm wire for strip and strip light , for 12mm width 230V LED strip light with 10mm PCB	
2PCN-CTB-004	2pin Waterproof connector for power and strip light , for 12mm width 230V LED strip light with 10mm PCB	

5050 72LED 230V RGB COLOR STRIP LIGHT


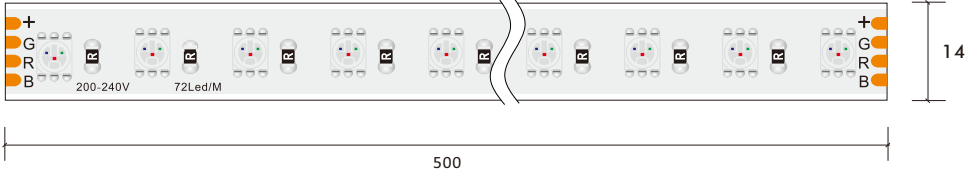


230V AC	14mm 5050 72LED RGB Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S12WXX-5050TC-230CV-072S-MY3	230	15	72	N/A	N/A	RGB	80/90	500	120

*The strip light will come with 5 meters /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

BY-S3	BY-RT4	BY-S4	BY-RS1
Item#	Discription		
BY-S3	230V RGB led controller, support 50meter RGB strip light		
BY-RT4	230V remote board, Work with BY-S3		
BY-S4	230V RGB/RGBW LED controller, support 50 meter RGB/RGBW strip light		
BY-RS1	230V remote board work with BY-S4		

5050 72LED 230V RGBW COLOR STRIP LIGHT

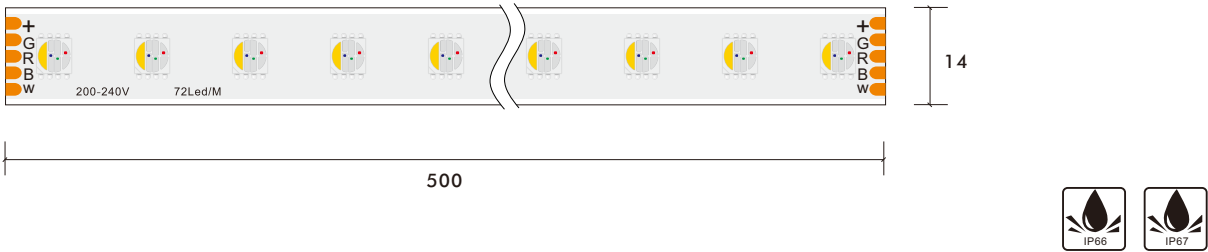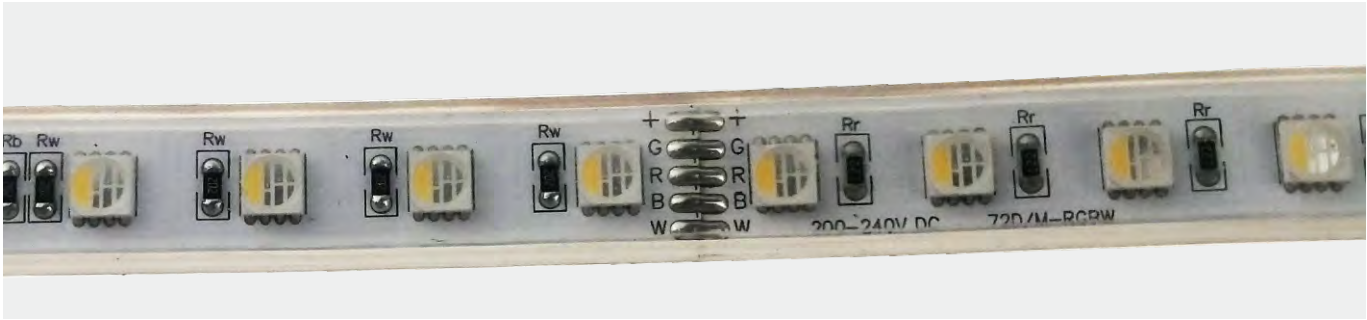

220V AC 14cm 230V 5050 RGBW Color LED Strip										
Model Number	Voltage (ac v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S12WXX-5050MC-230CV-072S-MY3	230	15	72	N/A	N/A	RGBW	80/90	500	120	

*The strip light will come with 5 meters /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



BY-S4

BY-RS1

Item#	Discription
BY-S4	230V RGB/RGBW LED controller, support 50 meter RGB/RGBW strip light
BY-RS1	230V remote board work with BY-S4

432CHIPS 230V COB SINGLE COLOR STRIP LIGHT



230V AC 12mm COB 432 Chip SINGLE Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-FCOB27-230CV-432S-MY3	230	12	120	1080	90	2700	80/90	166	180	
S10WXX-FCOB30-230CV-432S-MY3	230	12	120	1140	95	3000	80/90	166	180	
S10WXX-FCOB40-230CV-432S-MY3	230	12	120	1200	100	4000	80/90	166	180	
S10WXX-FCOB60-230CV-432S-MY3	230	12	120	1140	95	6000	80/90	166	180	

*The strip light will come with 5 meters /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



2PCN-BTB-005

2PCN-BCB-005

2PCN-CTB-005

BY-RT1


BY-S3

Item#	Discription
2PCN-BTB-005	2pin Waterproof connector for strip and strip light , for 12mm width 230V COB strip light with 10mm PCB
2PCN-BCB-005	2pin Waterproof connector with 200mm wire for strip and strip light , for 12mm width 230V COB strip light with 10mm PCB
2PCN-CTB-005	2pin Waterproof connector for power and strip light , for 12mm width 230V COB strip light with 10mm PCB
BY-RT1	Remote for 230V led strip light
BY-S3	Controller for 230V led strip light


HIGH EFFICACY STRIP

HIGH EFFICACY

AOI
Aoi Advertising Promotion Inc.

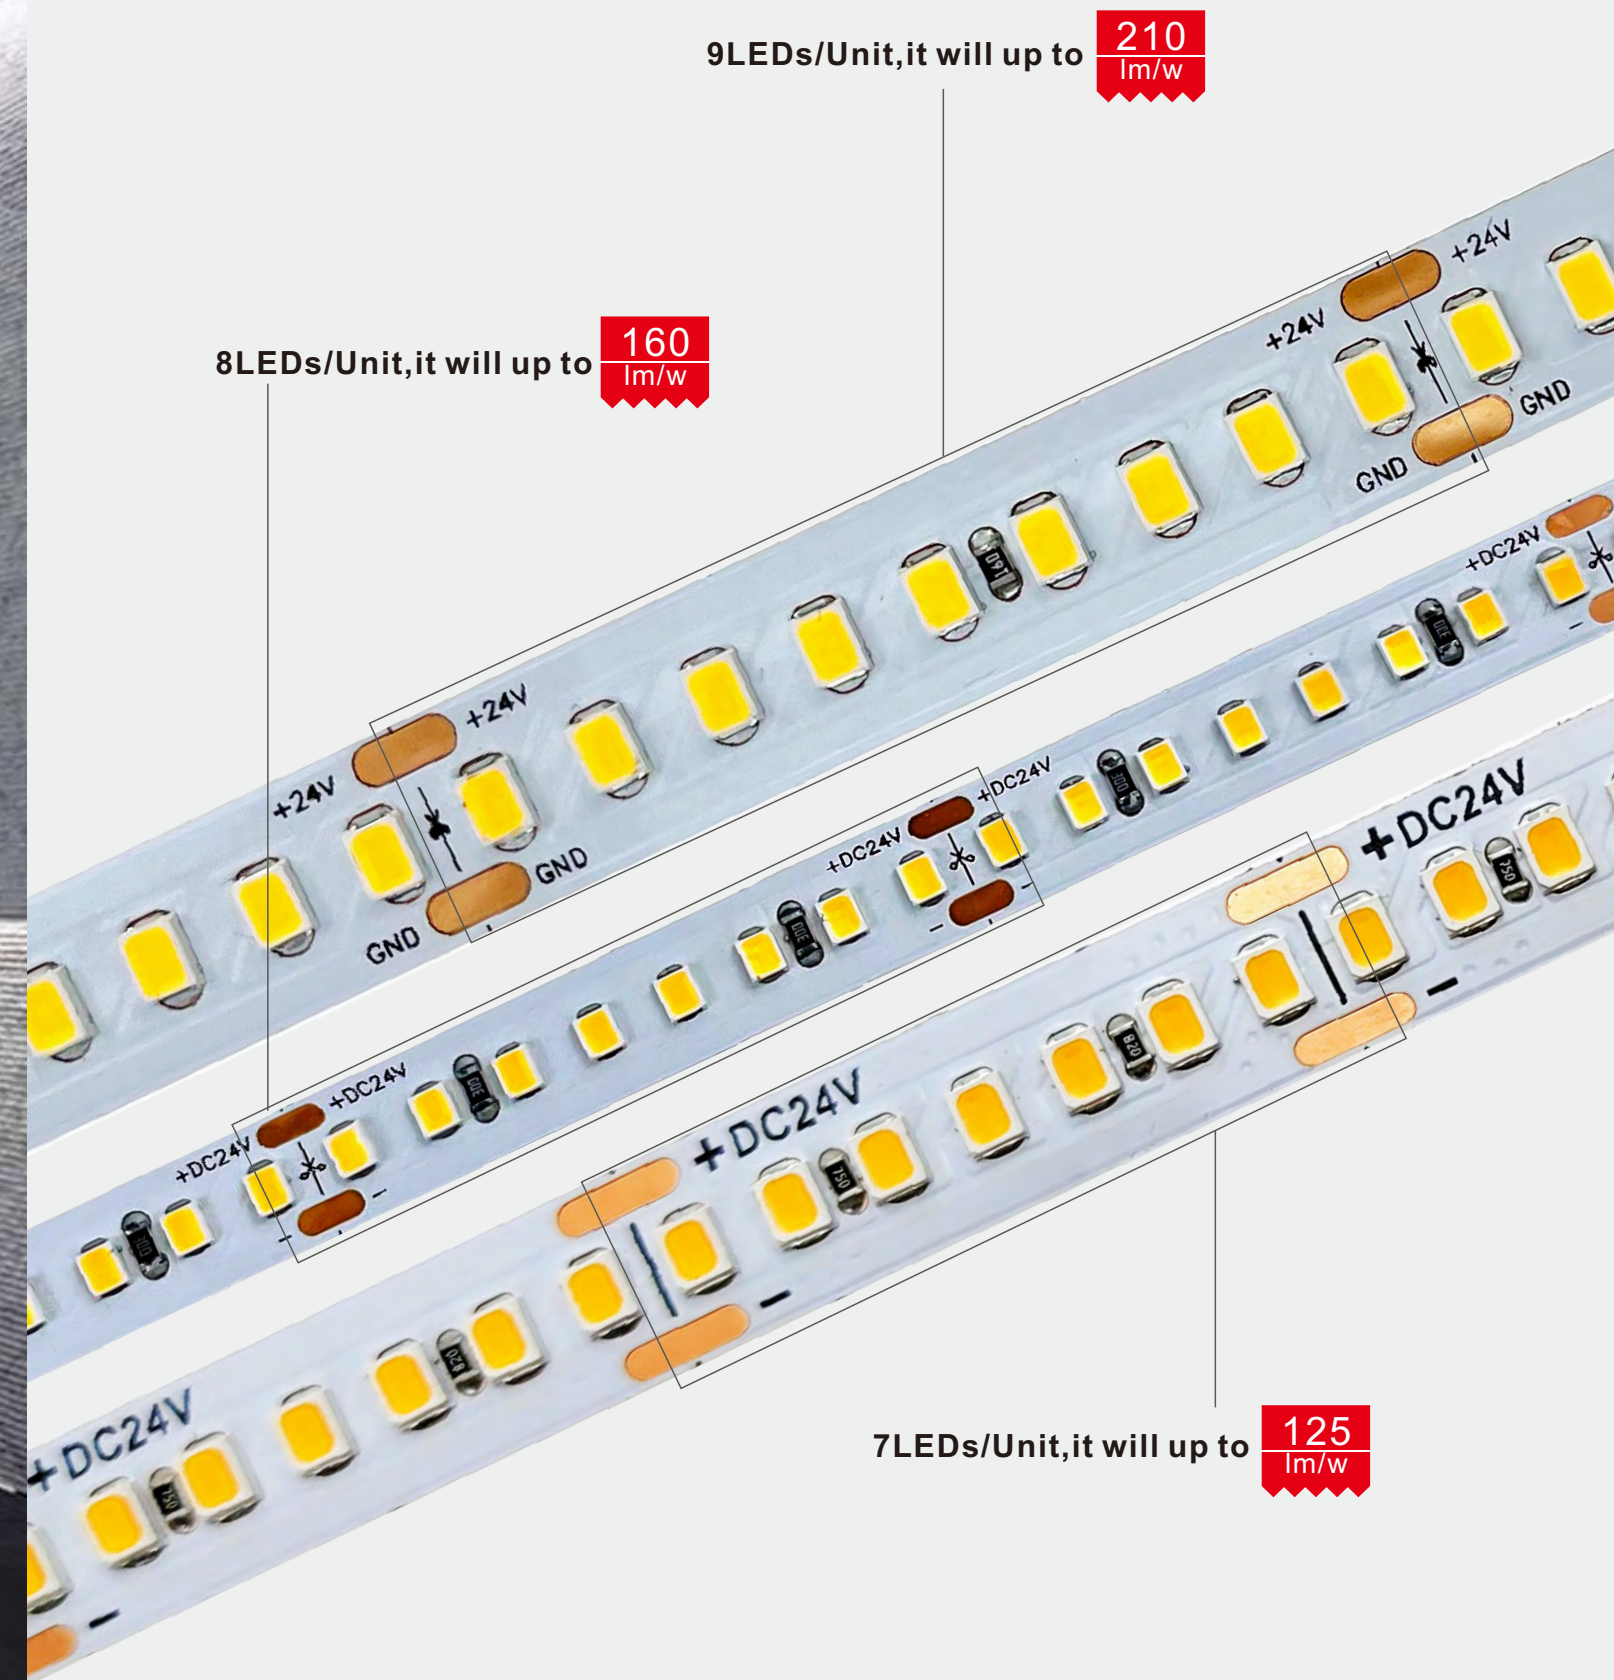


2835 8/10 MM 140LED WHITE

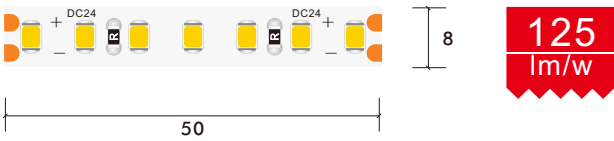

24V DC 8mm 2835 140LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S08WXX-283527-024CV-140S-MY3-HF	24	12	140	1320	110	2700	80/90	50	120	
S08WXX-283530-024CV-140S-MY3-HF	24	12	140	1440	120	3000	80/90	50	120	
S08WXX-283540-024CV-140S-MY3-HF	24	12	140	1500	125	4000	80/90	50	120	
S08WXX-283560-024CV-140S-MY3-HF	24	12	140	1440	120	6000	80/90	50	120	


*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



24V DC 10mm 2835 140LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-283527-024CV-140S-MY3-HF	24	14.4	140	1584	110	2700	80/90	50	120	
S10WXX-283530-024CV-140S-MY3-HF	24	14.4	140	1728	120	3000	80/90	50	120	
S10WXX-283540-024CV-140S-MY3-HF	24	14.4	140	1800	125	4000	80/90	50	120	
S10WXX-283560-024CV-140S-MY3-HF	24	14.4	140	1728	120	6000	80/90	50	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 10MM 210LED WHITE




24V DC 10mm 2835 210LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-283527-024CV-210S-MY3	24	18	210	1980	110	2700	80/90	33.3	120	
S10WXX-283530-024CV-210S-MY3	24	18	210	2160	120	3000	80/90	33.3	120	
S10WXX-283540-024CV-210S-MY3	24	18	210	2250	125	4000	80/90	33.3	120	
S10WXX-283560-024CV-210S-MY3	24	18	210	2160	120	6000	80/90	33.3	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



2216 6MM 210LED WHITE





24V DC	5mm 2216 210LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (°)
	S05WXX-221627-024CV-210S-MY3-HF	24	6	210	1900	120	2700	80/90	33.33	120
	S05WXX-221630-024CV-210S-MY3-HF	24	6	210	2000	120	3000	80/90	33.33	120
	S05WXX-221640-024CV-210S-MY3-HF	24	6	210	2100	125	4000	80/90	33.33	120
	S05WXX-221660-024CV-210S-MY3-HF	24	6	210	2000	125	6000	80/90	33.33	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




2835 6/8/10 MM 160LED WHITE

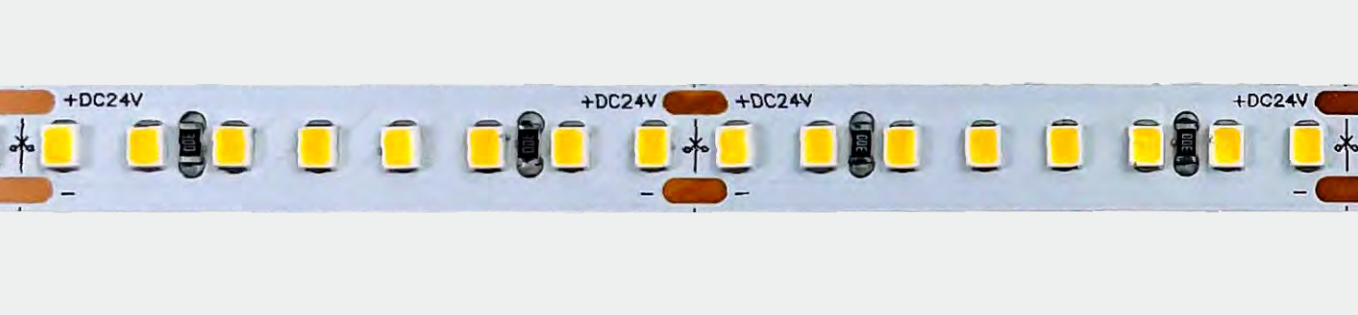


24V DC 6mm 2835 160LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S06WXX-283527-024CV-160S-MY3-HF	24	6	870	1020	145	2700	80/90	50	120	
S06WXX-283530-024CV-160S-MY3-HF	24	6	930	1080	155	3000	80/90	50	120	
S06WXX-283540-024CV-160S-MY3-HF	24	6	960	1140	160	4000	80/90	50	120	
S06WXX-283560-024CV-160S-MY3-HF	24	6	930	1080	155	6000	80/90	50	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




24V DC 8mm 2835 160LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S08WXX-283527-024CV-160S-MY3-HF	24	12	160	1740	145	2700	80/90	50	120	
S08WXX-283530-024CV-160S-MY3-HF	24	12	160	1860	155	3000	80/90	50	120	
S08WXX-283540-024CV-160S-MY3-HF	24	12	160	1920	160	4000	80/90	50	120	
S08WXX-283560-024CV-160S-MY3-HF	24	12	160	1860	155	6000	80/90	50	120	

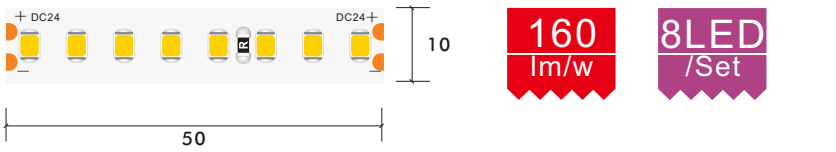

10mm 2835 160LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-283527-024CV-160S-MY3-HF	24	14.4	160	2088	145	2700	80/90	50	120	
S10WXX-283530-024CV-160S-MY3-HF	24	14.4	160	2232	155	3000	80/90	50	120	
S10WXX-283540-024CV-160S-MY3-HF	24	14.4	160	2304	160	4000	80/90	50	120	
S10WXX-283560-024CV-160S-MY3-HF	24	14.4	160	2232	155	6000	80/90	50	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 8MM 128LED WHITE





8mm 2835 128 LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S08WXX-283527-024CV-128S-MY3-HF	24	9.6	128	1392	145	2700	80/90	62.5	120	
S08WXX-283530-024CV-128S-MY3-HF	24	9.6	128	1488	155	3000	80/90	62.5	120	
S08WXX-283540-024CV-128S-MY3-HF	24	9.6	128	1536	160	4000	80/90	62.5	120	
S08WXX-283560-024CV-128S-MY3-HF	24	9.6	128	1488	155	6000	80/90	62.5	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

HIGH EFFICACY STRIP LIGHT

2835 10 MM 240LED WHITE

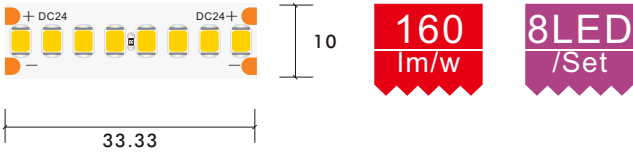
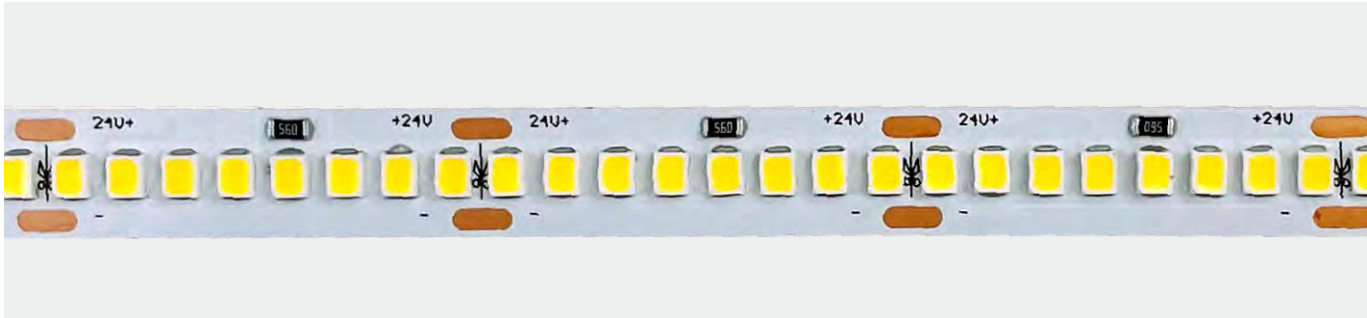


24V DC	10mm 2835 240LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10WXX-283527-024CV-240S-MY3-HF	24	20	240	2900	145	2700	80/90	33.3	120
	S10WXX-283530-024CV-240S-MY3-HF	24	20	240	3100	155	3000	80/90	33.3	120
	S10WXX-283540-024CV-240S-MY3-HF	24	20	240	3200	160	4000	80/90	33.3	120
	S10WXX-283560-024CV-240S-MY3-HF	24	20	240	3100	155	6000	80/90	33.3	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

HIGH EFFICACY STRIP LIGHT

2835 10MM 180LED WHITE

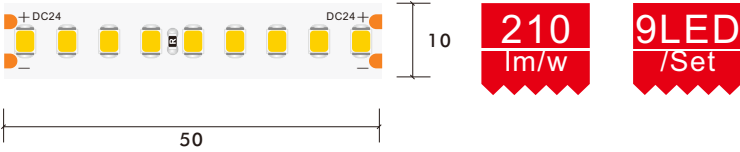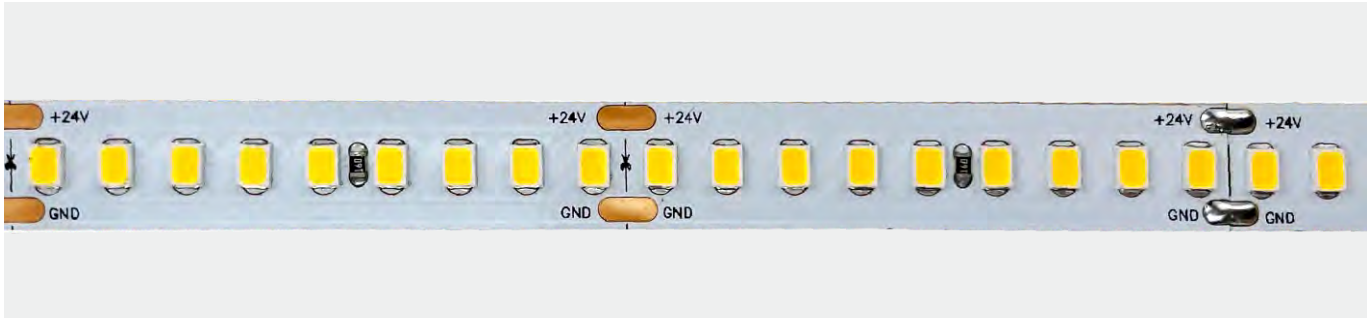

24V DC	10mm 2835 180LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10WXX-283527-024CV-180S-MY3-HF	24	8.6	180	1900	190	2700	80/90	50	120
	S10WXX-283530-024CV-180S-MY3-HF	24	8.6	180	2000	200	3000	80/90	50	120
	S10WXX-283540-024CV-180S-MY3-HF	24	8.6	180	2100	210	4000	80/90	50	120
	S10WXX-283560-024CV-180S-MY3-HF	24	8.6	180	2000	200	6000	80/90	50	120


*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



LONG RUN STRIP LIGHT



2835 120LED WHITE ULTRA LONG STRIP

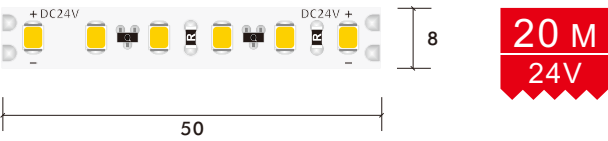


20 M
24V



24V DC 8mm 2835 120LED 20M Ultra Long LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S08WXX-283527-024CC-120S-MY3-L20	24	9	120	720	80	2700	80/90	50	120	
S08WXX-283530-024CC-120S-MY3-L20	24	9	120	765	85	3000	80/90	50	120	
S08WXX-283540-024CC-120S-MY3-L20	24	9	120	810	90	4000	80/90	50	120	
S08WXX-283560-024CC-120S-MY3-L20	24	9	120	765	85	6000	80/90	50	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

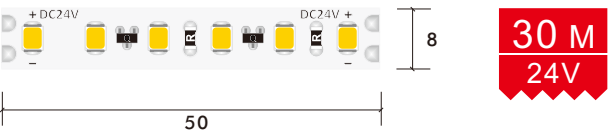


30 M
24V



24V DC 8mm 2835 120LED 30M Ultra Long LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S08WXX-283527-024CC-120S-MY3-L30	24	9	120	720	80	2700	80/90	50	120	
S08WXX-283530-024CC-120S-MY3-L30	24	9	120	765	85	3000	80/90	50	120	
S08WXX-283540-024CC-120S-MY3-L30	24	9	120	810	90	4000	80/90	50	120	
S08WXX-283560-024CC-120S-MY3-L30	24	9	120	765	85	6000	80/90	50	120	

5050 CCT Tunable Constant current

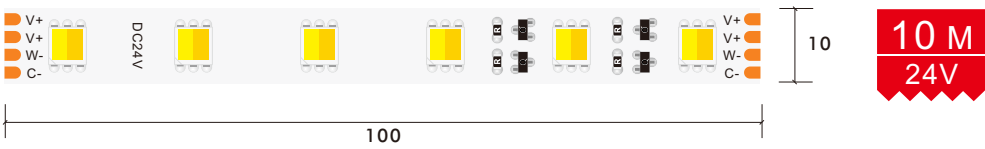

10 M
24V




24V DC 10mm 5050 60LED CCT Tunable Ultra Long LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-5050TW-024CC-060S-MY3-L10	24	10	60	950	95	CCT	80/90	100	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




5050 RGB ULTRA LONG STRIP

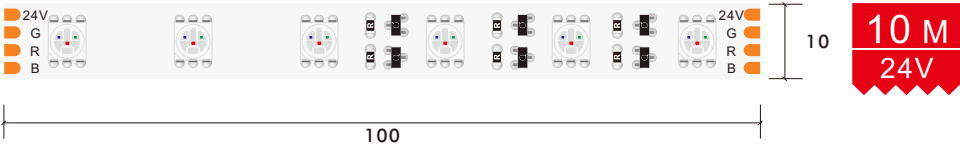

24V DC	10mm 5050 60LED RGB 10M Ultra Long LED Strip	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
		S10WXX-5050TC-024CC-060S-MY3-L10	24	8	60	N/A	N/A	RGB	80/90	100	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

5050 RGBW ULTRA LONG STRIP

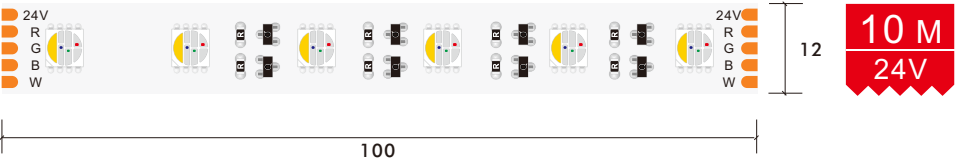


24V DC	12mm 5050 60LED RGBW 10M Ultra Long LED Strip	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
		S12WXX-5050MC-024CC-060S-MY3-L10	24	12	60	N/A	N/A	RGBW	80/90	100	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68





48V STRIP LIGHT

48V LED STRIP

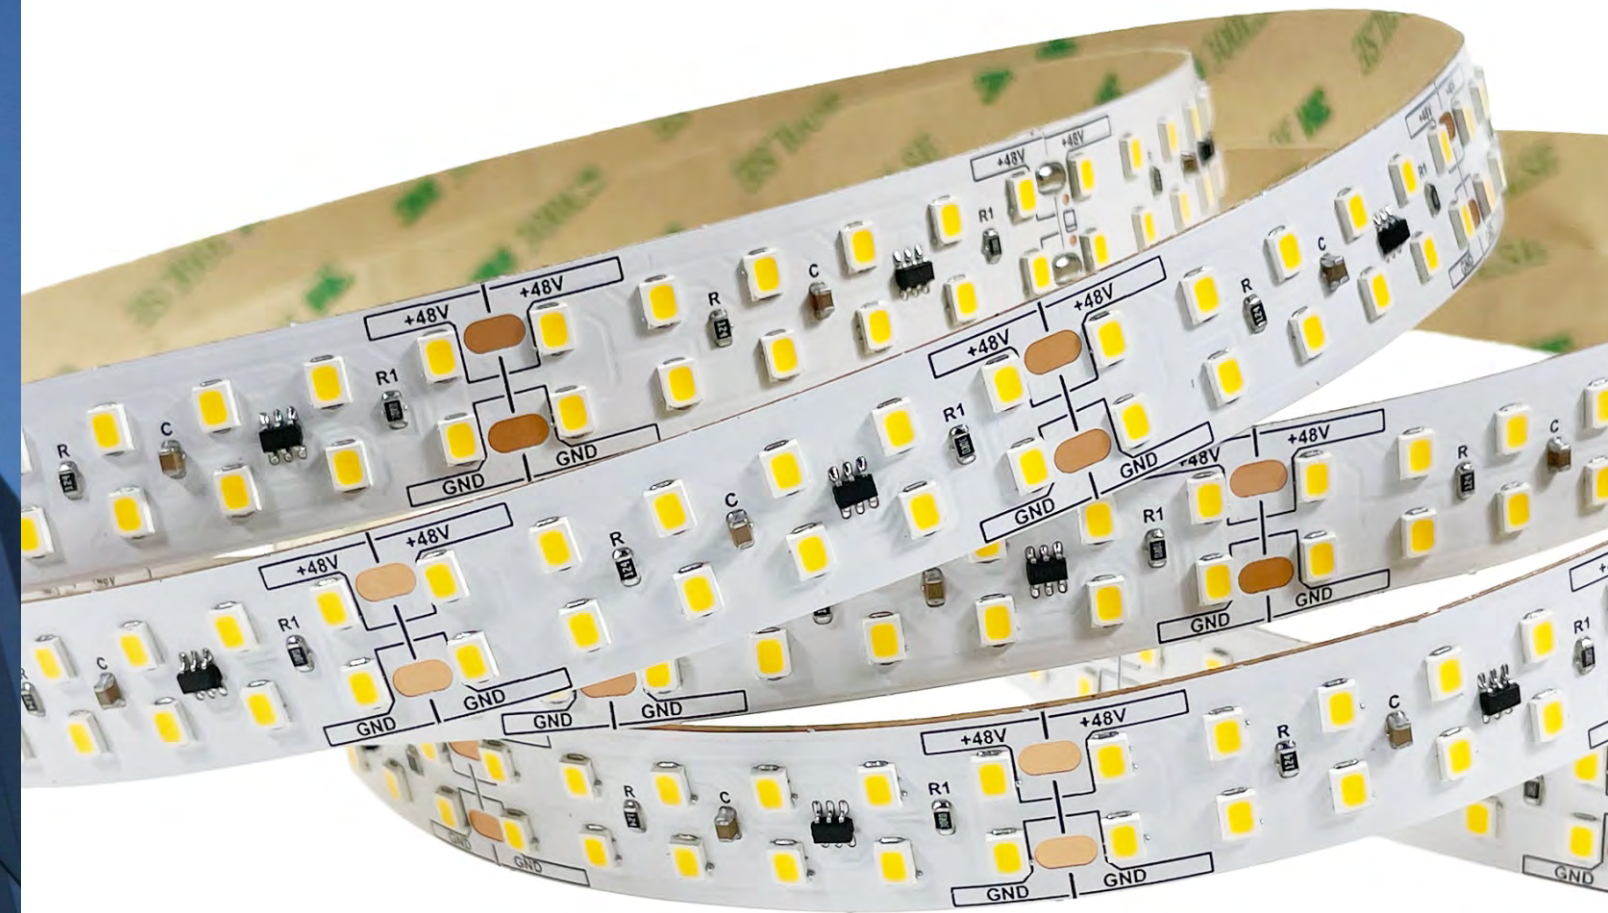



2835 15 MM 240LED WHITE

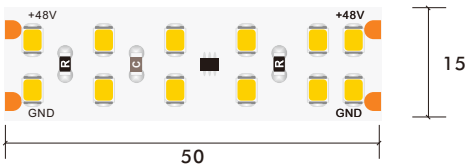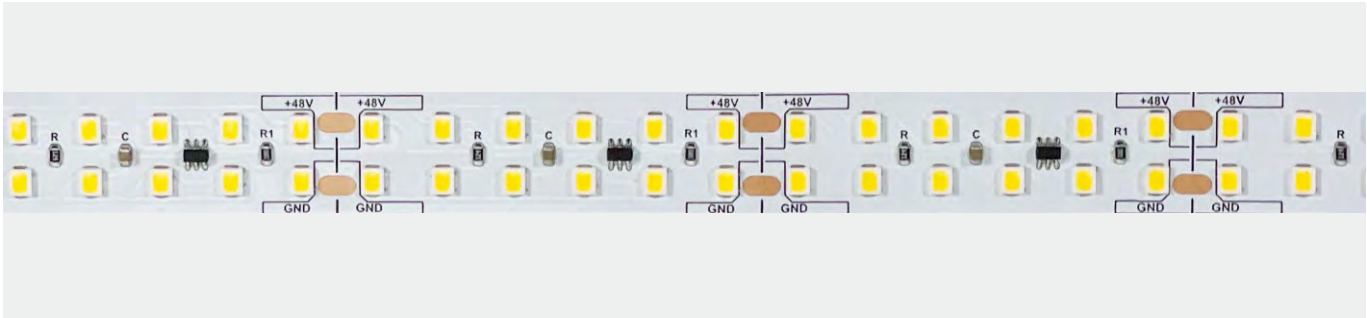

48V DC	48V 15mm 2835 240LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S15WXX-283527-048CV-240S-MY3	48	12	240	1520	80	2700	80/90	50	120
	S15WXX-283530-048CV-240S-MY3	48	12	240	1615	85	3000	80/90	50	120
	S15WXX-283540-048CV-240S-MY3	48	12	240	1805	95	4000	80/90	50	120
	S15WXX-283560-048CV-240S-MY3	48	12	240	1786	94	6000	80/90	50	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 10MM 120LED WHITE

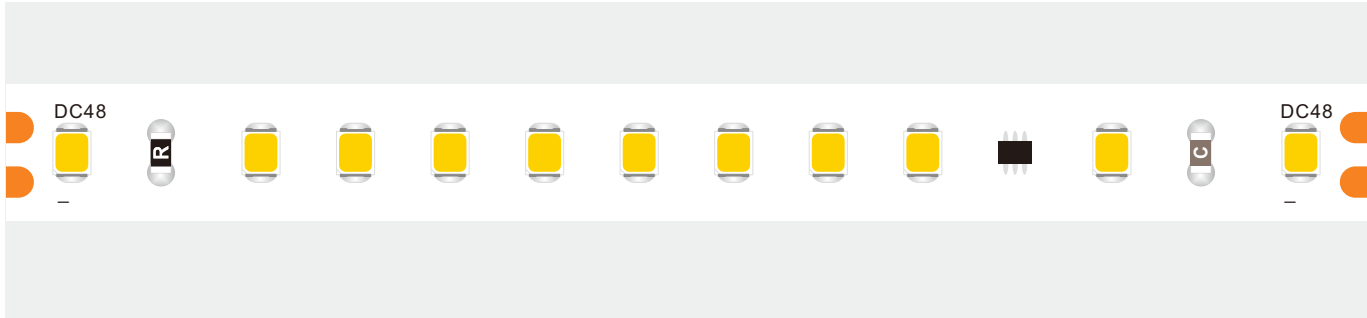


48V DC	48V 10mm 2835 120LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10WXX-283527-048CV-120S-MY3	48	10	120	850	85	2700	80/90	100	120
	S10WXX-283530-048CV-120S-MY3	48	10	120	900	90	3000	80/90	100	120
	S10WXX-283540-048CV-120S-MY3	48	10	120	950	95	4000	80/90	100	120
	S10WXX-283560-048CV-120S-MY3	48	10	120	910	91	6000	80/90	100	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68





MINI CUT STRIP LIGHT

From 8.3 to 16.7mm

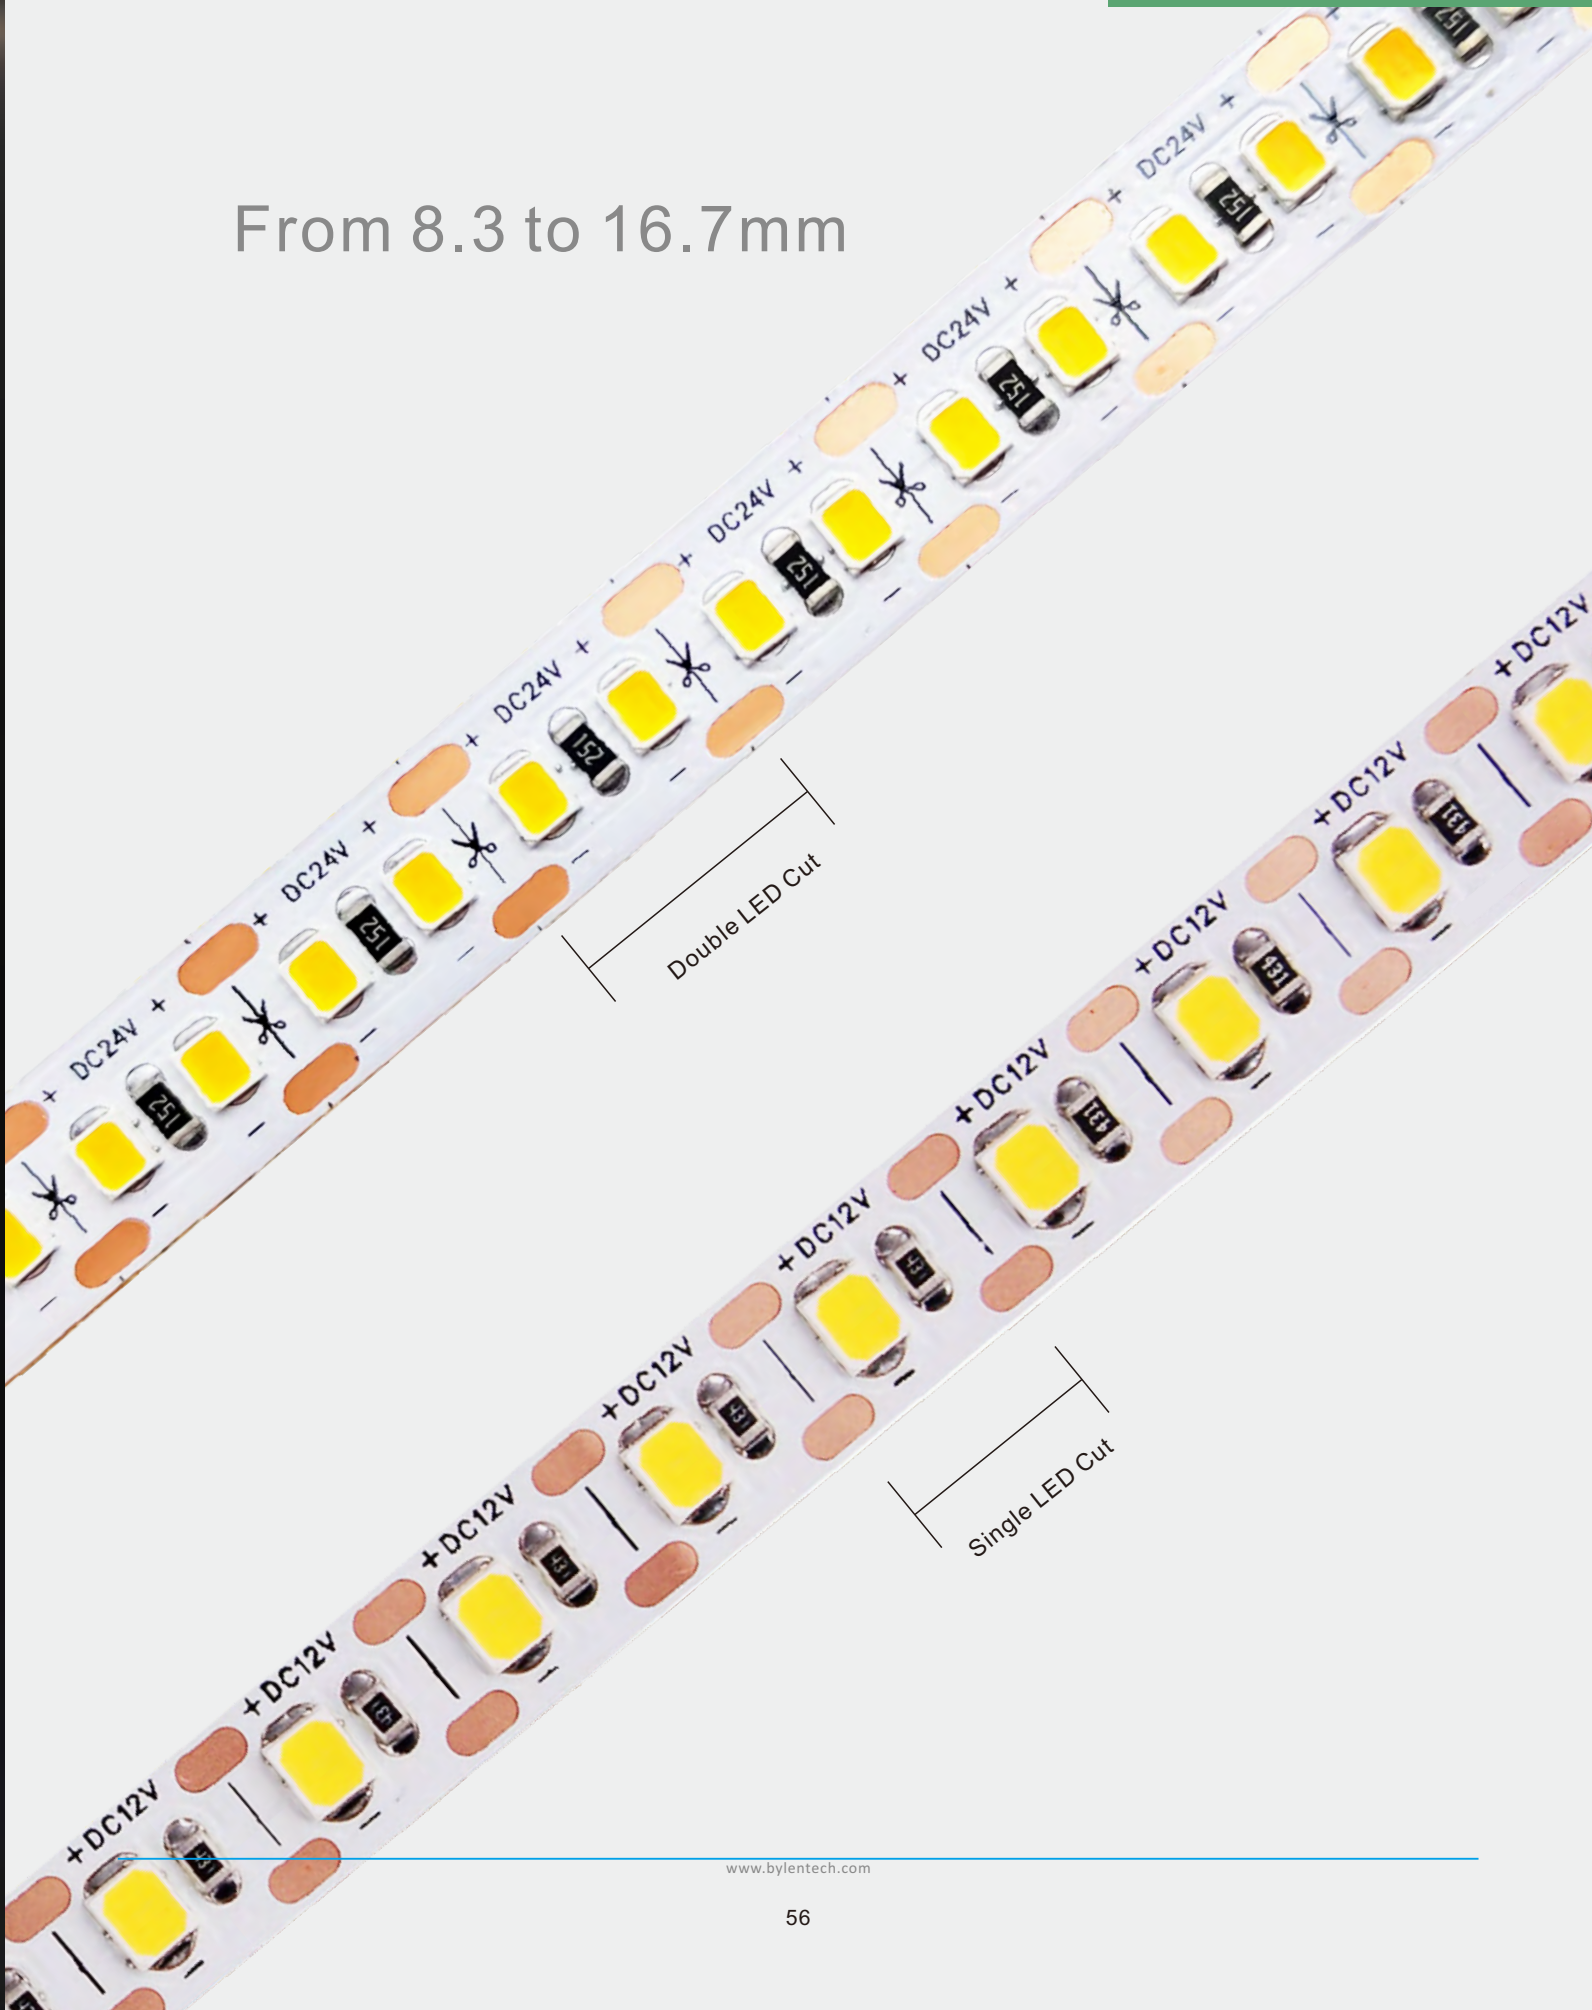


MINI CUT LED STRIP (SINGLE LED CUT)

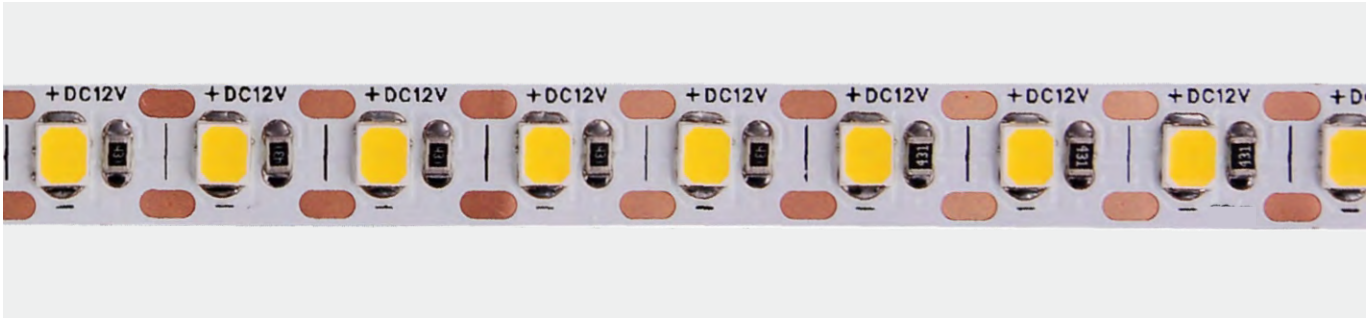

24V DC	5mm 2835 120LED Single Color Mini Cut LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S05WXX-283527-024CV-120S-MY3-MC1	24	6	120	480	80	2700	80/90	8.33	120
	S05WXX-283530-024CV-120S-MY3-MC1	24	6	120	510	85	3000	80/90	8.33	120
	S05WXX-283540-024CV-120S-MY3-MC1	24	6	120	540	90	4000	80/90	8.33	120
	S05WXX-283560-024CV-120S-MY3-MC1	24	6	120	510	85	6000	80/90	8.33	120


*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



24V DC	8mm 2835 120LED Single Color Mini Cut LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S08WXX-283527-024CV-120S-MY3-MC1	24	9.6	120	768	80	2700	80/90	8.33	120
	S08WXX-283530-024CV-120S-MY3-MC1	24	9.6	120	816	85	3000	80/90	8.33	120
	S08WXX-283540-024CV-120S-MY3-MC1	24	9.6	120	864	90	4000	80/90	8.33	120
	S08WXX-283560-024CV-120S-MY3-MC1	24	9.6	120	816	85	6000	80/90	8.33	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

MINI CUT LED STRIP (DOUBLE LEDS CUT)





24V DC	6mm 2835 160LED Single Color Mini Cut LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S06WXX-283527-024CV-160S-MY3-MC2	24	6	160	480	80	2700	80/90	12.5	120
	S06WXX-283530-024CV-160S-MY3-MC2	24	6	160	510	85	3000	80/90	12.5	120
	S06WXX-283540-024CV-160S-MY3-MC2	24	6	160	540	90	4000	80/90	12.5	120
	S06WXX-283560-024CV-160S-MY3-MC2	24	6	160	510	85	6000	80/90	12.5	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



MINI CUT LED STRIP (DOUBLE LEDS CUT)

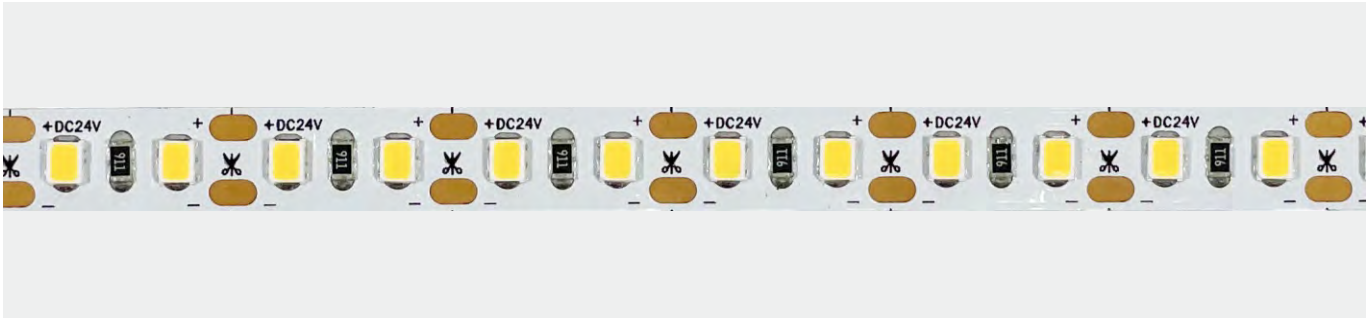


24V DC	8mm 2835 120LED Single Color Mini Cut LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S08WXX-283527-024CV-120S-MY3-MC2	24	12	120	960	80	2700	80/90	16.67	120
	S08WXX-283530-024CV-120S-MY3-MC2	24	12	120	1020	85	3000	80/90	16.67	120
	S08WXX-283540-024CV-120S-MY3-MC2	24	12	120	1080	90	4000	80/90	16.67	120
	S08WXX-283560-024CV-120S-MY3-MC2	24	12	120	1020	85	6000	80/90	16.67	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under Ip20. it is different with IP65, IP66, IP67, IP68




MINI CUT LED STRIP (DOUBLE LEDS CUT)





24V DC	10mm 2835 168LED Single Color Mini Cut LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10WXX-283527-024CV-168S-MY3-MC2	24	16.8	168	1344	80	2700	80/90	11.9	120
	S10WXX-283530-024CV-168S-MY3-MC2	24	16.8	168	1428	85	3000	80/90	11.9	120
	S10WXX-283540-024CV-168S-MY3-MC2	24	16.8	168	1512	90	4000	80/90	11.9	120
	S10WXX-283560-024CV-168S-MY3-MC2	24	16.8	168	1428	85	6000	80/90	11.9	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

Tunable CCTSTRIP LIGHT

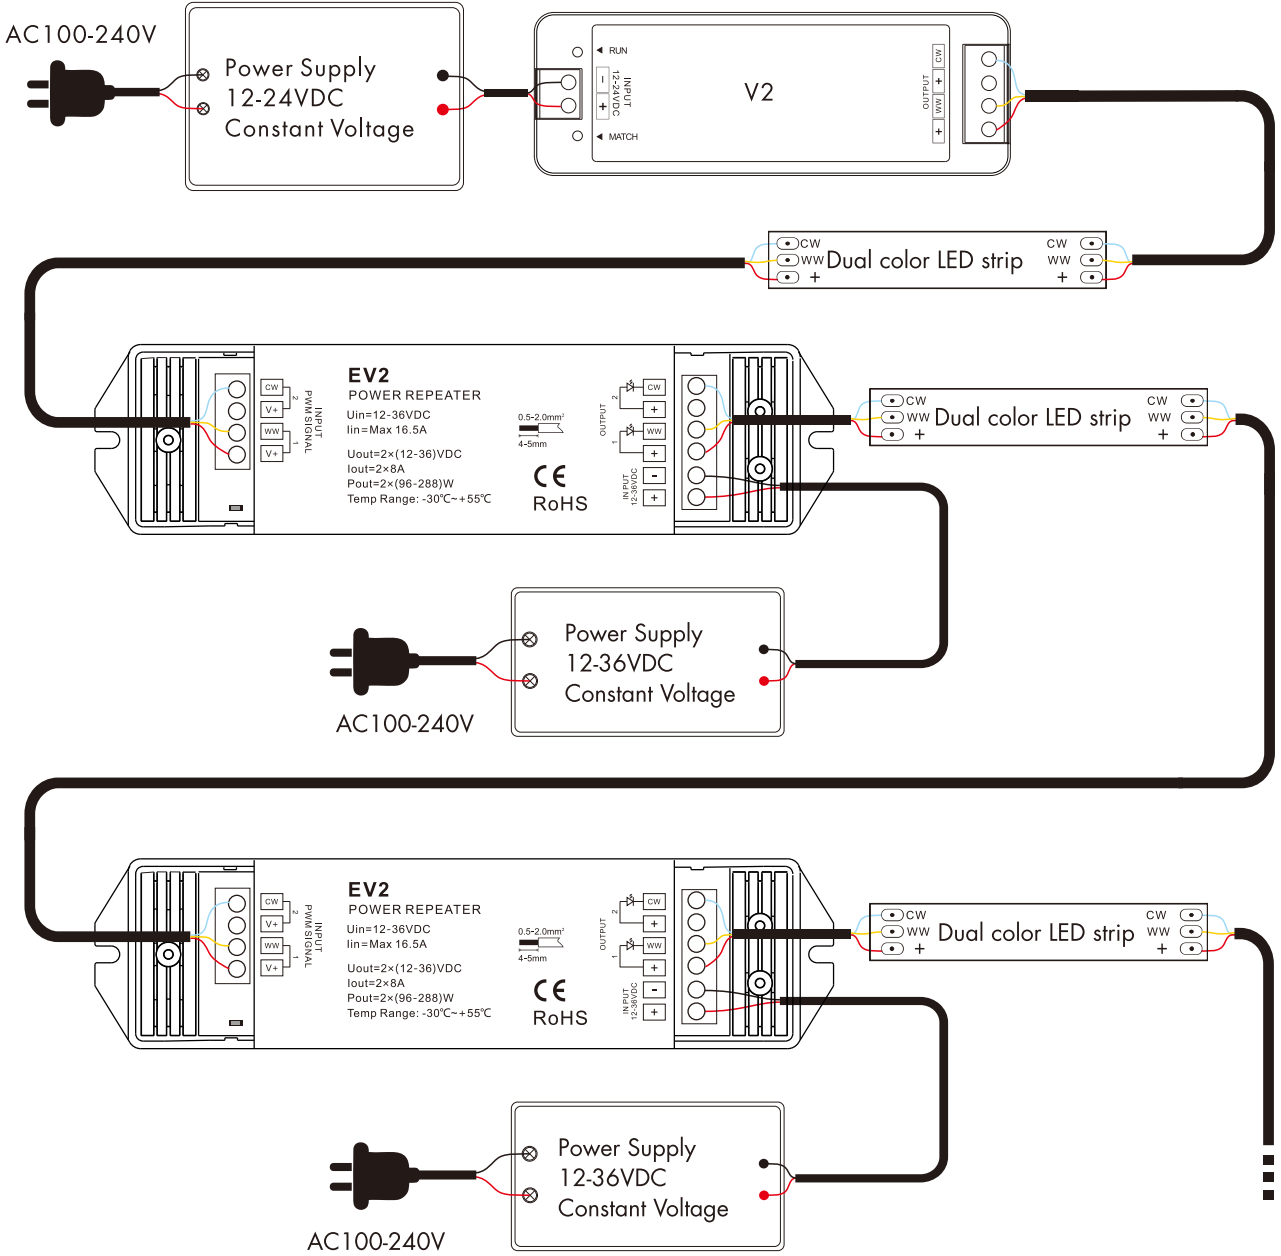

2835 8mm CCT LED Strip

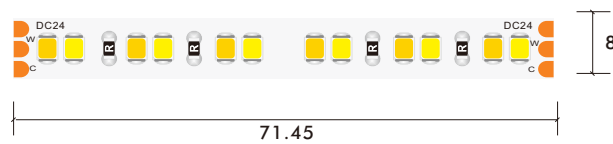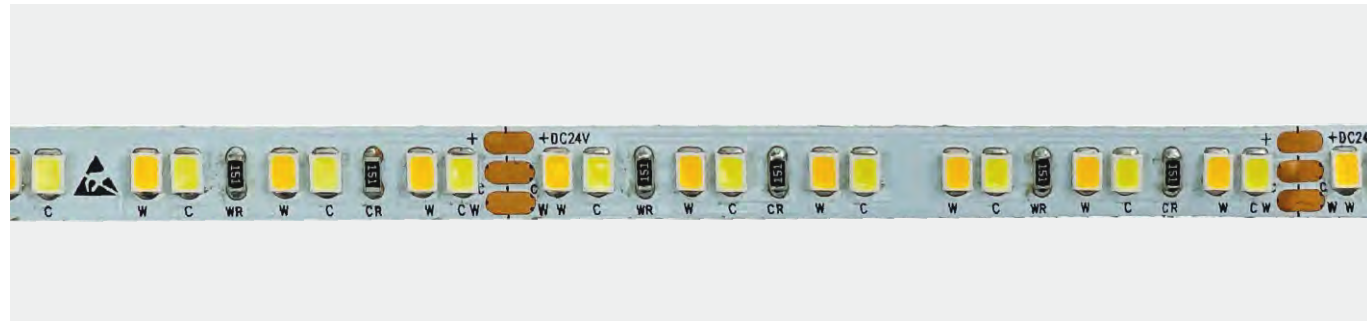



24V DC	8mm 2835 168LED CCT Color Tunable LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
	S08WXX-2835TW-024CV-168S-MY3	24	14.4	168	1152	80	CCT	80/90	71.4	120

*The strip light will come with 5 meter /reel

*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




2216 8 / 10 MM 240LED CCT LED Strip

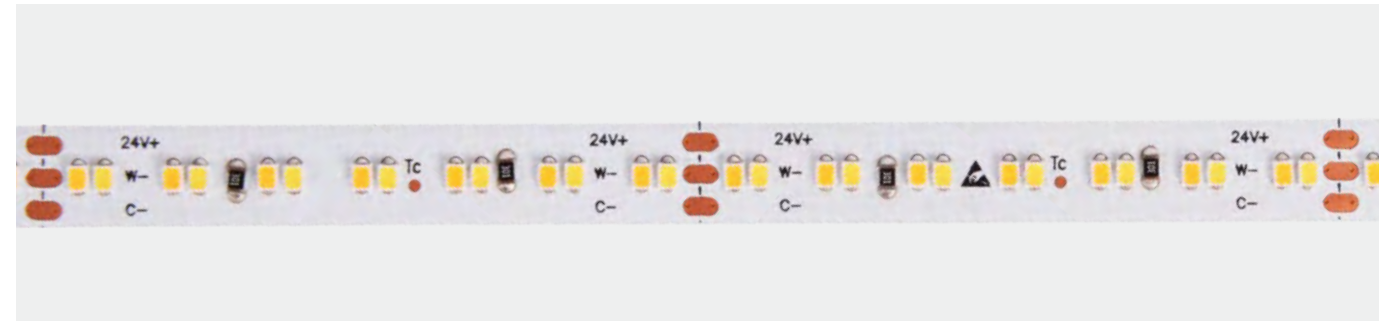

24V DC	8mm 2216 240LED CCT Color Tunable LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S08WXX-2835TW-024CV-240S-MY3	24	14.4	240	1152	80	CCT	90	50	120

*The strip light will come with 5 meter /reel

*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



24V DC	10mm 2216 240LED CCT Color Tunable LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10WXX-2216TW-024CV-240S-MY3	24	16.8	240	1344	80	CCT	90	50	120

*The strip light will come with 5 meter /reel

*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




DIM TO WARM LED STRIP

DIM TO WARM LED STRIP


DIM TO WARM

2216 10 MM 224LED DIM TO WARM LED Strip

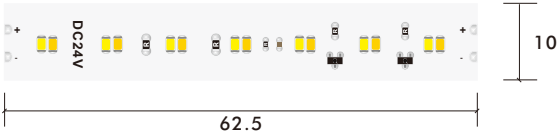


24V DC	10mm 2216 224LED DIM TO WARM LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10W20-221618-024CV-224S-MY3-DTW	24	15	224	1150	85	1800K-3000K	90	62.5	120
	S10W20-221630-024CV-224S-MY3-DTW	24	15	224	1350	90	3000K-6000K	90	62.5	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


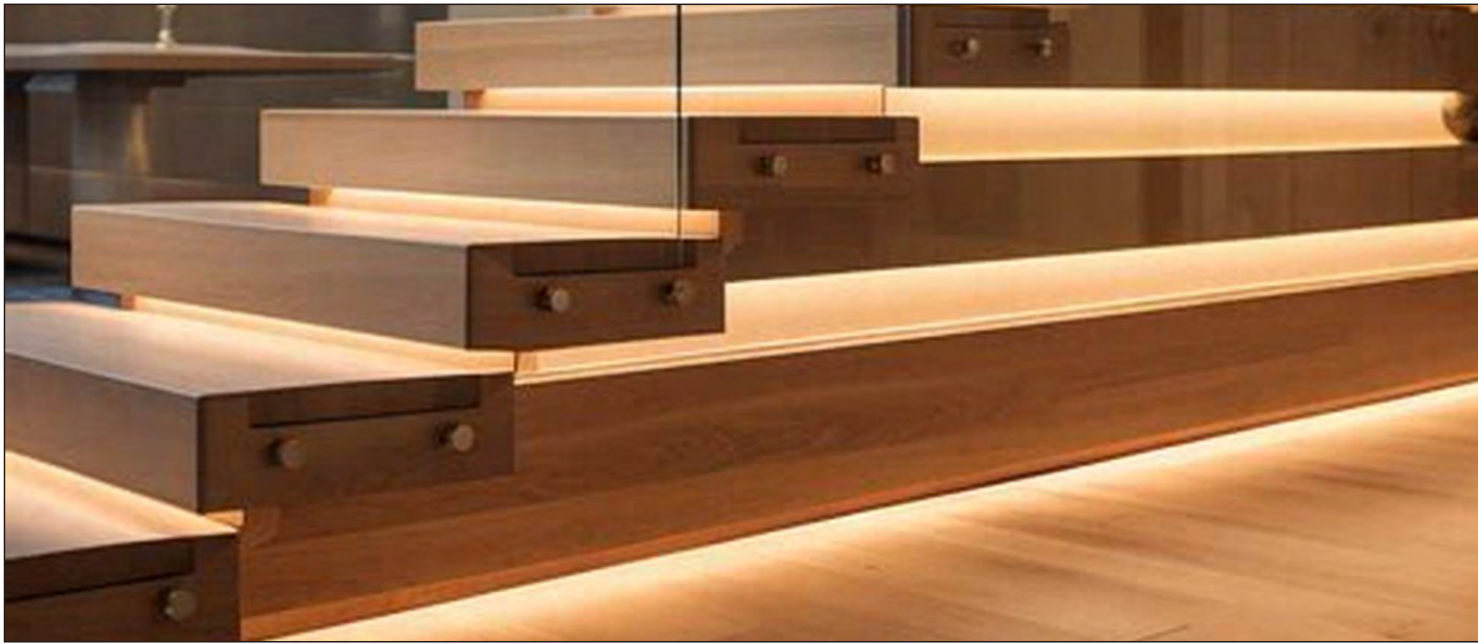


RGB STRIP LIGHT

RGB STRIP

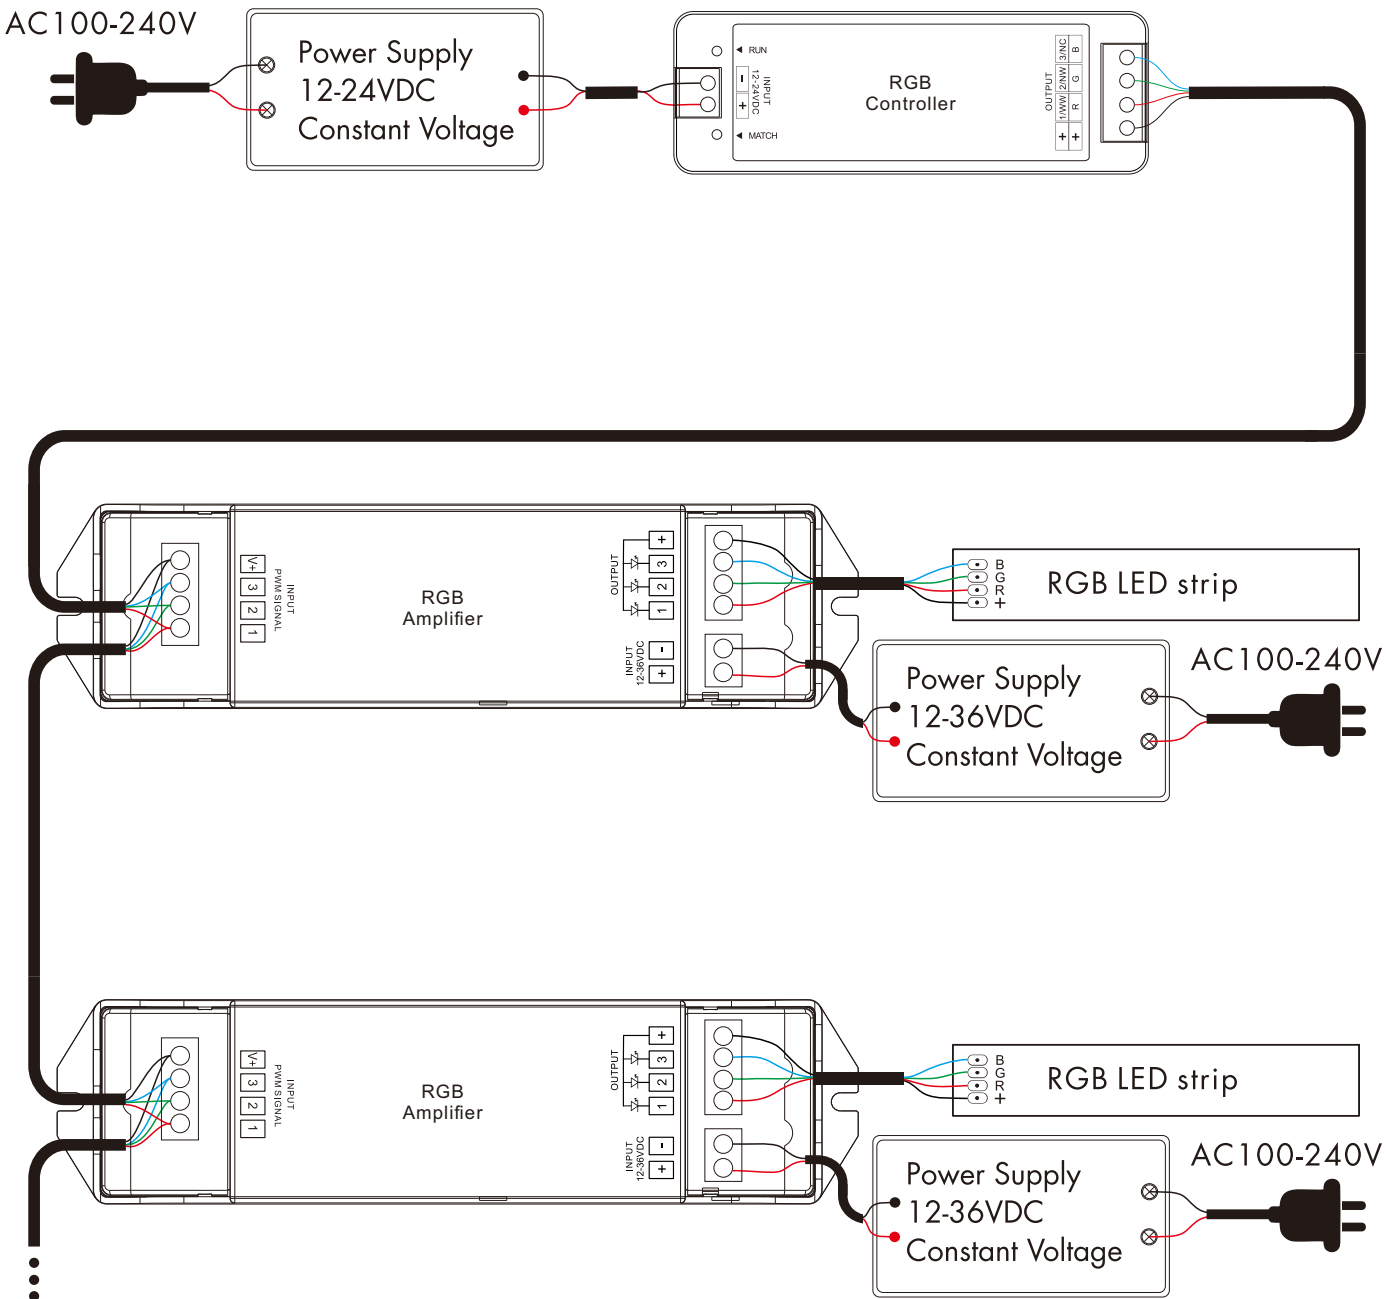


5050 10MM 60LED RGB LED Strip

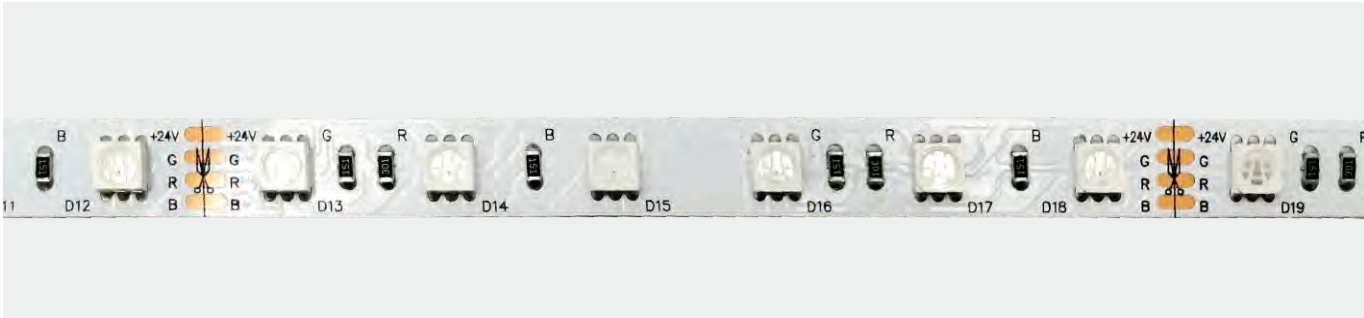

12V DC 10mm 5050 60LED RGB Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-5050TC-012CV-060S-MY3	12	14.4	060	N/A	N/A	RGB	80/90	50	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68





24V DC 10mm 5050 60LED RGB Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-5050TC-024CV-060S-MY3	24	14.4	060	N/A	N/A	RGB	80/90	100	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




3838 RGB LED STRIP LIGHT

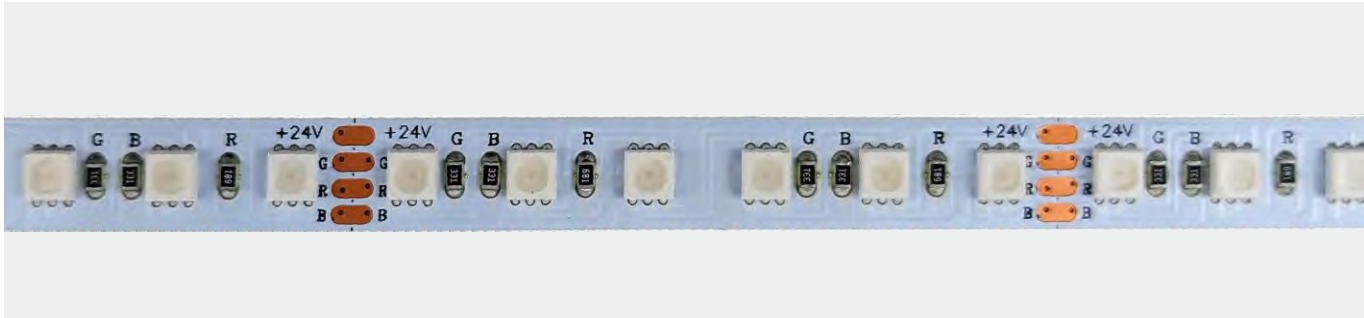


24V DC 8mm 3838 120LED RGB Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S08WXX-3838TC-024CV-120S-MY3	24	12	120	N/A	N/A	RGB	80/90	50	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



24V DC 10mm 3838 168LED RGB Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-3838TC-024CV-168S-MY3	24	16.8	168	N/A	N/A	RGB	80/90	35.7	120	



*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



24V DC 10mm 3838 240LED RGB Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-3838TC-024CV-240S-MY3	24	19.2	240	N/A	80	RGB	80/90	25	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


4040 10MM 120LED RGB LED Strip

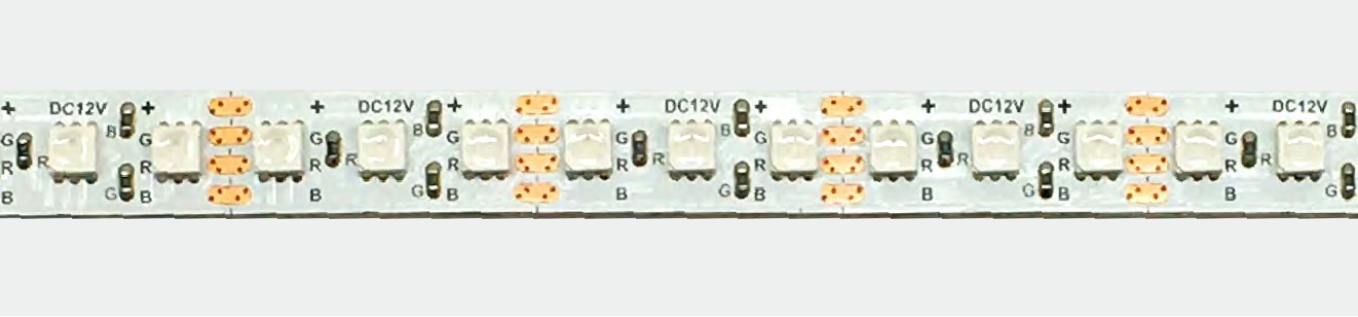

24V DC	8mm 40400 120LED RGB Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10WXX-4040TC-024CV-120S-MY3	24	19.2	120	N/A	N/A	RGB	80/90	50	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 8MM 120LED RGB LED Strip




24V DC	8mm 2835 120LED RGB Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S08WXX-2835TC-024CV-120S-MY3	24	12	120	N/A	N/A	RGB	80/90	50	120


*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



RGBW STRIP LIGHT

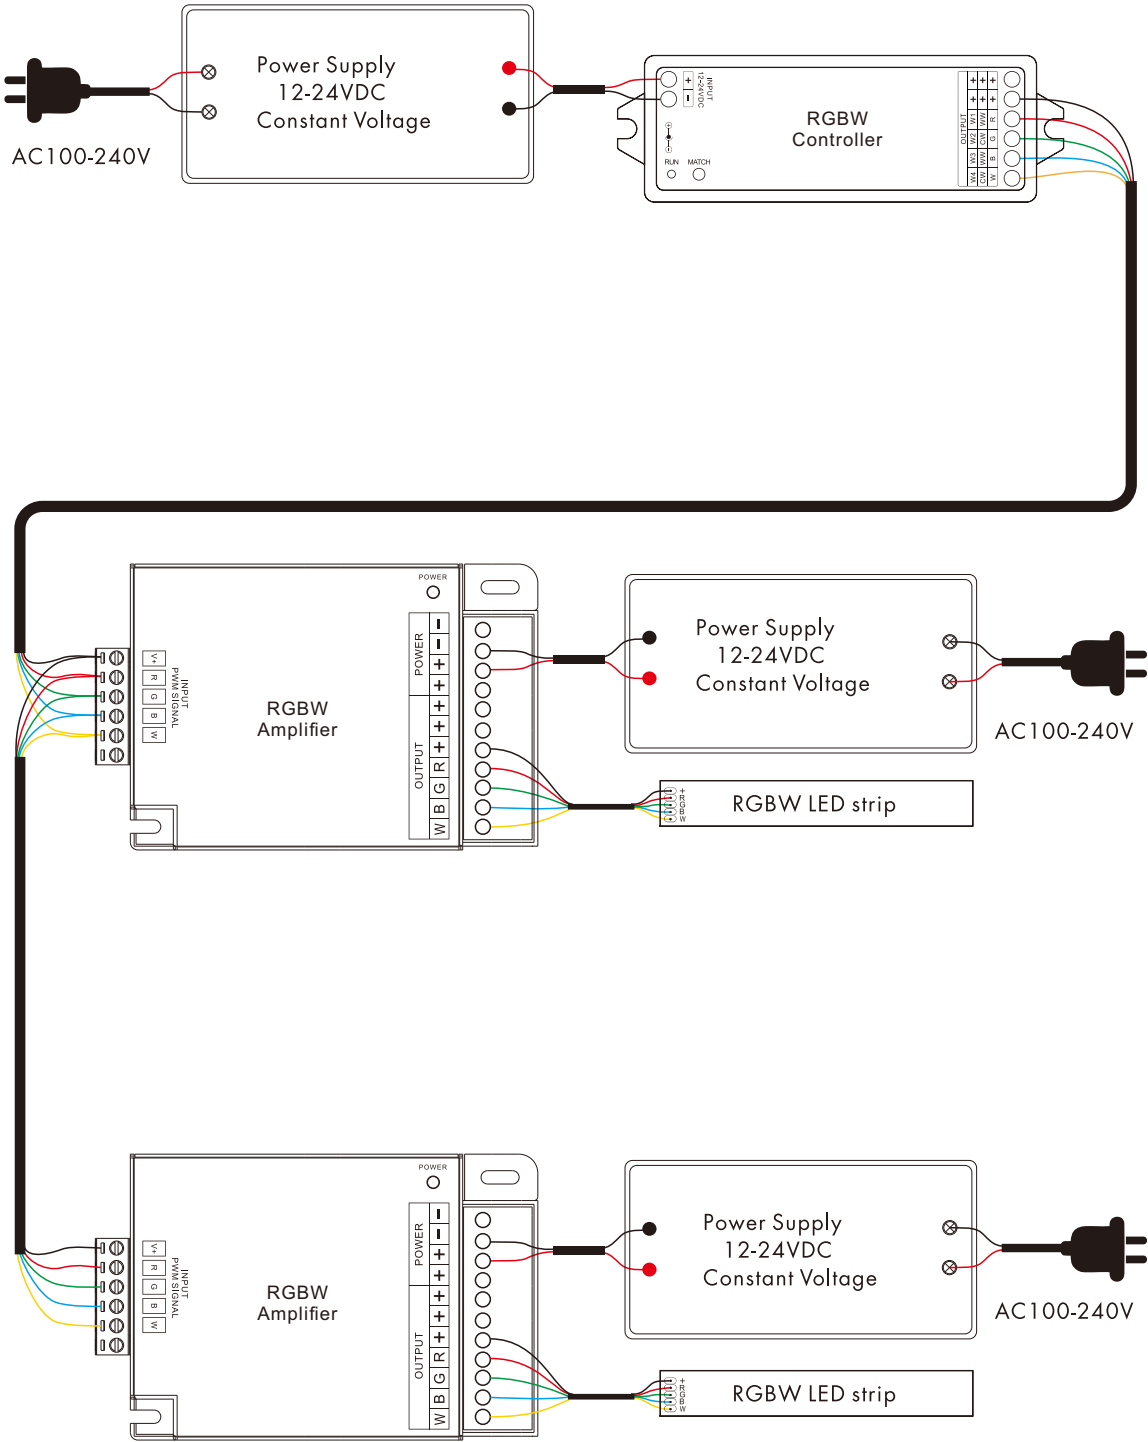


5050 RGBW LED Strip




12V DC 10mm 5050 60LED RGBW Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S12WXX-5050MC-012CV-060S-MY3	12	19.2	60	N/A	N/A	RGB	80/90	50	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

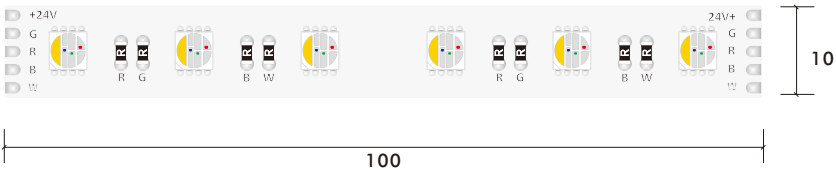

24V DC 10mm 5050 60LED RGBW Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-5050MC-024CV-060S-MY3	24	19.2	60	N/A	N/A	RGBW	80/90	100	120	


*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

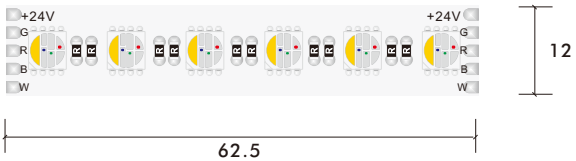

24V DC 12mm 5050 96LED RGBW Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S12WXX-5050MC-024CV-096S-MY3	24	23	96	N/A	N/A	RGBW	80/90	62.5	120	


*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

4040 10MM 126LED RGBW LED Strip



24V DC 8mm 4040 126LED RGBW Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S08WXX-4040MC-024CV-126S-MY3	24	16.8	126	N/A	N/A	RGBW	80/90	55.5	120	


*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

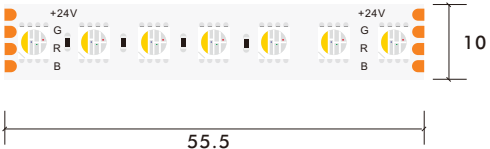


24V DC 10mm 4040 126LED RGBW Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-4040MC-024CV-126S-MY3	24	16.8	126	N/A	N/A	RGBW	80/90	55.5	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

RGBCCT STRIP LIGHT

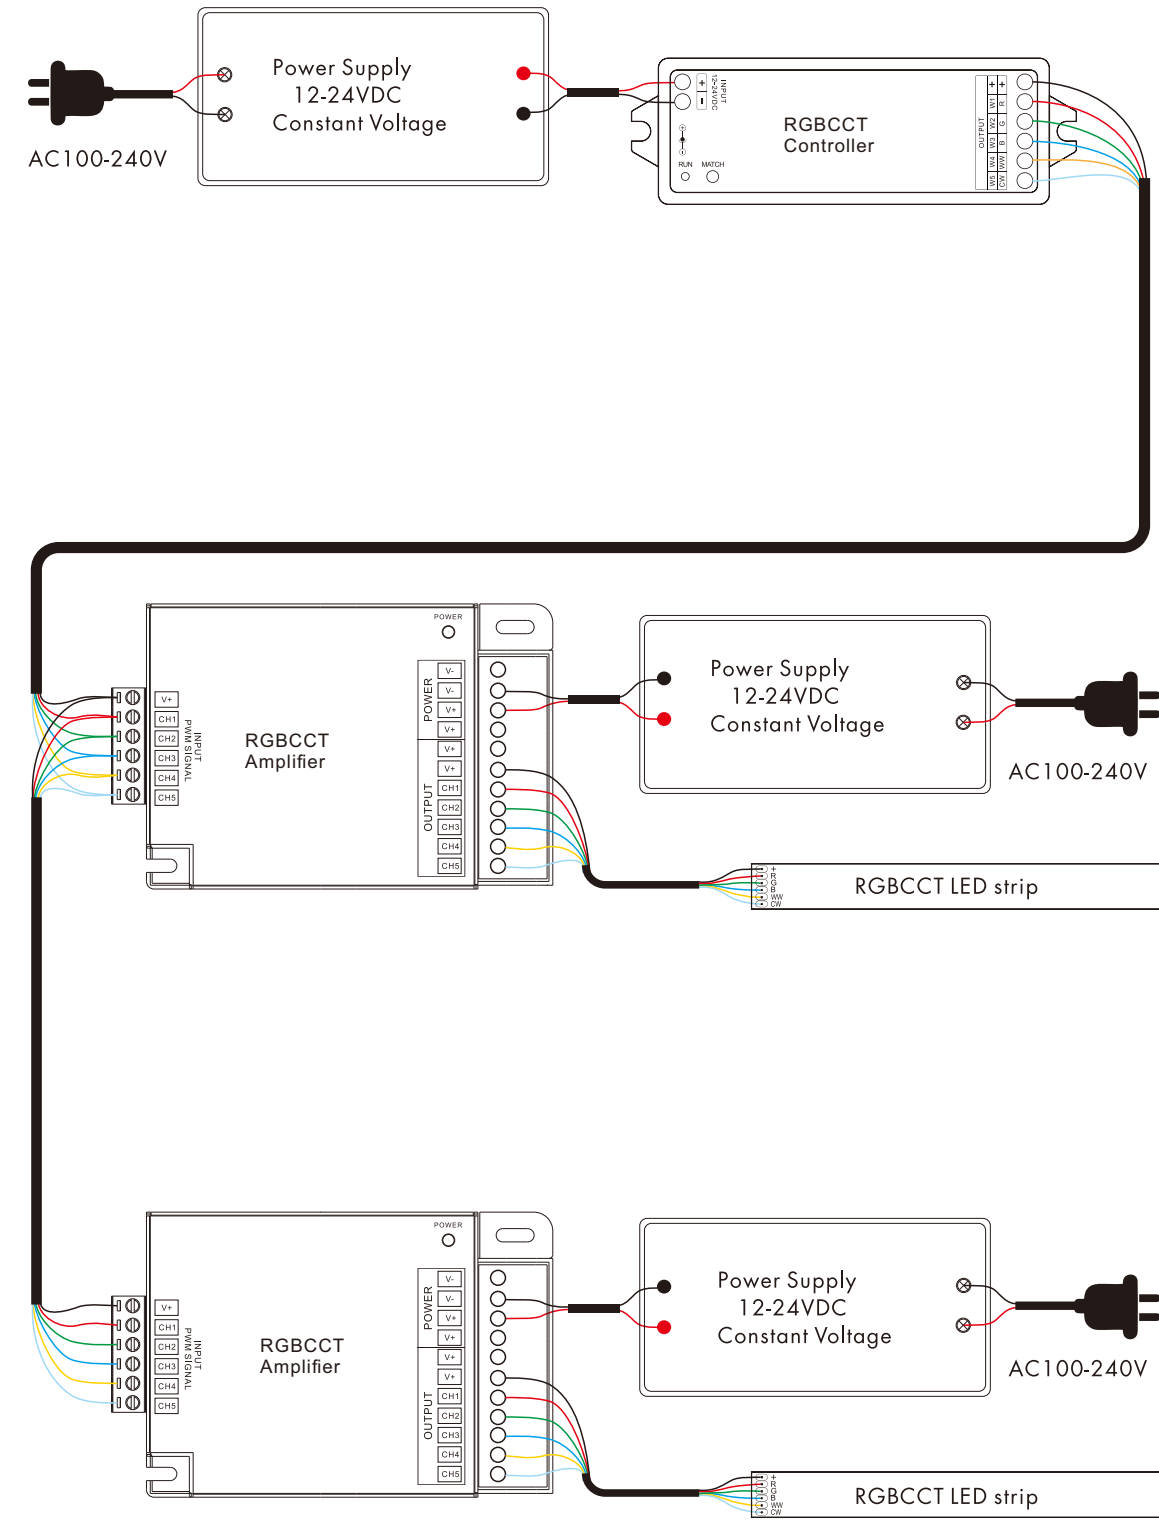


5050 10MM 60LED RGB CCT LED Strip

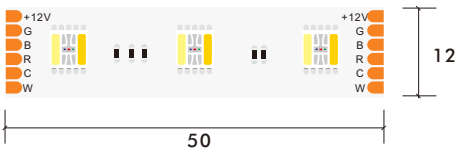

12V DC

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S12WXX-5050FC-012CV-060S-MY3	12	19.2	60	N/A	N/A	RGBWW	80/90	50	120


*The strip light will come with 5 meter /reel
 *All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

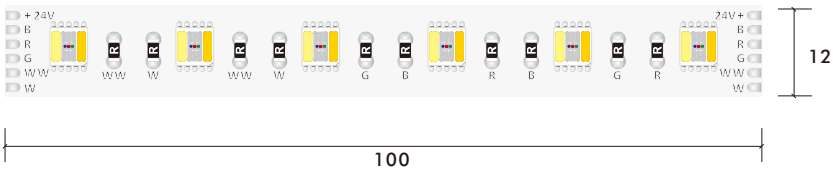

24V DC

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S12WXX-5050FC-024CV-060S-MY3	24	19.2	60	N/A	N/A	RGBW	80/90	100	120

*The strip light will come with 5 meter /reel
 *All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

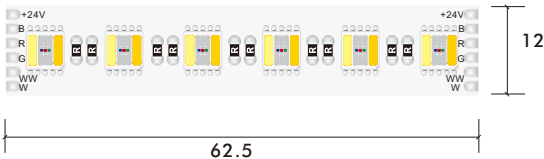

24V DC

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S12WXX-5050FC-024CV-096S-MY3	24	23	96	N/A	N/A	RGBWW	80/90	62.5	120

*The strip light will come with 5 meter /reel
 *All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




STANDARD STRIP LIGHT


PROJECT GUILD LINE

SINGLE COLOR


On and off

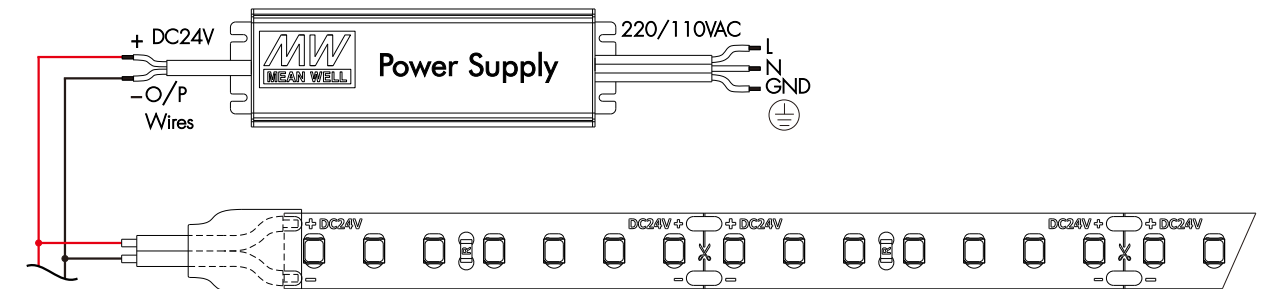


RF Dimming System

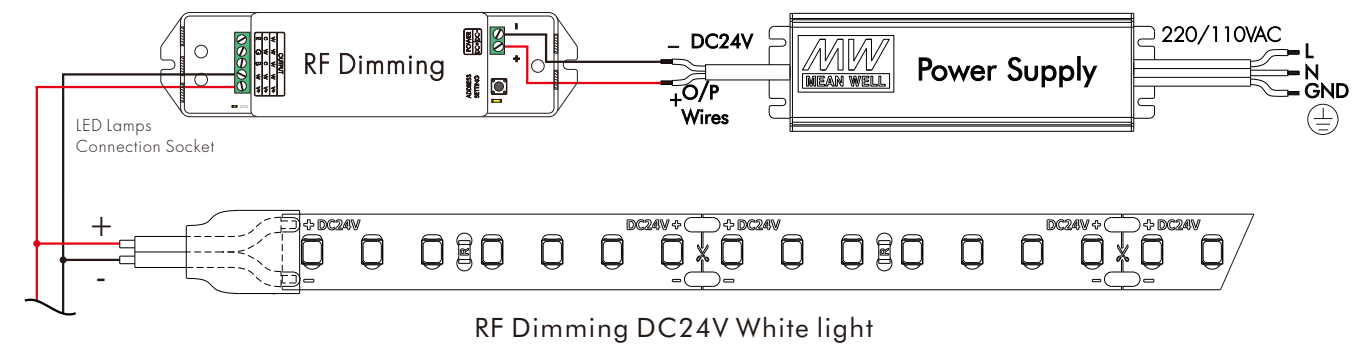


0-10V Dimming System

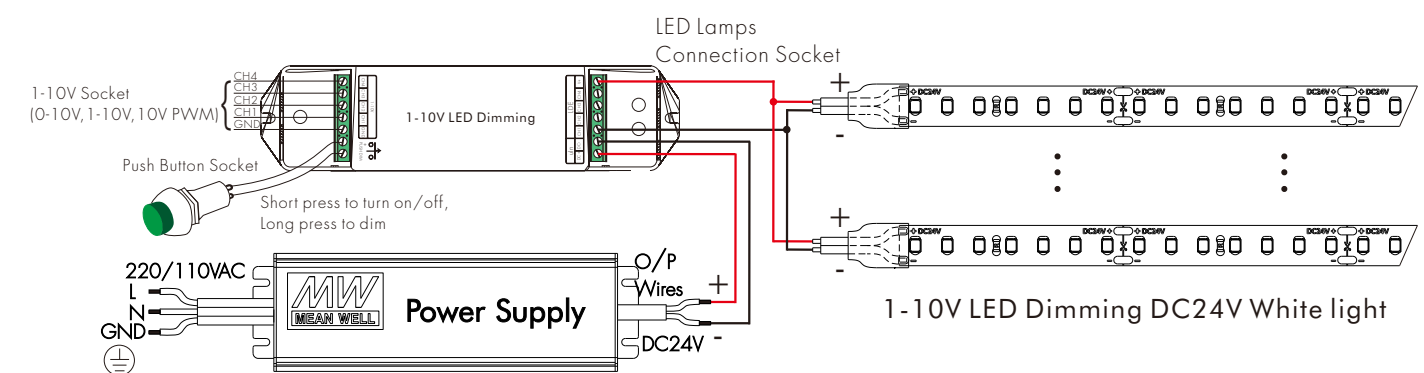

Dali Dimming system

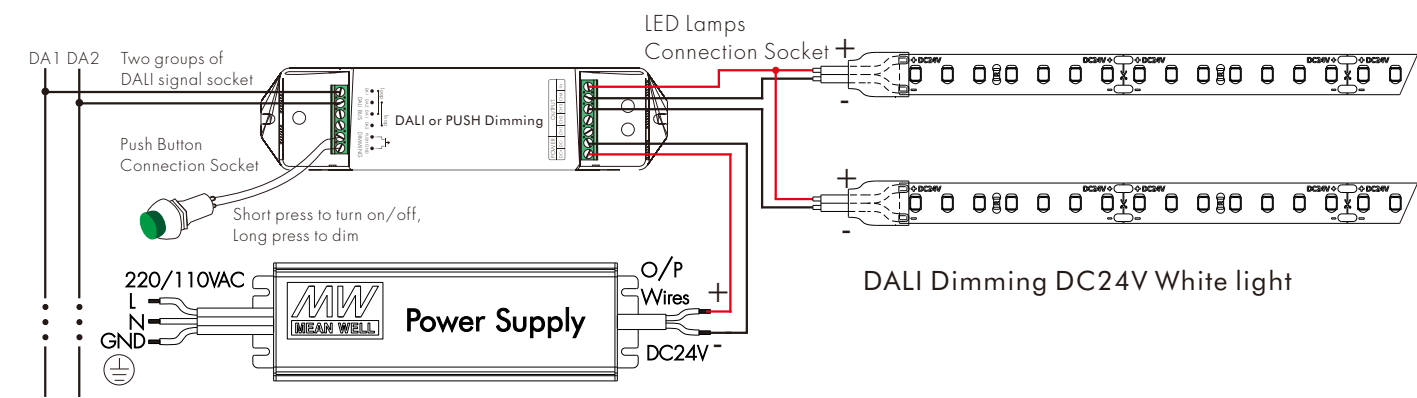

DMX Dimming system

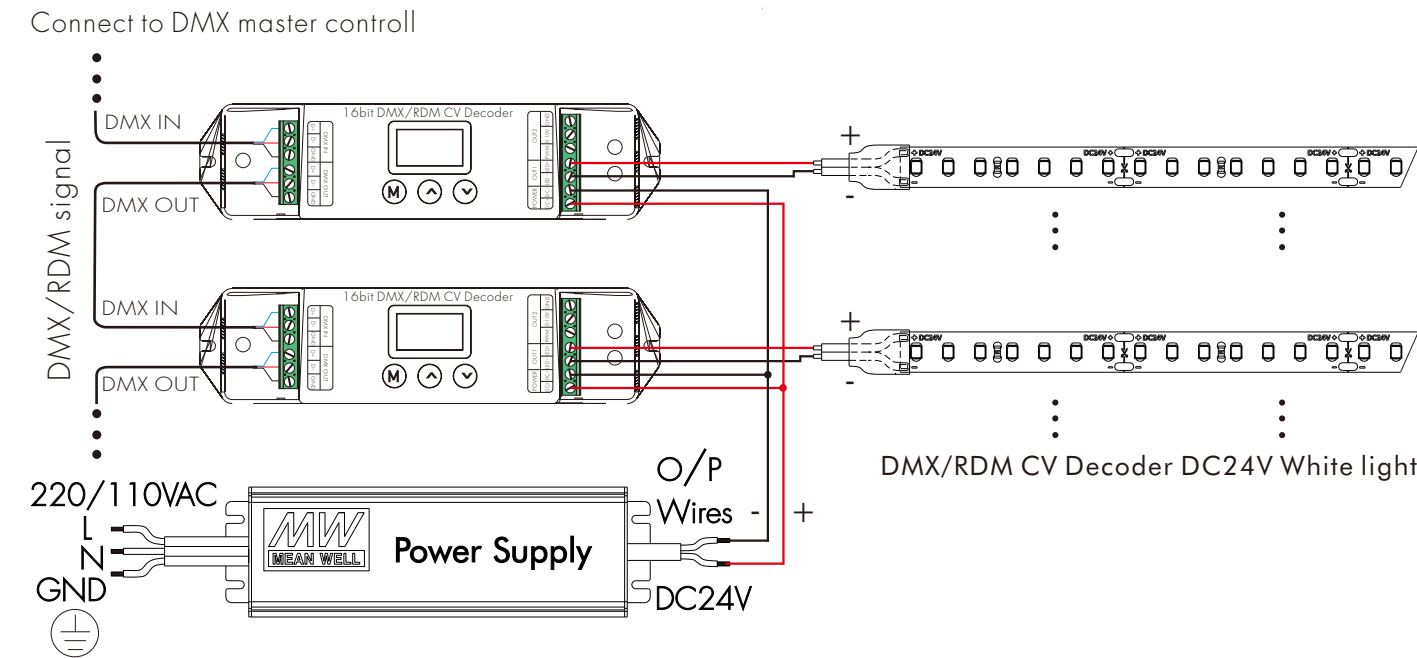

GUIDE LINE FOR DIGITAL STRIP LIGHT


SERIES	ITEM NUMBER	VOLTAGE	POWER	LED QTY	LED TYPE	CUT UNIT	WIDTH
Single Color Constant voltage	S08WXX-2835XX-012CV-120S-MY3	12V	12	120	2835	25	8
	S08WXX-2835XX-024CV-120S-MY3	24V	12	120	2835	50	8
	S10WXX-2835XX-024CV-168S-MY3	24V	16.8	168	2835	35.7	10
	S08WXX-2835XX-024CV-180S-MY3	24V	14	180	2835	33.33	8
	S10WXX-2835XX-024CV-180S-MY3	24V	18	180	2835	33.33	10
	S10WXX-2835XX-012CV-240S-MY3	12V	19.2	240	2835	12.5	10
	S10WXX-2835XX-024CV-240S-MY3	24V	19.2	240	2835	25	10
	S10WXX-5050XX-012CV-060S-MY	12V	14.4	60	5050	50	10
	S10WXX-5050XX-024CV-060S-MY	24V	14.4	60	5050	100	10
	S20WXX-5050XX-012CV-120D-MY3	12V	24	120	5050	50	20
	S20WXX-5050XX-024CV-120D-MY3	24V	24	120	5050	100	20
	S10WXX-4040XX-012CV-120S-MY3	12V	19.2	120	4040	25	10
	S10WXX-4040XX-024CV-120S-MY3	24V	19.2	120	4040	50	10
	S15WXX-2835XX-024CV-240D-MY3	24V	20	240	2835	25	15
	S20WXX-2835XX-024CV-276T-MY3	24V	24	276	2835	21.4	20
	S30WXX-2835XX-024CV-360T-MY3	24V	30	360	2835	16.6	30

2835 8MM 120LED WHITE



12V DC	8mm 2835 120LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S08WXX-283527-012CV-120S-MY3	12	12	120	1020	85	2700	80/90	25	120
	S08WXX-283530-012CV-120S-MY3	12	12	120	1080	90	3000	80/90	25	120
	S08WXX-283540-012CV-120S-MY3	12	12	120	1140	95	4000	80/90	25	120
	S08WXX-283560-012CV-120S-MY3	12	12	120	1080	90	6000	80/90	25	120


*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



24V DC	8mm 2835 120LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S08WXX-283527-012CV-120S-MY3	24	12	120	1020	85	2700	80/90	50	120
	S08WXX-283530-012CV-120S-MY3	24	12	120	1080	90	3000	80/90	50	120
	S08WXX-283540-012CV-120S-MY3	24	12	120	1140	95	4000	80/90	50	120
	S08WXX-283560-024CV-120S-MY3	24	12	120	1080	90	6000	80/90	50	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 10MM 168LED WHITE




24V DC	10mm 2835 168LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10WXX-283527-012CV-168S-MY3	24	19.2	168	1632	85	2700	80/90	35.7	120
	S10WXX-283530-012CV-168S-MY3	24	19.2	168	1728	90	3000	80/90	35.7	120
	S10WXX-283540-012CV-168S-MY3	24	19.2	168	1824	95	4000	80/90	35.7	120
	S10WXX-283560-012CV-168S-MY3	24	19.2	168	1728	90	6000	80/90	35.7	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




2835 8MM 180LED WHITE



24V DC 8mm 2835 180LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S08WXX-283527-024CV-180S-MY3	24	14	180	1020	85	2700	80/90	33.33	120	
S08WXX-283530-024CV-180S-MY3	24	14	180	1080	90	3000	80/90	33.33	120	
S08WXX-283540-024CV-180S-MY3	24	14	180	1140	95	4000	80/90	33.33	120	
S08WXX-283560-024CV-180S-MY3	24	14	180	1080	90	6000	80/90	33.33	120	



*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



24V DC 10mm 2835 180LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-283527-024CV-180S-MY3	24	18	180	1530	85	2700	80/90	33.33	120	
S10WXX-283530-024CV-180S-MY3	24	18	180	1620	90	3000	80/90	33.33	120	
S10WXX-283540-024CV-180S-MY3	24	18	180	1710	95	4000	80/90	33.33	120	
S10WXX-283560-024CV-180S-MY3	24	18	180	1620	90	6000	80/90	33.33	120	


*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 10MM 240LED WHITE

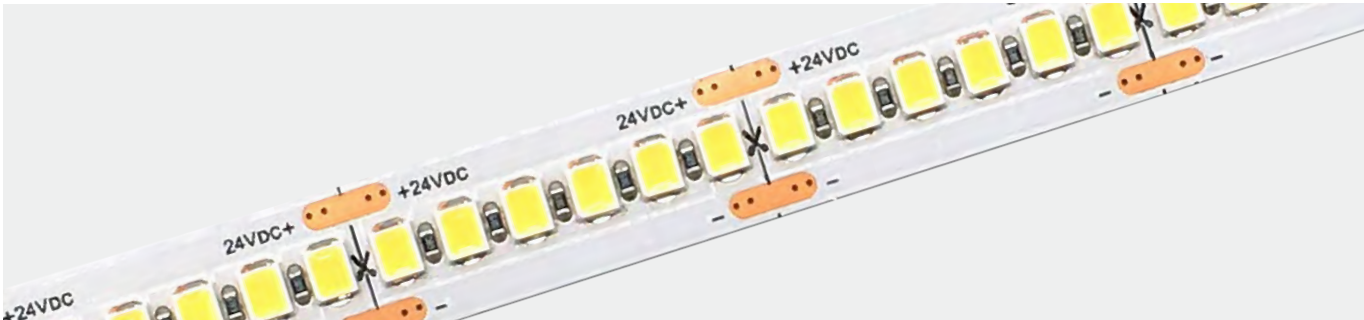

12V DC 10mm 2835 240LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-283527-012CV-240S-MY3	12	19.2	240	1632	85	2700	80/90	12.5	120	
S10WXX-283530-012CV-240S-MY3	12	19.2	240	1728	90	3000	80/90	12.5	120	
S10WXX-283540-012CV-240S-MY3	12	19.2	240	1824	95	4000	80/90	12.5	120	
S10WXX-283560-012CV-240S-MY3	12	19.2	240	1728	90	6000	80/90	12.5	120	


*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



24V DC 10mm 2835 240LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-283527-024CV-240S-MY3	24	19.2	240	1632	85	2700	80/90	25	120	
S10WXX-283530-024CV-240S-MY3	24	19.2	240	1728	90	3000	80/90	25	120	
S10WXX-283540-024CV-240S-MY3	24	19.2	240	1824	95	4000	80/90	25	120	
S10WXX-283560-024CV-240S-MY3	24	19.2	240	1728	90	6000	80/90	25	120	


*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

5050 10MM 60LED WHITE



12V DC	10mm 5050 60LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10WXX-505027-012CV-060S-MY3	12	14.4	60	1152	80	2700	80/90	50	120
	S10WXX-505030-012CV-060S-MY3	12	14.4	60	1224	85	3000	80/90	50	120
	S10WXX-505040-012CV-060S-MY3	12	14.4	60	1296	90	4000	80/90	50	120
	S10WXX-505060-024CV-060S-MY3	12	14.4	60	1224	85	6000	80/90	50	120



*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



24V DC	10mm 5050 60LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10WXX-505027-024CV-060S-MY3	24	14.4	60	1152	80	2700	80/90	100	120
	S10WXX-505030-024CV-060S-MY3	24	14.4	60	1224	85	3000	80/90	100	120
	S10WXX-505040-024CV-060S-MY3	24	14.4	60	1296	90	4000	80/90	100	120
	S10WXX-505060-024CV-060S-MY3	24	14.4	60	1224	85	6000	80/90	100	120


*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

5050 20MM 120LED WHITE

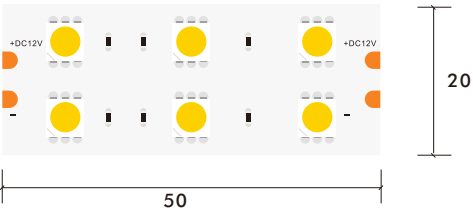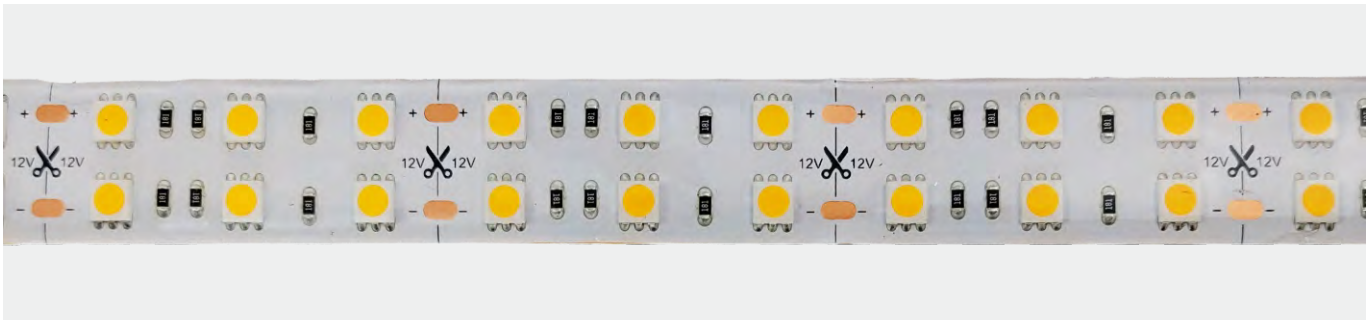

12V DC	20mm 5050 120LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S20WXX-505027-012CV-120D-MY3	12	24	120	1920	80	2700	80/90	50	120
	S20WXX-505030-012CV-120D-MY3	12	24	120	2040	85	3000	80/90	50	120
	S20WXX-505040-012CV-120D-MY3	12	24	120	2160	90	4000	80/90	50	120
	S20WXX-505060-024CV-120D-MY3	12	24	120	2040	85	6000	80/90	50	120



*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

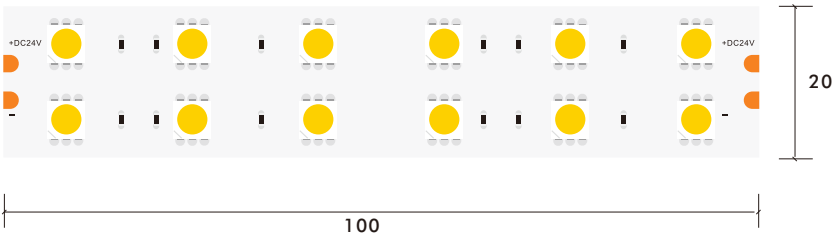

24V DC	20mm 5050 120LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S20WXX-505027-024CV-120D-MY3	24	24	120	1920	80	2700	80/90	100	120
	S20WXX-505030-024CV-120D-MY3	24	24	120	2040	85	3000	80/90	100	120
	S20WXX-505040-024CV-120D-MY3	24	24	120	2160	90	4000	80/90	100	120
	S20WXX-505060-024CV-120D-MY3	24	24	120	2040	85	6000	80/90	100	120


*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

4040 10MM 120LED WHITE

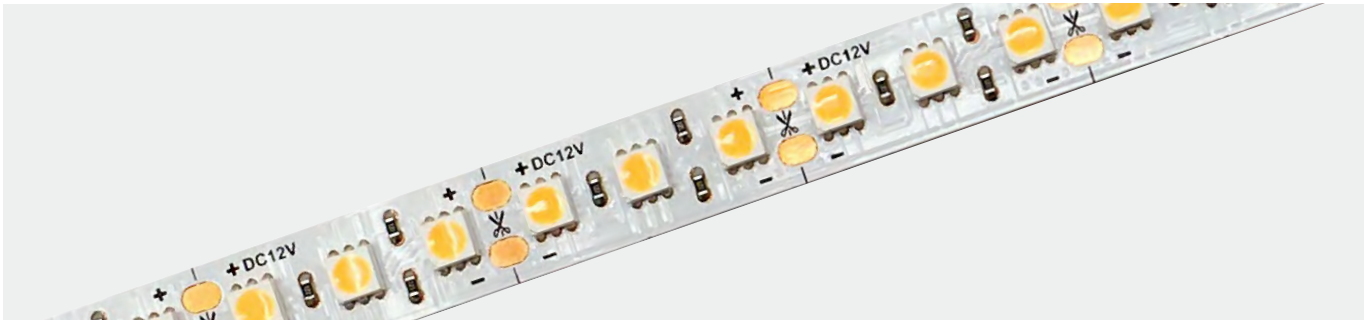

12V DC	10mm 4040 120LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10WXX-404027-012CV-120S-MY3	12	19.2	120	1630	85	2700	90	25	120
	S10WXX-404030-012CV-120S-MY3	12	19.2	120	1728	90	3000	90	25	120
	S10WXX-404040-012CV-120S-MY3	12	19.2	120	1824	95	4000	90	25	120
	S10WXX-404060-012CV-120S-MY3	12	19.2	120	1728	90	6000	90	25	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


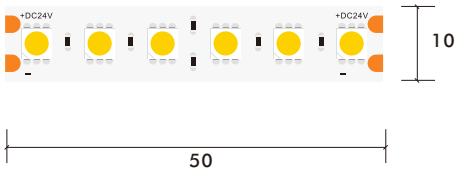


24V DC	10mm 4040 120LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S10WXX-404027-012CV-120S-MY3	24	19.2	120	1630	85	2700	90	50	120
	S10WXX-404030-012CV-120S-MY3	24	19.2	120	1728	90	3000	90	50	120
	S10WXX-404040-012CV-120S-MY3	12	19.2	120	1824	95	4000	90	50	120
	S10WXX-404060-024CV-120S-MY3	12	19.2	120	1728	90	6000	90	50	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


2835 15MM 240LED WHITE

NEW


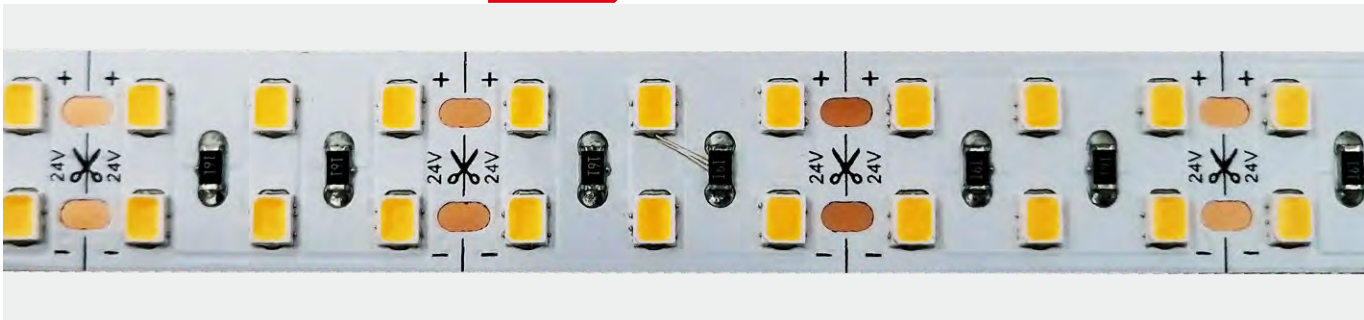


24V DC	15mm 2835 240LED Single Color LED Strip									
	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
	S15WXX-283527-024CV-240D-MY3	24	20	240	1600	80	2700	80/90	25	120
	S15WXX-283530-024CV-240D-MY3	24	20	240	1700	85	3000	80/90	25	120
	S15WXX-283540-024CV-240D-MY3	24	20	240	1800	90	4000	80/90	25	120
	S15WXX-283560-024CV-240D-MY3	24	20	240	1700	85	6000	80/90	25	120

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

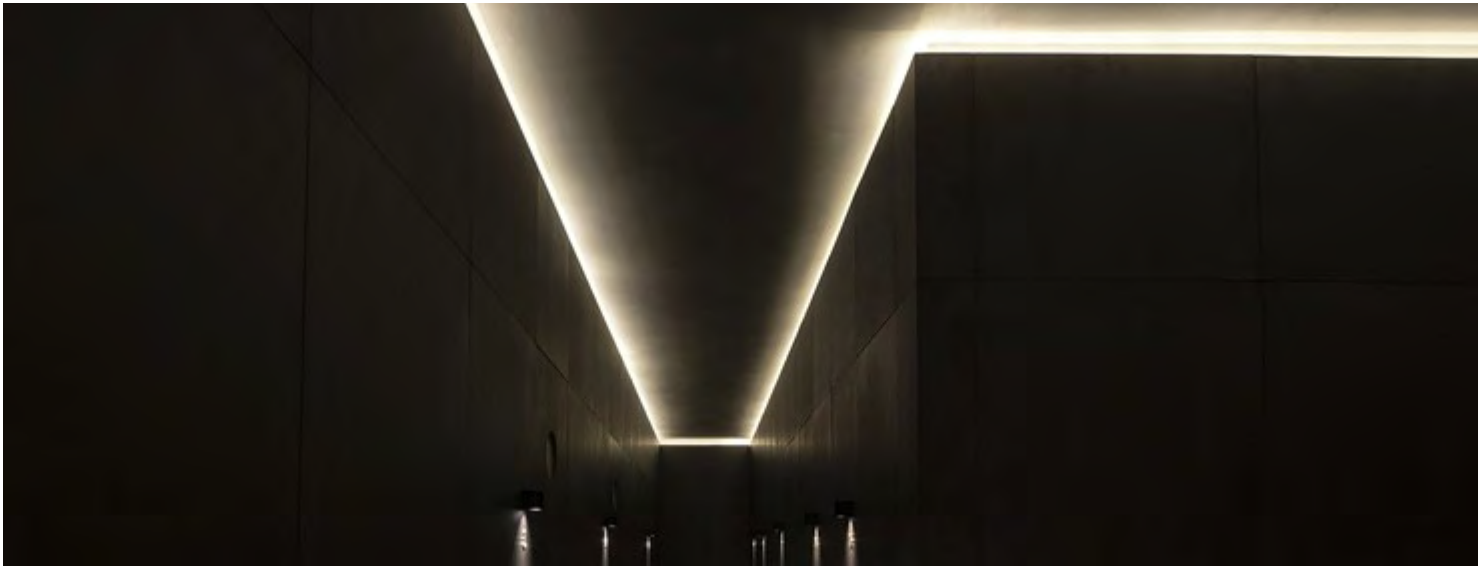



2835 20MM 276 LED WHITE NEW

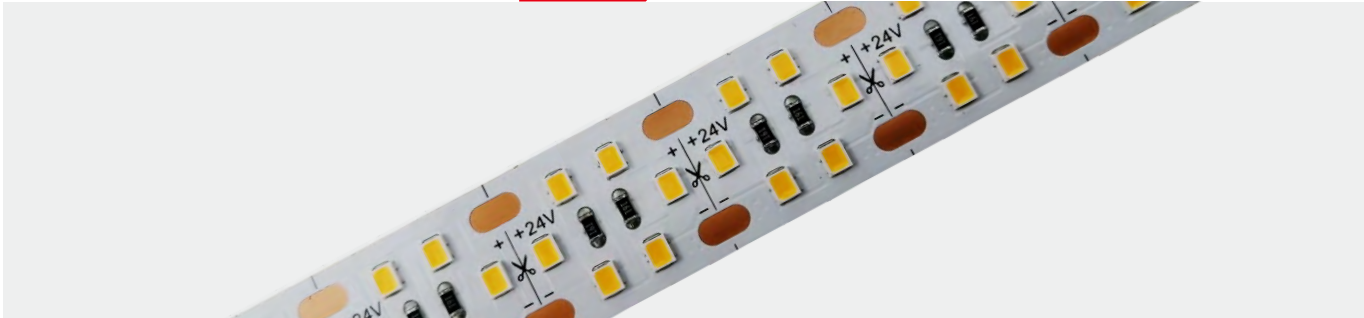

24V DC 20mm 2835 276LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S20WXX-283527-024CV-276T-MY3	24	24	276	2040	85	2700	80/90	21.4	120	
S20WXX-283530-024CV-276T-MY3	24	24	276	2160	90	3000	80/90	21.4	120	
S20WXX-283540-024CV-276T-MY3	24	24	276	2280	95	4000	80/90	21.4	120	
S20WXX-283560-024CV-276T-MY3	24	24	276	2160	90	6000	80/90	21.4	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 30MM 360LED WHITE NEW

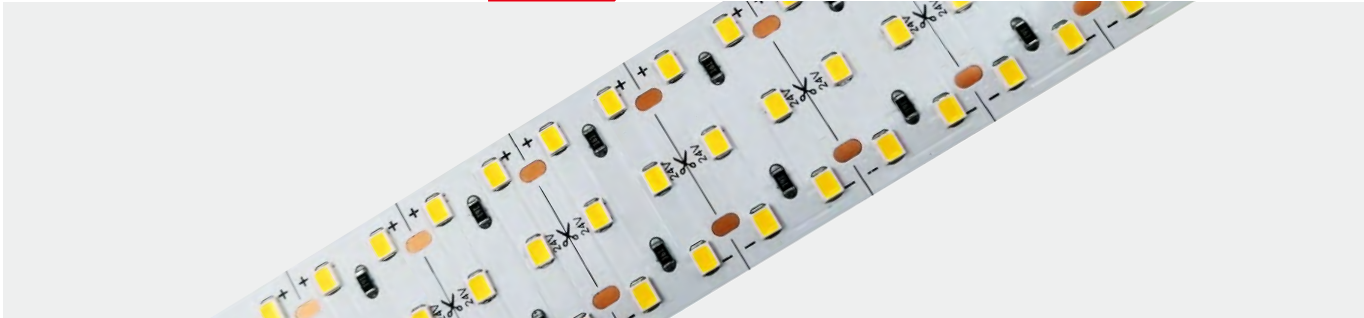

12V DC 20mm 5050 120LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S30WXX-283527-024CV-360T-MY3	24	30	360	2400	80	2700	80/90	16.6	120	
S30WXX-283530-024CV-360T-MY3	24	30	360	2415	85	3000	80/90	16.6	120	
S30WXX-283540-024CV-360T-MY3	24	20	360	2700	90	4000	80/90	16.6	120	
S30WXX-283560-024CV-360T-MY3	24	30	360	2415	85	6000	80/90	16.6	120	

*The strip light will come with 5 meter /reel
*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



POWER SUPPLY



LRS SERIES POWER SUPPLY

MEANWELL LRS NON WATERPROOF LED POWER SUPPLY



LRS	Meanwell LRS non waterproof LED power supply							
	Model Number	Input Voltage (ac v)	Input Current (A)	Power (W)	Output Voltage (dv v)	Related Current (A)	Dimensions (mm)	Package Qty (pcs)
	LRS-35-12	85-264	0.42	35	12	3.0	99*82*30	60
	LRS-35-24	85-264	0.42	35	24	1.5	99*82*30	60
	LRS-50-12	85-264	0.56	50	12	4.2	99*82*30	60
	LRS-50-24	85-264	0.56	50	24	2.2	99*82*30	60
	LRS-75-12	85-264	0.85	75	12	6.0	99*97*30	45
	LRS-75-24	85-264	0.85	75	24	3.2	99*97*30	45
	LRS-100-12	85-264	1.20	100	12	8.5	129*97*30	40
	LRS-100-24	85-264	1.20	100	24	4.5	129*97*30	40
	LRS-150-12	85-264	1.70	150	12	12.5	159*97*30	30
	LRS-150-24	85-264	1.70	150	24	6.5	159*97*30	30
	LRS-200-12	85-264	2.20	200	12	17.0	215*115*30	15
	LRS-200-24	85-264	2.20	200	24	8.8	215*115*30	15
	LRS-350-12	85-264	3.40	350	12	29.0	215*115*30	15
	LRS-350-24	85-264	3.40	350	24	14.6	215*115*30	15
	LRS-450-12	85-264	6.0	450	12	37.5	225*124*35	15
	LRS-450-24	85-264	6.0	450	24	18.8	225*124*35	15
	LRS-600-12	85-264	7.5	600	12	50	225*124*41	12
	LRS-600-24	85-264	7.5	600	24	25	225*124*41	12

MEANWELL LPV WATERPROOF LED POWER SUPPLY



LPV Meanwell LPV non waterproof LED power supply							
Model Number	Input Voltage (ac v)	Input Current (A)	Power (W)	Output Voltage (dv v)	Related Current (A)	Dimensions (mm)	Package Qty (pcs)
LPH-18-12	180-264	0.30	18	12	1.5	140*30*22	70
LPH-18-24	180-264	0.30	18	24	0.75	140*30*22	70
LPV-20-12	90-264	0.35	20	12	1.67	118*35*26	60
LPV-20-24	90-264	0.35	20	24	0.84	118*35*26	60
LPV-35-12	90-264	0.70	35	12	3.0	148*40*30	40
LPV-35-24	90-264	0.70	35	24	1.5	148*40*30	40
LPV-60-12	90-264	1.0	60	12	5.0	162.5*42.5*32	32
LPV-60-24	90-264	1.0	60	24	2.5	162.5*42.5*32	32
LPV-100-12	90-264	1.20	100	12	8.5	190*52*37	20
LPV-100-24	90-264	1.20	100	24	4.2	190*52*37	20
LPV-150-12	90-264	1.7	150	12	10.0	191*63*37.5	20
LPV-150-24	90-264	1.7	150	24	6.3	191*63*37.5	20

MEANWELL ELG NON WATERPROOF LED POWER SUPPLY



ELG Meanwell ELG waterproof LED power supply							
Model Number	Input Voltage (ac v)	Input Current (A)	Power (W)	Output Voltage (dv v)	Related Current (A)	Dimensions (mm)	Package Qty (pcs)
ELG-75-12A	100-305	0.45	75	12	5.0	180*63*35.5	16
ELG-75-24A	100-305	0.45	75	24	3.15	180*63*35.5	16
ELG-100-24A	100-305	0.60	100	24	4.0	199*63*35.5	16
ELG-150-12A	100-305	0.90	150	12	10.0	219*63*35.5	16
ELG-150-24A	100-305	0.90	150	24	6.25	219*63*35.5	16
ELG-200-12A	100-305	1.20	200	12	16.0	244*71*37.5	12
ELG-200-24A	100-305	1.20	200	24	8.4	244*71*37.5	12
ELG-240-24A	100-305	1.50	240	24	10	244*71*37.5	12
ELG-300-12A	100-305	1.60	300	12	22.0	246*77*39.5	9
ELG-300-24A	100-305	1.60	300	24	12.5	246*77*39.5	9

MEANWELL HLG WATERPROOF LED POWER SUPPLY



HLG	Meanwell HLG waterproof LED power supply							
	Model Number	Input Voltage (ac v)	Input Current (A)	Power (W)	Output Voltage (dv v)	Related Current (A)	Dimensions (mm)	Package Qty (pcs)
	HLG-40H-12A	90-305	0.24	40	12	3.33	171*61.5*36.8	20
	HLG-40H-24A	90-305	0.24	40	24	1.67	171*61.5*36.8	20
	HLG-60H-24A	90-305	0.32	60	24	2.5	171*61.5*36.8	20
	HLG-80H-12A	90-305	0.425	80	12	5.0	195.6*61.5*38.8	16
	HLG-80H-24A	90-305	0.425	80	24	3.4	195.6*61.5*38.8	16
	HLG-100H-24A	90-305	0.55	100	24	4.0	220*68.8*38.8	12
	HLG-120H-12A	90-305	0.6	120	12	10.0	220*68.8*38.8	12
	HLG-120H-24A	90-305	0.6	120	24	5.0	220*68.8*38.8	12
	HLG-150H-12A	90-305	0.75	150	12	12.5	228*68.8*38.8	12
	HLG-150H-24A	90-305	0.75	150	24	6.3	228*68.8*38.8	12
	HLG-185H-12A	90-305	0.9	185	12	13.0	228*68.8*38.8	12
	HLG-185H-24A	90-305	0.9	185	24	7.8	228*68.8*38.8	12
	HLG-240H-12A	90-305	2.0	240	12	16.0	244*68.8*38.8	12
	HLG-240H-24A	90-305	2.0	240	24	10.0	244*68.8*38.8	12
	HLG-320H-12A	90-305	1.65	320	12	22.0	252*90*43.8	9
	HLG-320H-24A	90-305	1.65	320	24	13.34	252*90*43.8	9
	HLG-480H-24A	90-305	2.45	480	24	20.0	262*125*43.8	4
	HLG-600H-12A	90-305	3.3	600	12	40.0	280*144*48.5	4
	HLG-600H-24A	90-305	3.3	600	24	25.0	280*144*48.5	4

MEANWELL XLG NON WATERPROOF LED POWER SUPPLY




XLG	Meanwell XLG waterproof LED power supply							
	Model Number	Input Voltage (ac v)	Input Current (A)	Power (W)	Output Voltage (dv v)	Related Current (A)	Dimensions (mm)	Package Qty (pcs)
	XLG-75-12	100-305	0.45	75	12	5.0	140*63*32	24
	XLG-75-24	100-305	0.45	75	24	3.1	140*63*32	24
	XLG-100-12	100-305	0.5	100	12	8.0	140*63*32	24
	XLG-100-24	100-305	0.5	100	24	4.0	140*63*32	24
	XLG-150-12	100-305	1.00	150	12	12.5	180*63*35.5	16
	XLG-150-24	100-305	1.00	150	24	6.25	180*63*35.5	16
	XLG-200-12	100-305	1.10	200	12	16	199*63*35.5	16
	XLG-200-24	100-305	1.10	200	24	8.3	199*63*35.5	16

CONTROLLER



DC VOLTAGE CONTROLLER

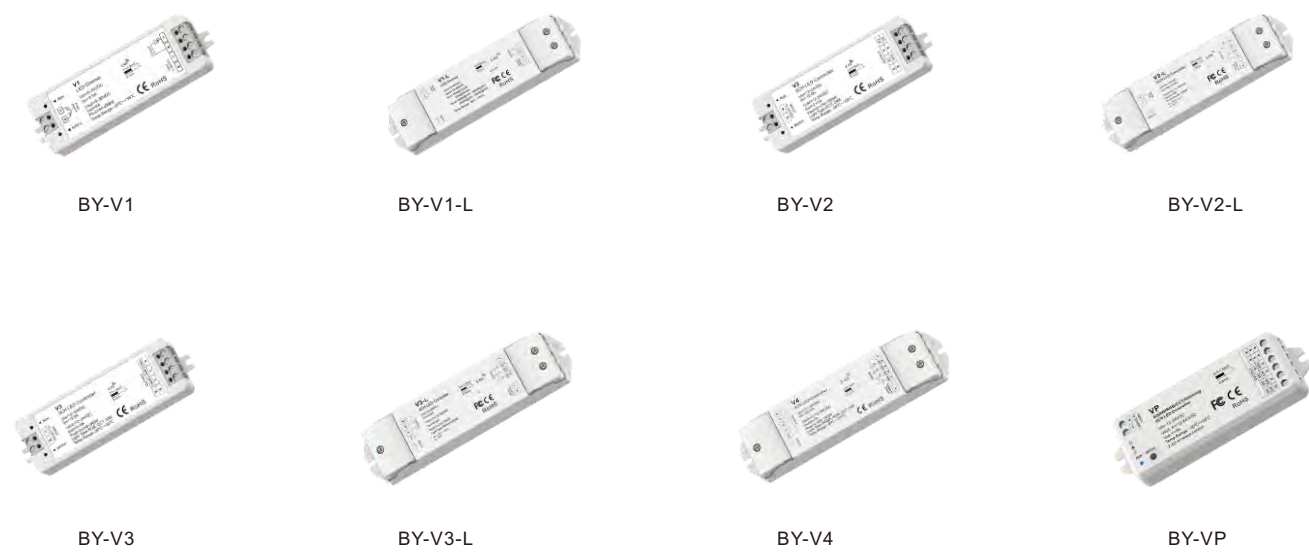

CONSTANT VOLTAGE RF LED CONTROLLER					
Model Number	Input Voltage (dc v)	Ch Qty (PC)	Output Current (A)	Output Power (W)	Dimension (mm)
BY-V1	5-36V	1CH	≤8A	5V<40W,12V<96,24V<192W, 36V<288W	97*33*18
BY-V1-L	12-24V	1CH	≤15A	12V<180W,24V<360W	175*45*27
BY-V2	12-24V	1CH	≤5A	12V<120W,24V<240W	97*33*18
BY-V2-L	12-36V	2CH	≤8A/CH	12V<192V,24V<384W, 36V<576W	170*50*23
BY-V3	12-24V	3CH	≤4A/CH	12V<144W,24V<288W	97*33*18
BY-V3-L	12-36V	3CH	≤6A/CH	12V<216W,24V<432,36V<648W	97*33*18
BY-V4	12-36V	4CH	≤5A/CH	12V<240V,24V<480W, 36V<720W	97*33*18
BY-VP	12-24V	4CH	≤4A/CH	12V<192W,24V<384W	114*38*20

FOR REMOTE FOR DC VOLTAGE RF REMOTE



RF REMOTE						
Model Number	Zone	Working Voltage (V)	Working Current (mA)	Standby Current (uA)	Standby Time (Year)	Dimension (mm)
BY-RT1	1 Zone DIM	3V DC(AAA*2)	<5mA	<10uA	1 Years	122*53*17.5
BY-RT6	4 Zone DIM	3V DC(AAA*2)	<5mA	<10uA	1 Years	122*53*17.5
BY-RT8	8 Zone DIM	3V DC(AAA*2)	<5mA	<10uA	1 Years	122*53*17.5
BY-RT2	1 Zone CCT	3V DC(AAA*2)	<5mA	<10uA	1 Years	22*53*17.5
BY-RT7	4 Zone CCT	3V DC(AAA*2)	<5mA	<10uA	1 Years	22*53*17.5
BY-RT8C	8 Zone CCT	3V DC(AAA*2)	<5mA	<10uA	1 Years	22*53*17.5
BY-RT4	1 Zone RGB/RGBW	3V DC(AAA*2)	<5mA	<10uA	1 Years	22*53*17.5
BY-RT9	4 Zone RGB/RGBW	3V DC(AAA*2)	<5mA	<10uA	1 Years	22*53*17.5



AC VOLTAGE CONTROLLER



BY-S3 BY-S3(WT) BY-S1-HV BY-S4

AC VOLTAGE CONTROLLER					
Model Number	Input Voltage (dc v)	Ch Qty (PC)	Output Current (A)	Output Power (W)	Dimension (mm)
BY-S3	100-240VAC	3CH	1A/CH	3*(100-240)W	178*150*38
BY-S3(WT)	100-240VAC	3CH	1A/CH	3*(100-240)W	178*150*38
BY-S1-HV	100-240VAC	N / A	≤1.5A	1.5*(100-240)W	56*56*35
BY-S4	100-240VAC	4CH	1A/CH	4*(100-240)W	163*46*25



*BY-RS4 only for BY-S4

BY-RS4

AC VOLTAGE RGBW LED STRIP CONTROLLER BY-RS4 FOR BY S4						
Model Number	Zone	Working Voltage (V)	Working Current (mA)	Standby Current (uA)	Standy Time (Year)	Dimension (mm)
BY-RS4	4 Zone RGB/RGBW	3V DC(AAA*2)	<8A	<5uA	1year	97*33*18

DIGITAL CONTROLLER



BY-SP108E BY-SP801E BY-SP659E

DIGITAL CONTROLLER				
Model Number	Working Voltage (V)	Supported Pixel Qty (PC)	Programmable	Dimension (mm)
BY-SP108E	5-24V DC	2048	Built-In	85*45*22
BY-SP801E	5-24V DC	4096	Program by APP	80*41*20
BY-SP659E	5-24V DC	4096	Program by APP	78*56*20



BY-K1000C BY-K4000C BY-K8000C BY-S8000L
*For DMX console

PROGRAMMABLE DIGITAL CONTROLLER				
Model Number	Working Voltage (V)	Supported Pixel Qty (PC)	Programmable	Dimension (mm)
BY-K1000C	5-24V DC	1024	Program by software	159*89*24
BY-K4000C	5-24V DC	4096	Program by software	215*146*30
BY-K8000C	5-24V DC	8192	Program by software	180*120*30
BY-S8000L	5-24V DC	8192	Program by software	292*170*50



BY-XB809 BY-T790
*Master controller *Sub controller

MASTER CONTROLLER AND SUB CONTROLLER				
Model Number	Working Voltage (V)	Supported Pixel Qty (PC)	Type	Dimension (mm)
BYXB809 (MASTER)	110-240 AC	N / A	Master	260*160*52
BY-T790 (SUB)	5-24V DC	8192	Sub	310*152*42