

## 2026 LED STRIP LIGHT CATALOGUE

### Shenzhen Bylen Tech Co.,LTD

Tel: 0086 0755 23000864  
Fax:0086 0755 23000864  
Web:www.bylentech.com  
Email:info@bylentech.com

Office Address:  
5F, Block 16, Zhongpenchen Industrial Park,Zhenxin Road,Matian Street,Guangming  
District,Shenzhen,China,518106

Factory Address:  
3F, Block 3B, NO13 Tianxin Road, XinTian Villiage,Huangjiang Street,Dongguan, Guangdong.

Since 2010

**InBylen**®

Making your bright Future

**Over 13 year experience in LED lighting**

## Company Profile



Bylen Tech, established in 2010 in Shenzhen, is a high-tech enterprise specializing in the design, research, manufacturing, and marketing of LED linear lighting. With over 15 years of industry experience, we have become a trusted provider of high-quality linear lighting solutions.

Our product portfolio includes SMD strip lights, COB strip lights, SPI and DMX512 strip lights, and neon flex. We offer comprehensive solutions for a wide range of LED lighting projects. All our products comply with international standards such as CE, RoHS, UL, ETL, BIS, PSE, SASO, and FCC. We have successfully supported customers in more than 60 countries with their lighting projects.

Our factory, located in Dongguan, covers more than 4,000 square meters and employs up to 140 workers during peak production periods. Certified by ISO 9001, we take pride in our strong R&D and design capabilities, enabling us to provide customized and flexible solutions tailored to our clients' diverse needs.

Bylen Tech is committed to quality, innovation, and customer satisfaction. We welcome partnerships with LED linear light wholesalers and distributors worldwide.

### **Mission**

To light up lives, enhance environments, and create beauty through innovative illumination.

### **Vision**

We strive to become the most recognized and preferred smart lighting brand

### **Values**

Deliver enduring value for our customers

Enable employee growth and prosperity through meaningful work


Trust Respect Openness Innovation Teamwork Responsibility

Embrace rigorous self-reflection


Commit to long-term thinking

# Certificates

# Factory Photo

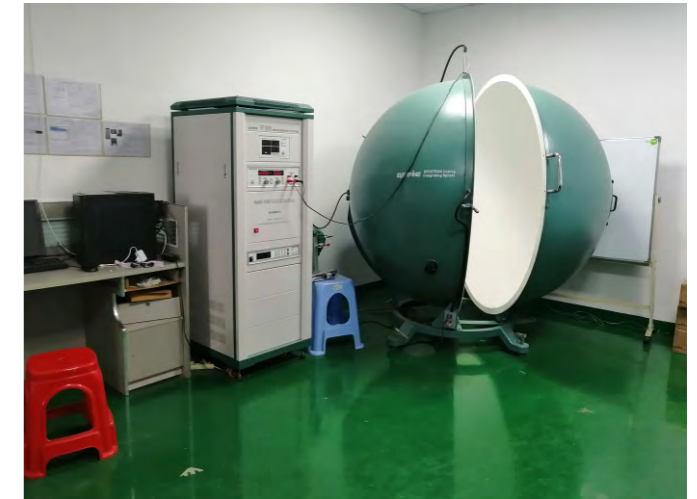


# LED Strip Light

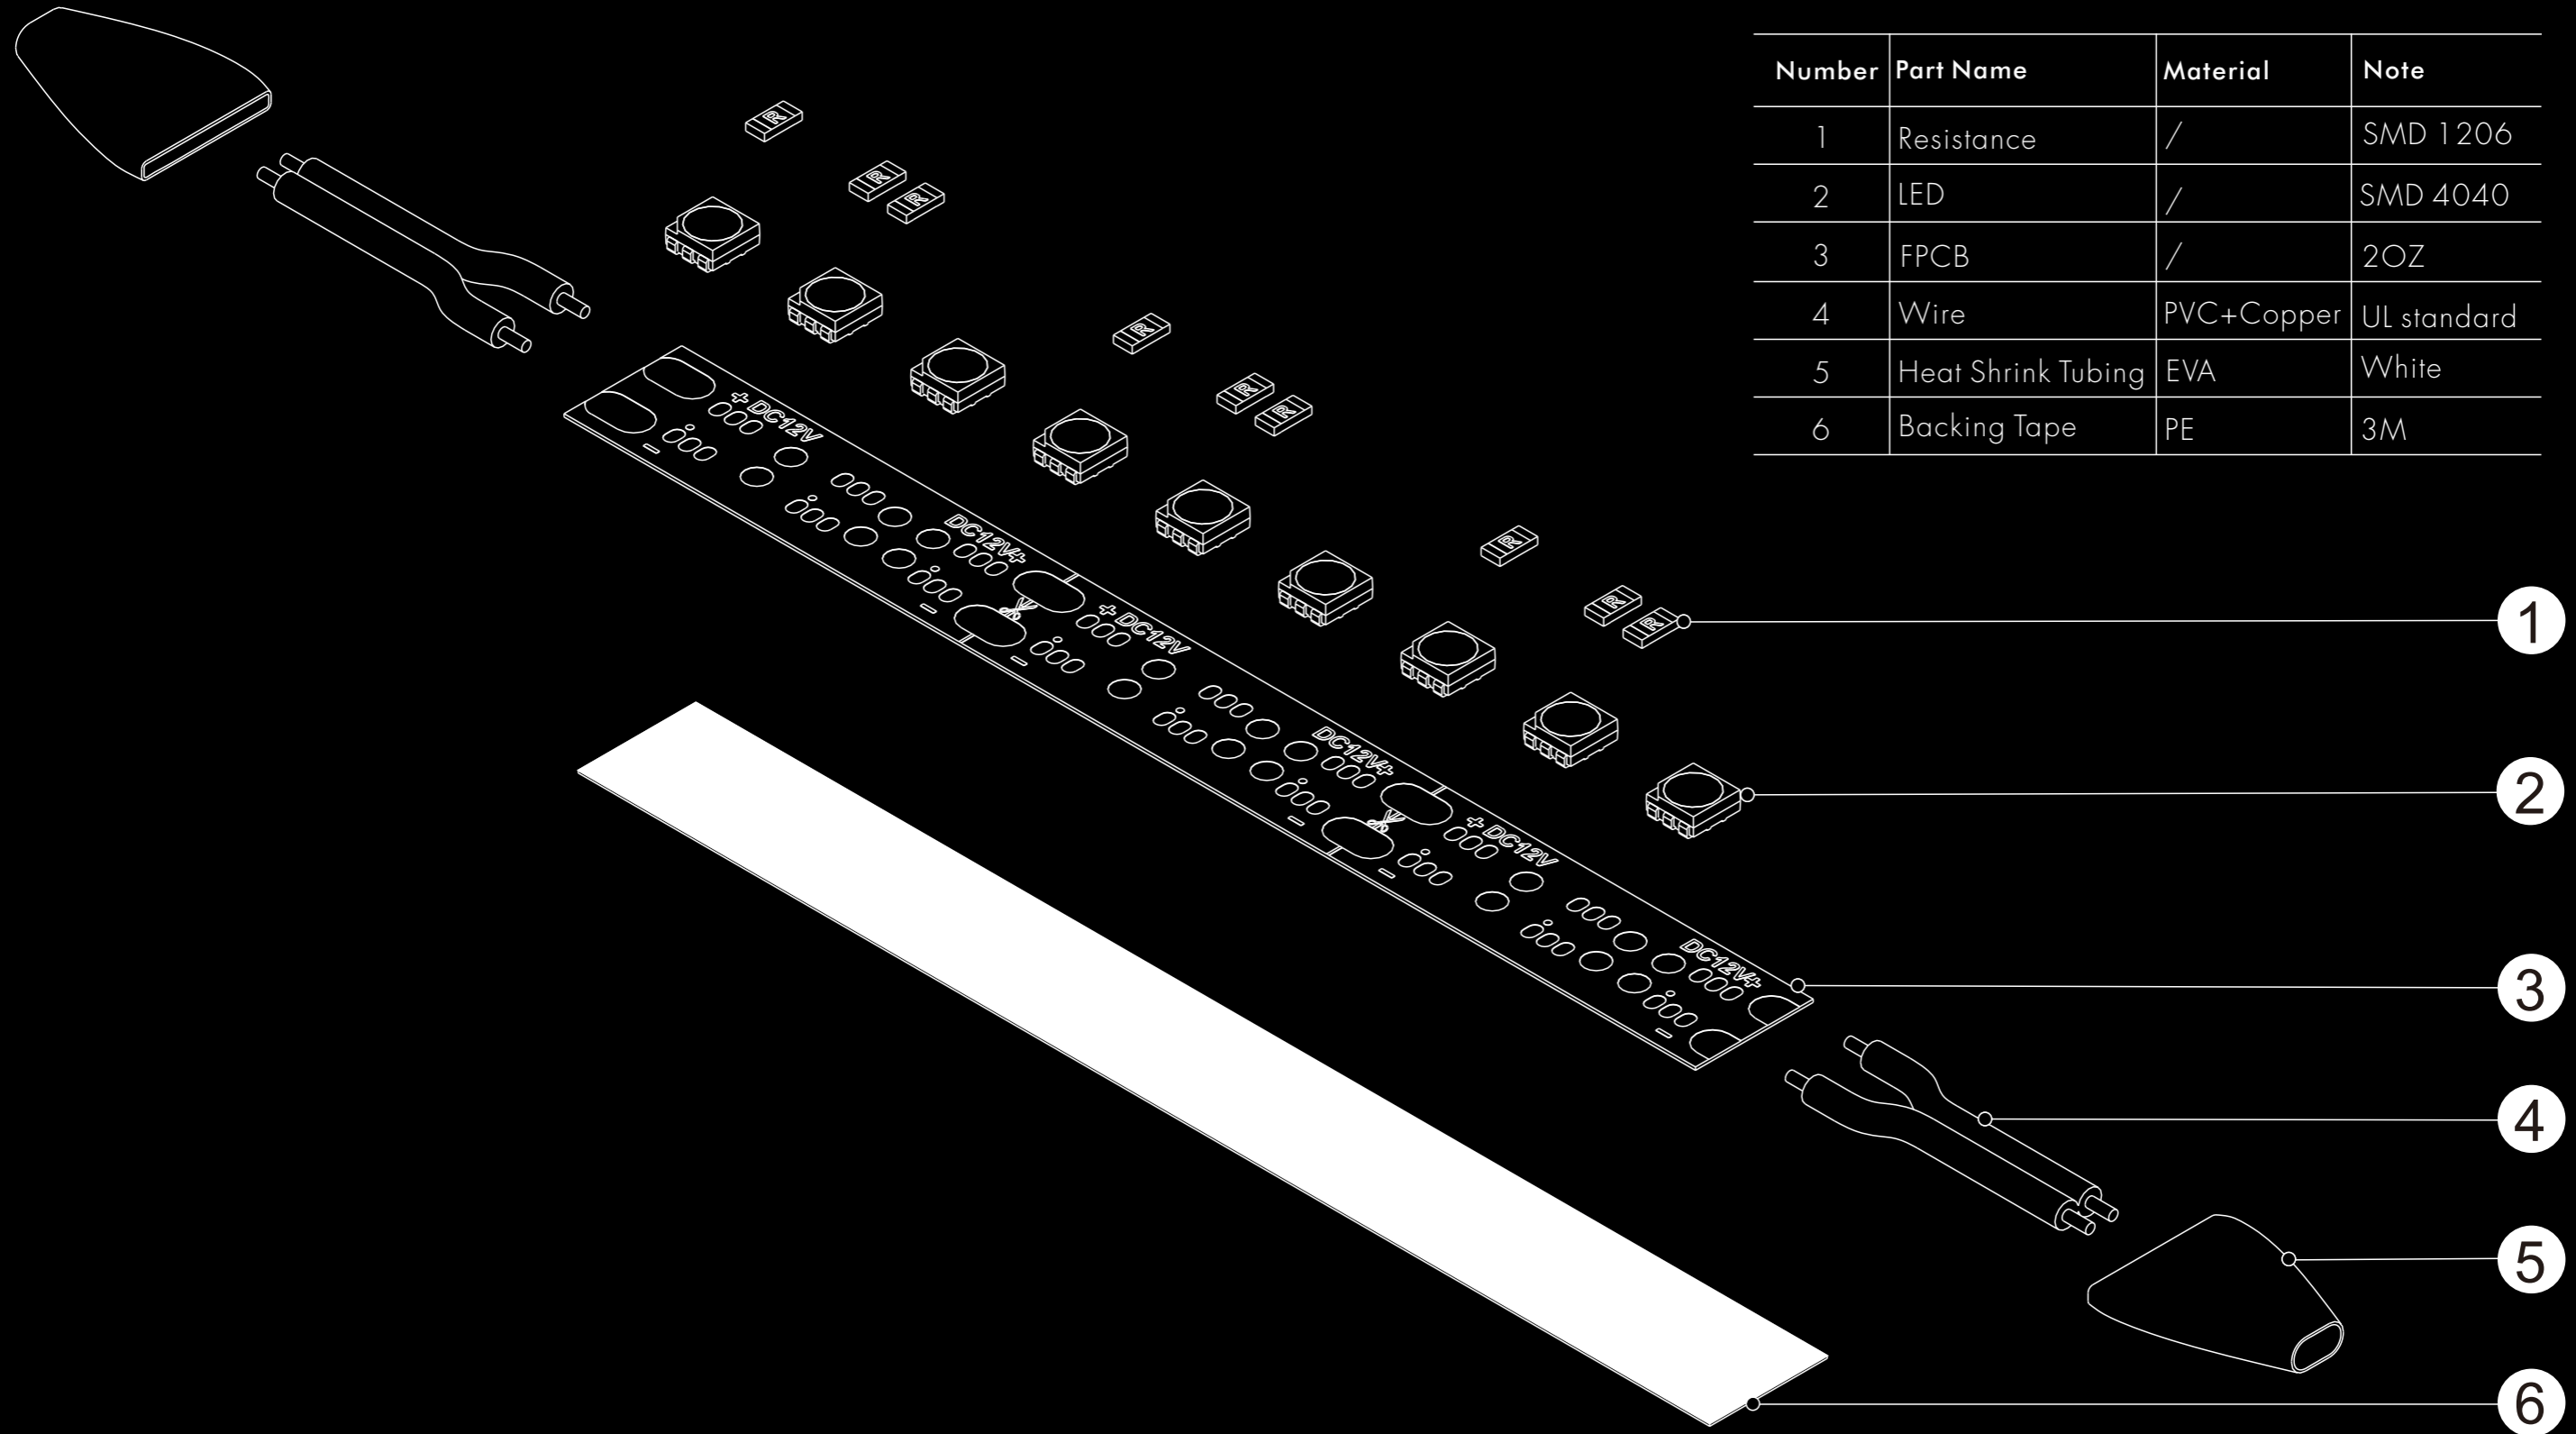


Number	Part Name	Material	Note
1	Resistance	/	SMD 1206
2	LED	/	SMD 4040
3	FPCB	/	20Z
4	Wire	PVC+Copper	UL standard
5	Heat Shrink Tubing	EVA	White
6	Backing Tape	PE	3M

# Macadam 3 Step Flexible strip light

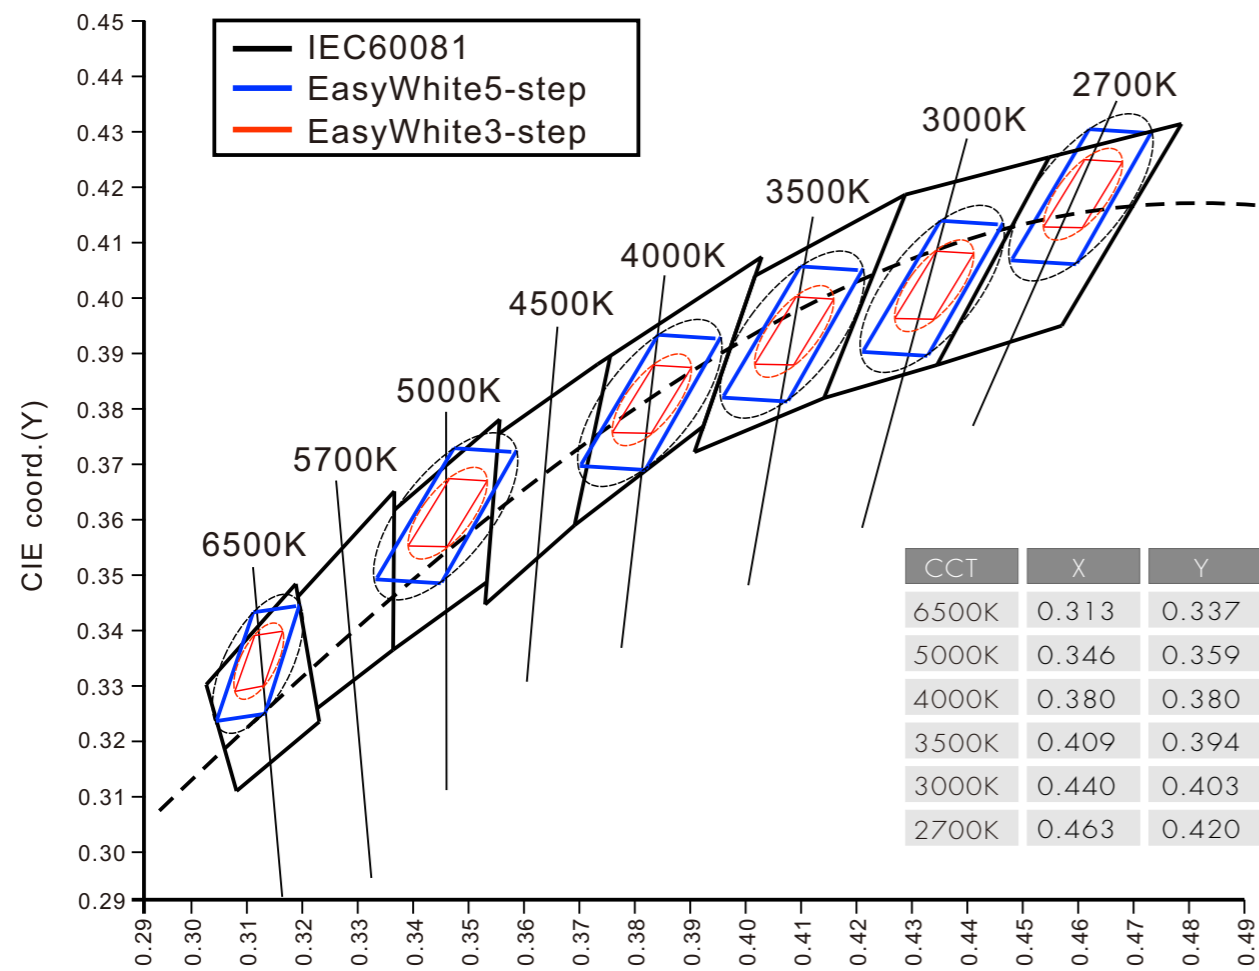

## DUV

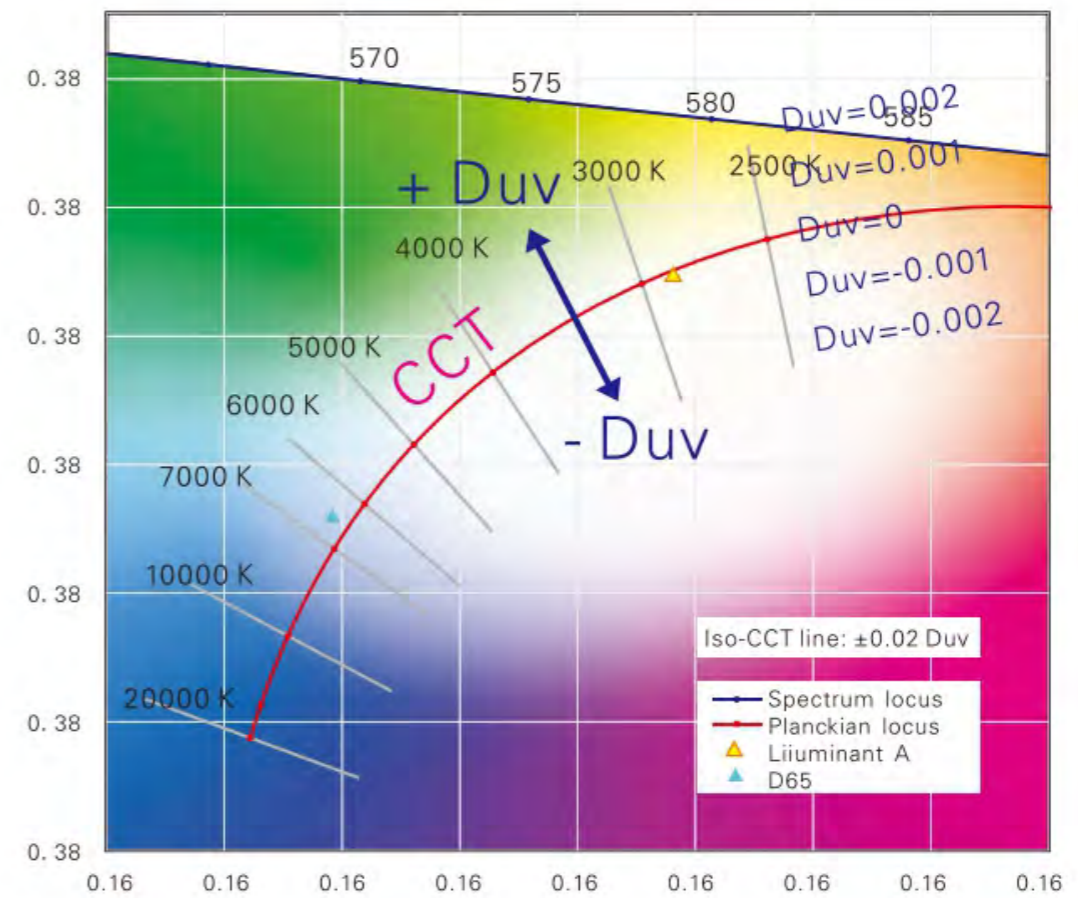

We understand it as judging color differences by specific number. The DUV number more close to zero means idea color reality.

Customer-specific 9in management  
 Always the same Bin for different batches  
 One Bin, SDCM ≤ 3 Step, No visual difference forever

**1**  
**BIN**  
**ONLY**

**3**  
**Step**  
**SDCM**

**VIP**  
**Same**  
**Forever**


## Color Rendering Performance

CRI is an acronym for Color Rendering Index, and is the world's most widely accepted metric to describe a light source's ability to accurately reproduce color. The general concept involves using a set of 15 predefined colors called test color samples (TCS) and determining how accurate a light source would make each of these colors appear.

Below are the 15 test color samples reproduced:



The general color rendering index (Ra) is the average value of the special color rendering index of the 8 colors in the number 1-8 of the light source (that is, the average value of R1-R8). Usually, we use this value to characterize the color rendering of the light source. The more Ra Larger, the better the color rendering of the light source

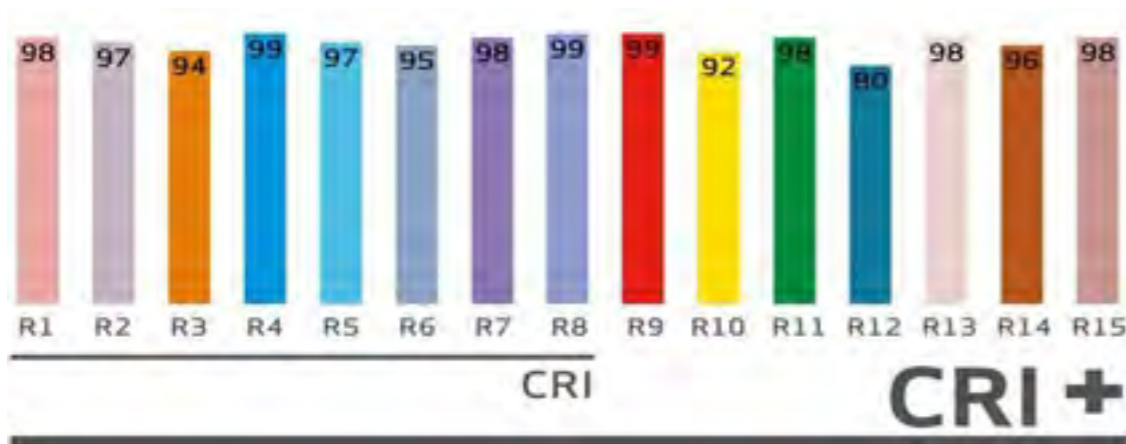

Ra70



Ra80



Ra90

## The Color Temperature

The color temperature of a light source is the temperature of an ideal black-body radiator that radiates light of a color comparable to that of the light source. Color temperature is a characteristic of visible light that has important applications in lighting, photography, videography, publishing, manufacturing, astrophysics, horticulture, and other fields. In practice, color temperature is meaningful only for light sources that do in fact correspond somewhat closely to the color of some black body, i.e., light in a range going from red to orange to yellow to white to blueish white; it does not make sense to speak of the color temperature of, e.g., a green or a purple light. Color temperature is conventionally expressed in kelvins, using the symbol K, a unit of measure for absolute temperature.




2000K 2400K 2700K 2850K 3000K 3200K 3300K 3500K 3800K 4000K 4200K 4400K 5000K 6500K




Color Temperature	2700K	4000K	6000K
Light Appearance	Warm white	Natural white	Day light
Ambience	Cozy inviting	Welcoming	Crisp invigorating
Best for	Living room, Kitchens	Bathrooms outdoor	Basements
	Table/floor, pendants	Vanities overhead lighting	Task lighting


## Waterproof




*Naked strip*  
Applicable to dry environment

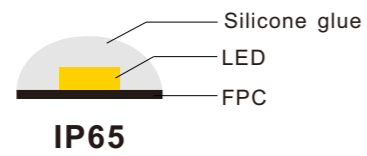

*Gel coating*  
Applicable to damp environment

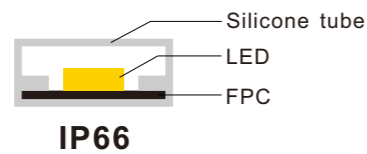

*Silicone tube*  
Applicable to water environment

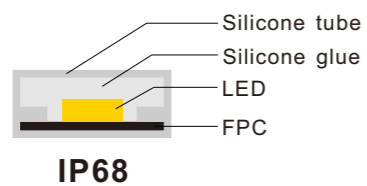

*Silicone filling*  
Under water (with short time)

## Backing Tape Selection

3M 200MP



Normal Indoor use

Adhesive Thickness  
mils (mm) 5.2mils  
(0.13 mm) Adhesion to  
Stainless Steel 7.0N/CM

3M 300MP



Normal Indoor use

Adhesive Thickness  
mils (mm) 4.8mils  
(0.12 mm) Adhesion to  
Stainless Steel 8.6N/CM

3M 9080 Tape



Normal Indoor use

Adhesive Thickness  
mils (mm) 12.8mils  
(0.32 mm) Adhesion to  
Stainless Steel 7.5N/CM

3M 4229 Tape



For Waterproof Strips

Adhesive Thickness  
mils (mm) 30.4mils  
(0.76 mm) Adhesion to  
Stainless Steel 20.0N/CM

Tesa 4965



For Aluminum Profile

Adhesive Thickness  
mils (mm) 8.2mils  
(0.205 mm) Adhesion to  
Stainless Steel 14.0N/CM

Blue Tape




For High Wattage Strips

Adhesive Thickness  
mils (mm) 4.0mils  
(0.10mm) Adhesion to  
Stainless Steel 6.0N/CM



## Order Information

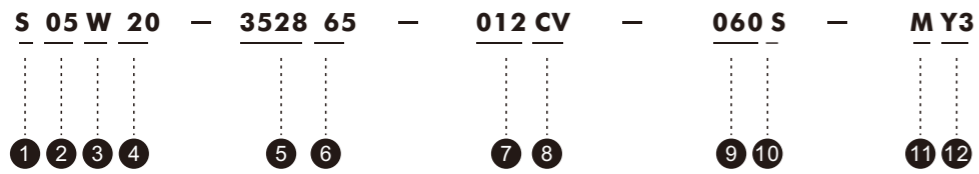

1	PRODUCT NAME	2	PCB WIDTH	3	PCB COLOR
S	STRIP LIGHT	04	4MM	W	WHITE
N	NEON FLEX	05	5MM	B	BLACK
L	LINEAR LIGHT	08	8MM		
		10	10MM		
		12	12MM		
		20	20MM		
4	IP RATING	5	LED TYPE	6	COLOR TEMP
20	NON WATERPROOF	2835	2835SMD	30	3000K
65	IP65	5050	5050SMD	TW	CCT COLOR
66	IP66	2216	2216SMD	TC	RGB COLOR
67	IP67	3014	3014SMD	MC	RGBW COLOR
68	IP68	3838	3838SMD	FC	RGB CCT COLOR
		FCOB	FCOB TYPE		
7	VOLTAGE	8	DRIVING TYPE	9	LED QTY
012	DC12V	CV	CONSTANT VOLTAGE	060	60 PCS LED
024	DC24V	CC	CONSTANT CURRENT	096	96 PCS LED
048	DC48V			120	120 PCS LED
230	230VAC			168	168 PCS LED
				240	240 PCS LED
				480	480 PCS LED
10	ROWS NUBER	11	CRI	12	WARRANTY
S	SINGLE ROW	80	RA>80	Y3	3 YEARS WARRANTY
D	DOUBLE ROWS	90	RA>90	Y5	5 YEARS WARRANTY
T	TRIPLE ROWS	95	RA>95		

## Symbol Description

	Input voltage DC12V		CRI Ra 80
	Input voltage DC24V		CRI Ra 95
	Input voltage DC12/24V		CRI Ra 80/90
	Input voltage DC48V		CRI Ra 80/90/95
	Input voltage AC230V		Beam Angle 120°(Top View)
	CE compliant		Beam Angle 120°(Side View)
	Restriction of Hazardous Substances		3 Step MacAdam allipse
	Dimmable		LM 80 compliant
	Protection grade		3 years warranty
	One BIN only		5 years warranty



**IP20**



**IP65**





**IP66**




**IP67**

# FLEXBLE WALL WASHER




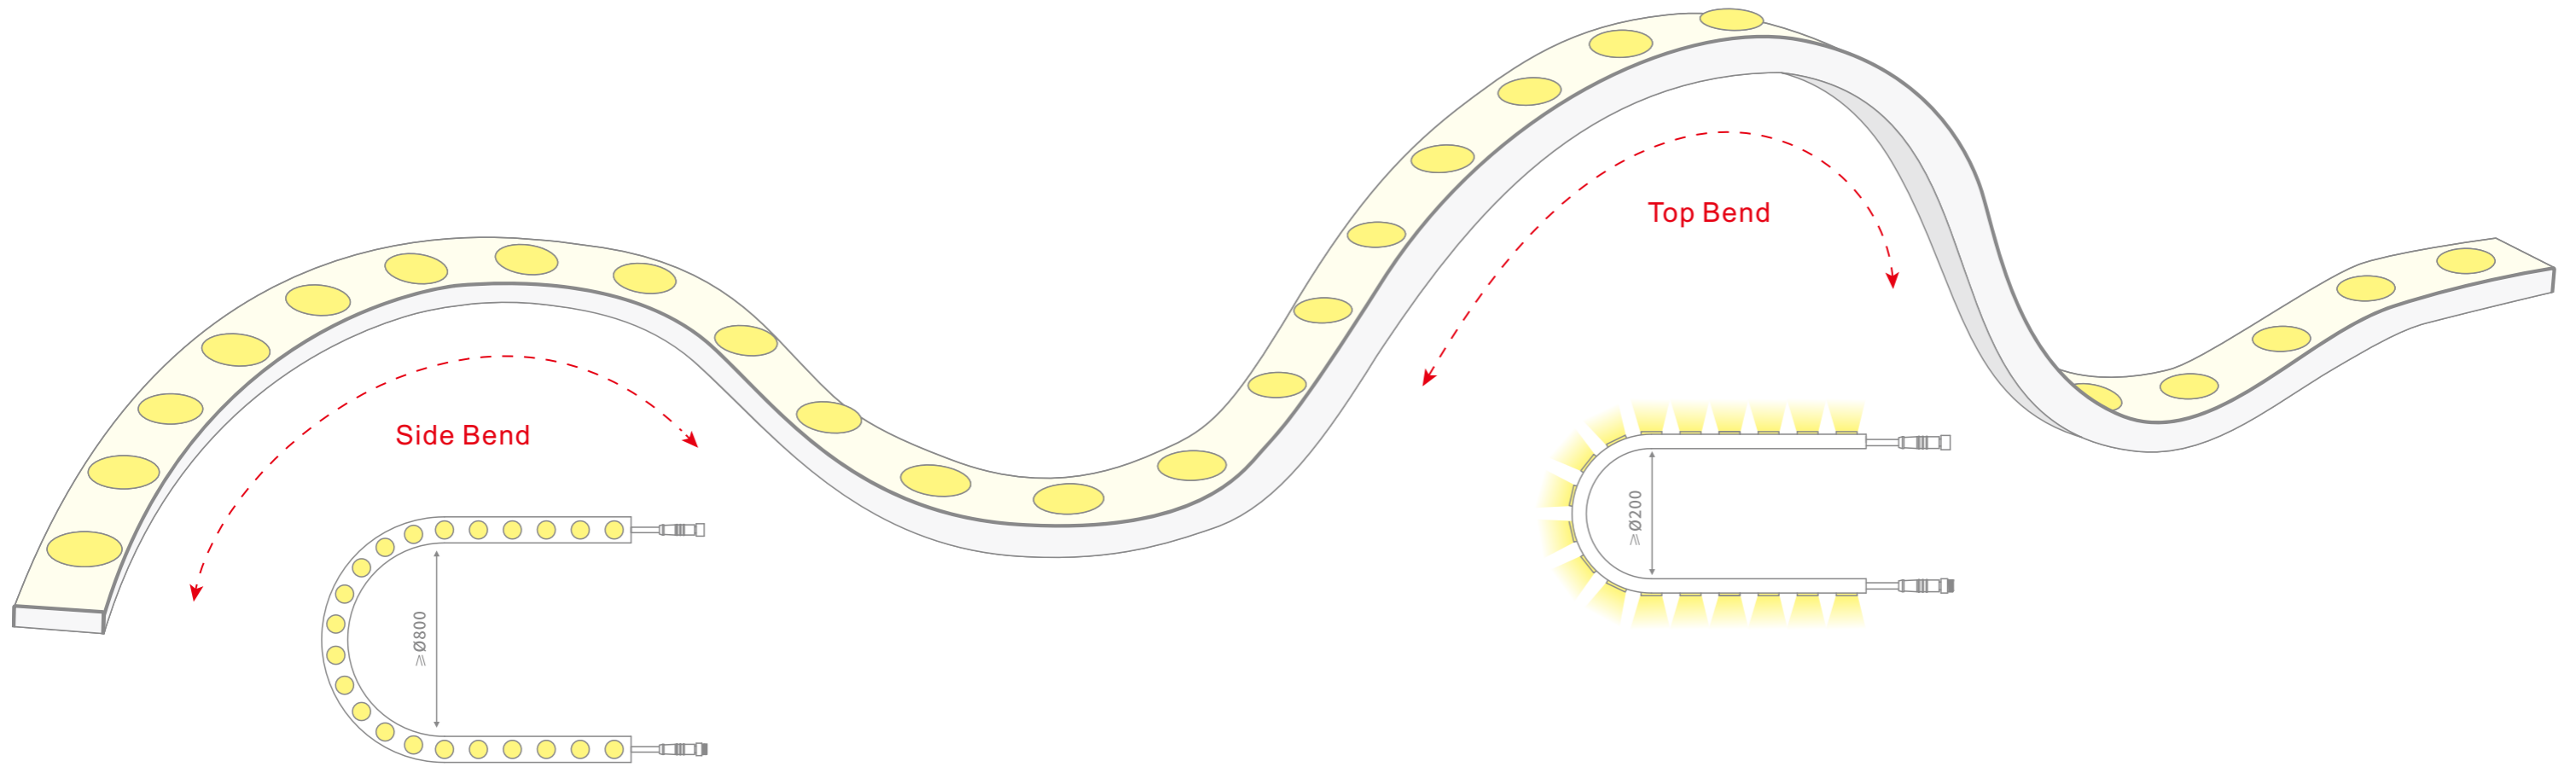


2527




2020




1616



1409T




1409P




2211


2PIN




3PIN




4PIN



5PIN



6PIN




3D BEND 2527 FLEXIBLE WALL WASHER



24V DC 2527 3D Bendable Flexible Wall Washer

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
W20W65-3030XX-024CV-024S-MY3-2527	24	24	24	1440	60	White	80/90	Not cuttable	30° / 10°*60°
W20W65-3030TW-024CV-024S-MY3-2527	24	24	24	1500	60	CCT	80/90	Not cuttable	30° / 10°*60°
W20W65-3030TC-024CV-024S-MY3-2527	24	24	24	N/A	60	RGB	80/90	Not cuttable	30° / 10°*60°
W20W65-3535MC-024CV-024S-MY3-2527	24	24	24	N/A	N/A	RGBW	80/90	Not cuttable	30° / 10°*60°
W20W65-3030TC-024AD-024S-MY3-2527	24	24	24	N/A	N/A	RGB SPI	80/90	Not cuttable	30° / 10°*60°
W20W65-3535MC-024AD-024S-MY3-2527	24	24	24	N/A	N/A	RGBW SPI	80/90	Not cuttable	30° / 10°*60°
W20W65-3030XX-024DMX-024S-MY3-2527	24	24	24	1440	60	White DMX	80/90	Not cuttable	30° / 10°*60°
W20W65-3030TW-024DMX-024S-MY3-2527	24	24	24	1440	60	CCT DMX	80/90	Not cuttable	30° / 10°*60°
W20W65-3030TC-024DMX-024S-MY3-2527	24	24	24	N/A	N/A	RGB DMX	80/90	Not cuttable	30° / 10°*60°
W20W65-3535MC-024DMX-024S-MY3-2527	24	24	24	N/A	N/A	RGBW DMX	80/90	Not cuttable	30° / 10°*60°

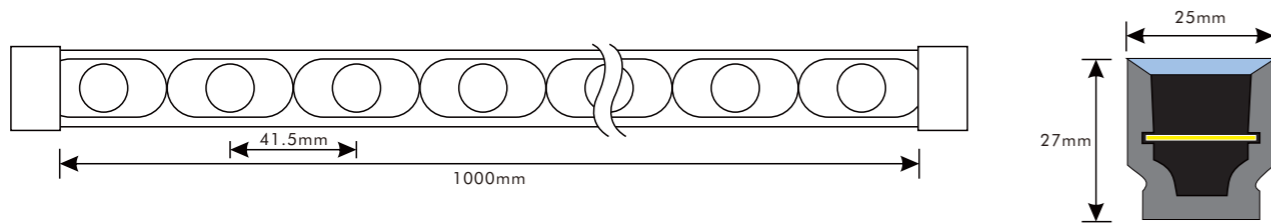

Optional Accessories



Item#	Description
3CP-2527-004	Aluminum Clips for 2527 wall washer, 20mm, for straight wire out
3CP-2527-005	Aluminum Channel for 2527 wall washer, 1000mm, for straining wire out
3CP-2527-005A	Aluminum Channel for 2527 wall washer, 1000mm, for bottom wire out
3CP-2527-006	Flexible channel for 2527 wall washer
3CP-2527-008	Adjustable-angle Clips




3D BEND 2020 FLEXIBLE WALL WASHER



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
W12W65-3030XX-024CV-024S-MY3-2020	24	18	24	1440	60	White	80/90	Not cuttable	30°
W12W65-3030TW-024CV-024S-MY3-2020	24	18	24	1440	60	CCT	80/90	Not cuttable	30°
W12W65-3030TC-024CV-024S-MY3-2020	24	18	24	N/A	N/A	RGB	80/90	Not cuttable	30°
W12W65-3535MC-024CV-024S-MY3-2020	24	18	24	N/A	N/A	RGBW	80/90	Not cuttable	30°
W12W65-3030TC-024AD-024S-MY3-2020	24	18	24	N/A	N/A	RGB SPI	80/90	Not cuttable	30°
W12W65-3535MC-024AD-024S-MY3-2020	24	18	24	N/A	N/A	RGBW SPI	80/90	Not cuttable	30°
W12W65-3030XX-024DMX-024S-MY3-2020	24	18	24	1440	60	White DMX	80/90	Not cuttable	30°
W12W65-3030TW-024DMX-024S-MY3-2020	24	18	24	1440	60	CCT DMX	80/90	Not cuttable	30°
W12W65-3030TC-024DMX-024S-MY3-2020	24	18	24	N/A	N/A	RGB DMX	80/90	Not cuttable	30°
W12W65-3535MC-024DMX-024S-MY3-2020	24	18	24	N/A	N/A	RGBW DMX	80/90	Not cuttable	30°

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. It is different with IP65, IP66, IP67, IP68

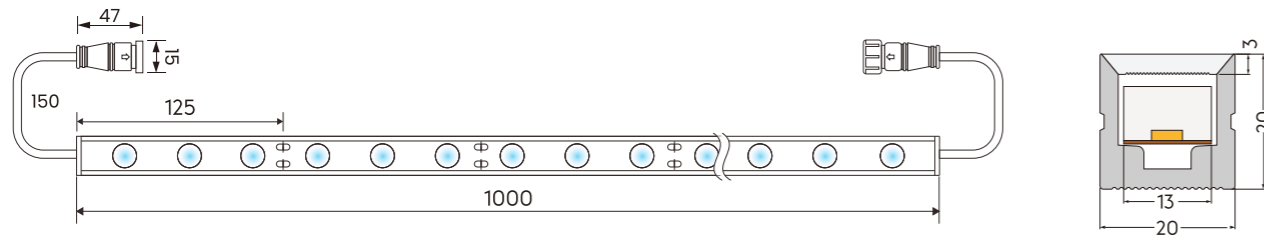

Optional Accessories



2PCN-2020-003



2PCN-2020-003



2PCN-2020-004



2PCN-2020-005



2PCN-2020-006



2PCN-2020-001

Item#	Description
2PCN-2020-001	Silicone material, for 20*20mm end cap with hole for wire, come out in strange
2PCN-2020-002	Silicone material, for 20*20mm end cap with hole for wire, come out from side
2PCN-2020-003	Silicone material, for 20*20mm end cap without hole
2PCN-2020-004	Aluminum clips, 2mm length
2PCN-2020-005	Aluminum channel for 20*20mm one meter length
2PCN-2020-006	Flexible Aluminum channel for 20*20mm one meter length




3D BEND 1616 FLEXIBLE WALL WASHER



24V DC	1616 3D Bendable Flexible Wall Washer	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
		W12W65-283527-024CV-048S-MY3-1616	24	16	48	1425	95	2700	80/90	Not cuttable	30°/ 30°45°
		W12W65-283530-024CV-048S-MY3-1616	24	16	48	1500	100	CCT	80/90	Not cuttable	30°/ 30°45°
		W12W65-283540-024CV-048S-MY3-1616	24	16	48	1575	105	RGB	80/90	Not cuttable	30°/ 30°45°
		W12W65-283560-024CV-048S-MY3-1616	24	16	48	1500	100	RGBW	80/90	Not cuttable	30°/ 30°45°

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

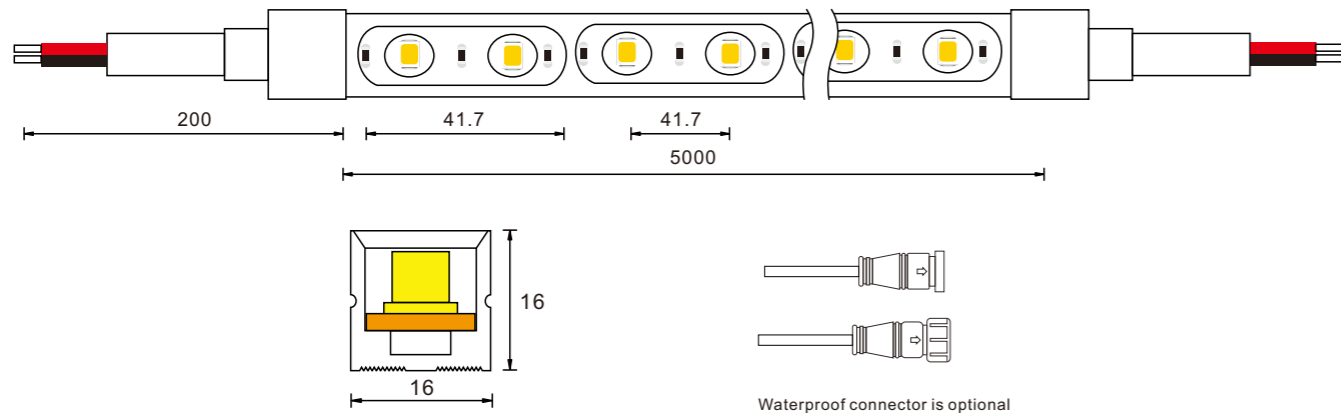

Optional Accessories



Item#	Description
2PCN-1616-001	Silicone material, for 16*16mm end cap with hole for wire, come out in strange
2PCN-1616-002	Silicone material, for 16*16mm end cap with hole for wire, come out from side
2PCN-1616-003	Silicone material, for 16*16mm end cap without hole
2PCN-1616-004	Aluminum clips, 2mm length
2PCN-1616-005	Aluminum channel for 16*16mm one meter length
2PCN-1616-006	Flexible Aluminum channel for 16*16mm one meter length




30\*45 DEGREE 60 LED FLEXIBLE WALL WASHER



24V DC T1409 30*45 Degree 60LEDs Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (°)	
W10W67-283527-024CV-060S-MY3-T1409	24	18	60	1300	72	2700	80/90	50	30*45	
W10W67-283530-024CV-060S-MY3-T1409	24	18	60	1380	76	3000	80/90	50	30*45	
W10W67-283540-024CV-060S-MY3-T1409	24	18	60	1450	80	4000	80/90	50	30*45	
W10W67-283560-024CV-060S-MY3-T1409	24	18	60	1450	80	6000	80/90	50	30*45	

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

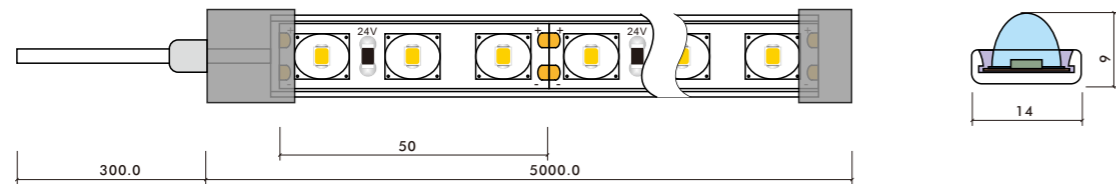

2PCN-1409-004



2PCN-1409-005


Item#	Description
2PCN-1409-004	Aluminum cilpsfor for 1409 Wall washer 20mm
2PCN-1409-005	Aluminum channel for for 1409 Wall washer, one meter

60 DEGREE 60 LED FLEXIBLE WALL WASHER



24V DC P1409 60 Degree 60LEDs Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (°)	
W10W67-283527-024CV-060S-MY3-P1409	24	18	60	1300	72	2700	80/90	50	60	
W10W67-283530-024CV-060S-MY3-P1409	24	18	60	1380	76	3000	80/90	50	60	
W10W67-283540-024CV-060S-MY3-P1409	24	18	60	1450	80	4000	80/90	50	60	
W10W67-283560-024CV-060S-MY3-P1409	24	18	60	1450	80	6000	80/90	50	60	

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

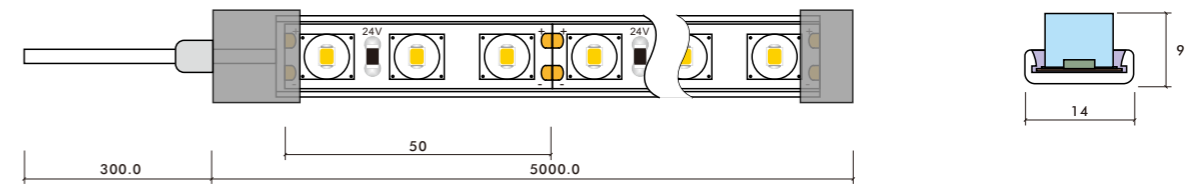

2PCN-1409-004



2PCN-1409-005


Item#	Description
2PCN-1409-004	Aluminum cilpsfor for 1409 Wall washer 20mm
2PCN-1409-005	Aluminum channel for for 1409 Wall washer, one meter

2211 SINGLE COLOR FLEXIBLE WALL WASHSER



24V DC White Color 42LEDs Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
W18W67-2835XX-024CV-042S-MY3-2209	24	15	42	1000	100	CCT	80/90	143.8	60	
W18W67-2835XX-024CV-042S-MY3-2209	24	15	42	1000	100	CCT	80/90	143.8	60	
W18W67-2835XX-024CV-042S-MY3-2209	24	15	42	1000	100	CCT	80/90	143.8	60	
W18W67-2835XX-024CV-042S-MY3-2209	24	15	42	1000	100	CCT	80/90	143.8	60	

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

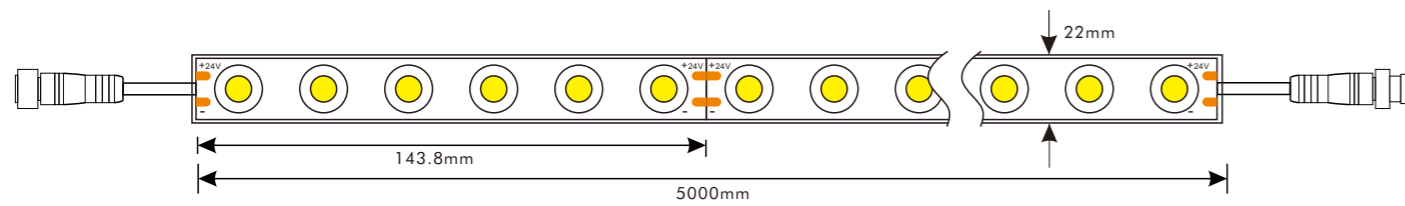

2PCN-2211-004



2PCN-2211-005


Item#	Description
2PCN-2211-004	Aluminum cilpsfor for 2211 Wall washer 20mm
2PCN-2211-005	Aluminum channel for for 2211 Wall washer, one meter

2211 MINI CUT SINGLE COLOR FLEXIBLE WALL WASHSER



24V AC Mini Cut White Color 42LEDs Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
W18W67-2835XX-024CV-042S-MY3-2211MC	24	15	42	N/A	N/A	RGB	80/90	23.8	60	
W18W67-2835XX-024CV-042S-MY3-2211MC	24	15	42	N/A	N/A	RGB	80/90	23.8	60	
W18W67-2835XX-024CV-042S-MY3-2211MC	24	15	42	N/A	N/A	RGB	80/90	23.8	60	
W18W67-2835XX-024CV-042S-MY3-2211MC	24	15	42	N/A	N/A	RGB	80/90	23.8	60	

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

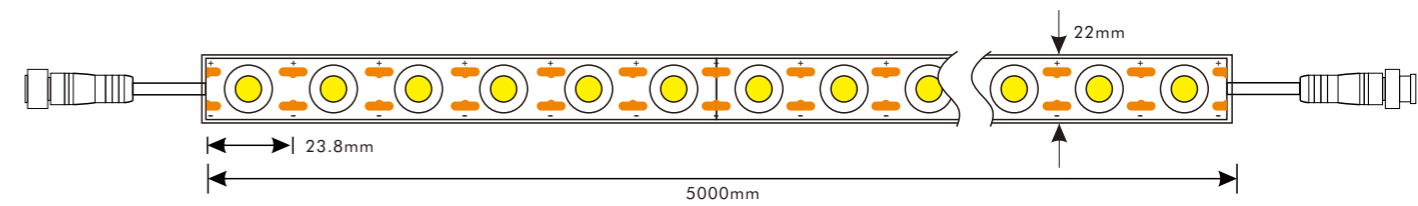

2PCN-2211-004



2PCN-2211-005


Item#	Description
2PCN-2211-004	Aluminum cilpsfor for 2211 Wall washer 20mm
2PCN-2211-005	Aluminum channel for for 2211 Wall washer, one meter

2211 CCT COLOR FLEXIBLE WALL WASHSER



24V DC CCT Color 42LED Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
W18W67-5050TW-024CV-042S-MY3-2211	24	15	42	1050	70	CCT	80/90	47.6	60	

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

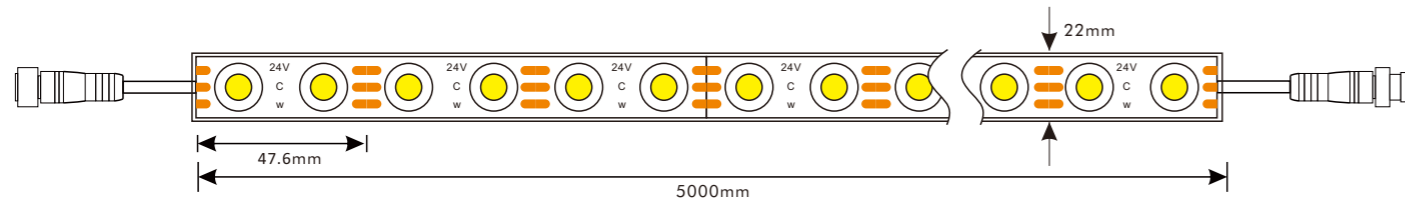

2PCN-2211-004



2PCN-2211-005


Item#	Description
2PCN-2211-004	Aluminum cilpsfor for 2211 Wall washer 20mm
2PCN-2211-005	Aluminum channel for for 2211 Wall washer, one meter

2211 RGB COLOR FLEXIBLE WALL WASHER



24V AC RGB Color 42LEDs Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
W18W67-5050TC-024CV-042S-MY3-2211	24	15	42	N/A	N/A	RGB	80/90	143.8	120	

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

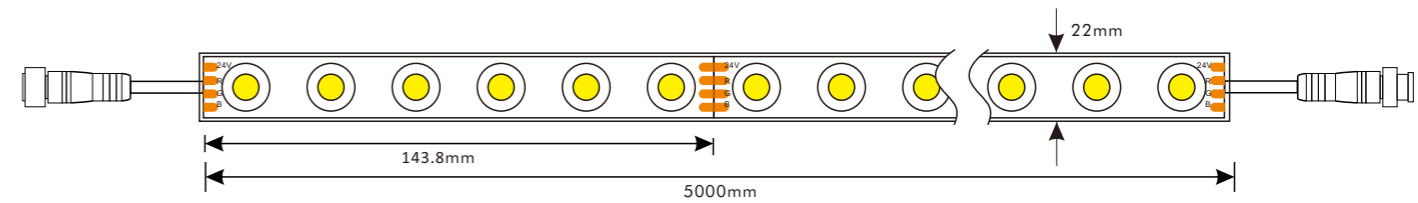

2PCN-2211-004



2PCN-2211-005


Item#	Description
2PCN-2211-004	Aluminum cilpsfor for 2211 Wall washer 20mm
2PCN-2211-005	Aluminum channel for for 2211 Wall washer, one meter

2211 RGBW COLOR FLEXIBLE WALL WASHER



24V DC RGBW Color 42LEDs Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
W18W67-5050MC-024CV-042S-MY3-2211	24	15	42	N/A	N/A	RGBW	80/90	143.8	60	

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

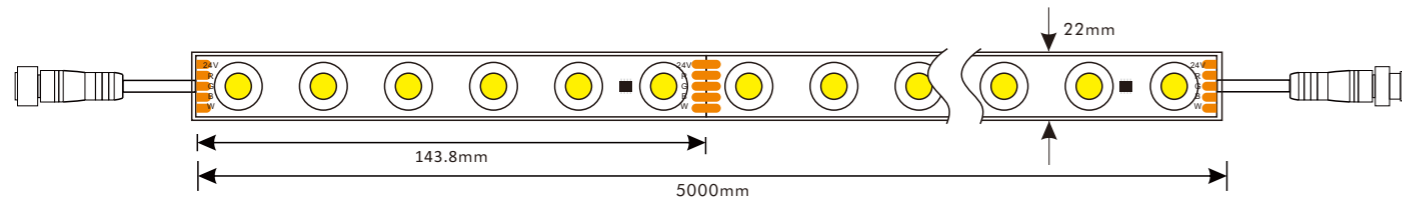

2PCN-2211-004



2PCN-2211-005


Item#	Description
2PCN-2211-004	Aluminum cilpsfor for 2211 Wall washer 20mm
2PCN-2211-005	Aluminum channel for for 2211 Wall washer, one meter

42LEDs RGB DMX 512 FLEXIBLE WALL WASHER



24V AC RGB Color DMX 512 Flexible Wall Washer										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
W18W67-5050TC-024DMX-042S-MY3-2209	24	15	42	N/A	N/A	RGB	80/90	143.8	120	

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

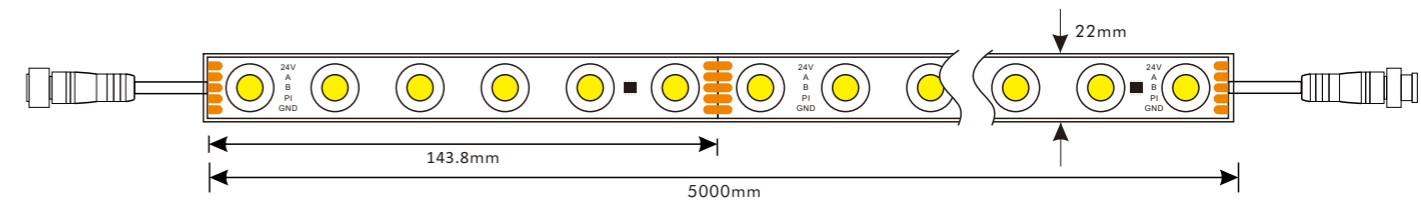

2PCN-2211-004



2PCN-2211-005

Item#	Description
2PCN-2211-004	Aluminum cilpsfor for 2211 Wall washer 20mm
2PCN-2211-005	Aluminum channel for for 2211 Wall washer, one meter


2211 RGBW DMX512 FLEXIBLE WALL WASHER



**24V DC** RGBW Color DMX 512 Flexible Wall Washer

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
W18W67-5050MC-024DMX-042S-MY3-2211	24	15	42	N/A	N/A	RGBW DMX	80/90	143.8	60

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

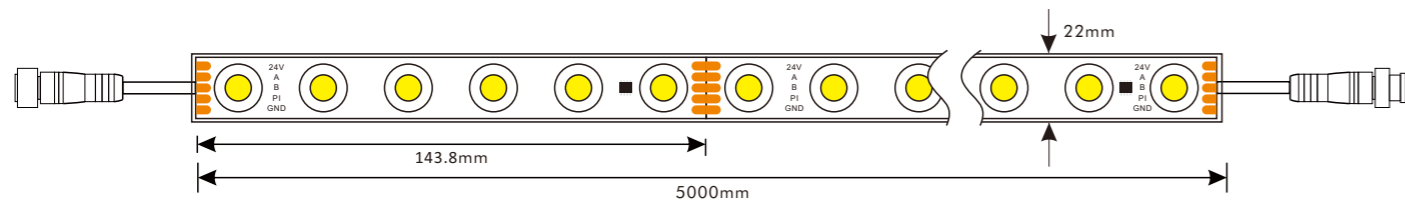

Item#	Description
2PCN-2211-004	Aluminum clips for for 2211 Wall washer 20mm
2PCN-2211-005	Aluminum channel for for 2211 Wall washer, one meter



# FLEX PANEL SHEET

FLEX PANEL SHEET

FLEX PANEL SHEET-WHITE COLOR

**NEW**



24V DC 490*245MM White Color Flex Panel Sheet										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
SPSW20-283527-024CV-242M-MY3-490245	24	28	242	2520	90	2700	80/90	22.3*22.3	120	
SPSW20-283530-024CV-242M-MY3-490245	24	28	242	2660	95	3000	80/90	22.3*22.3	120	
SPSW20-283540-024CV-242M-MY3-490245	24	28	242	2800	100	4000	80/90	22.3*22.3	120	
SPSW20-283560-024CV-242M-MY3-490245	24	28	242	2660	95	6000	80/90	22.3*22.3	120	



FLEX PANEL SHEET-CCT


NEW



24V DC 490*245MM CCT Color Flex Panel Sheet										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
SPSW20-5050TW-024CV-484M-MY3-490245	24	40	484	3800	90	CCT	80/90	22.3*22.3	120	

FLEX PANEL SHEET-RGB

NEW

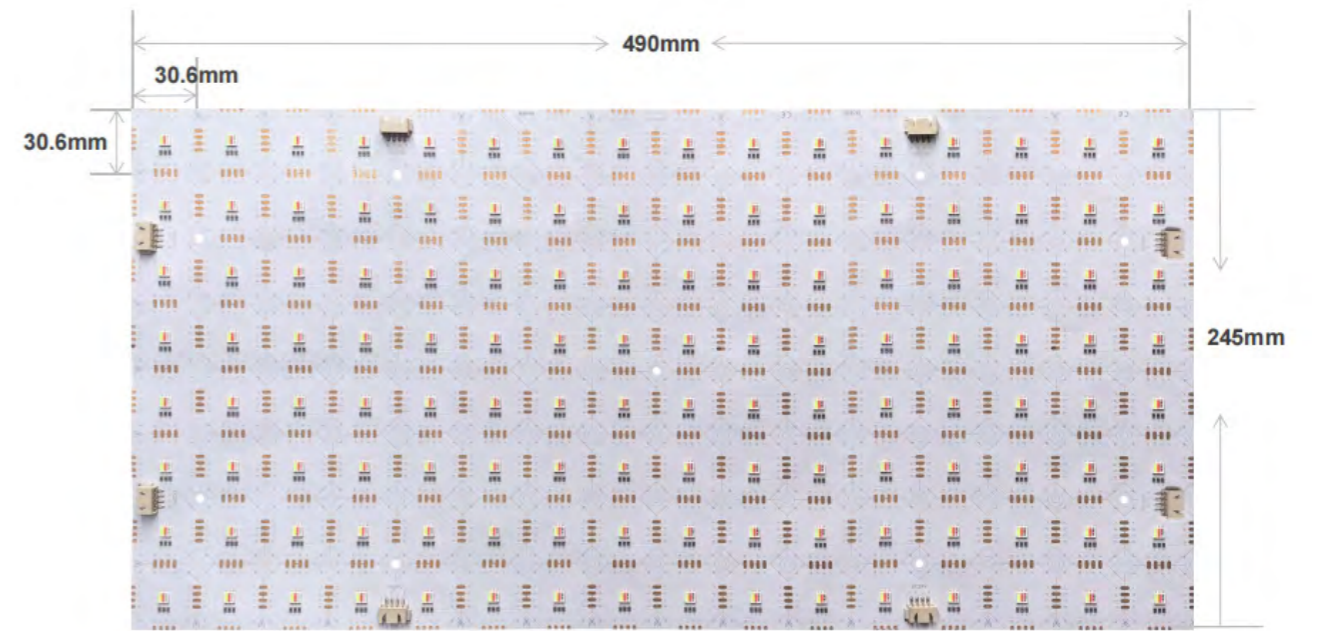

24V DC 490*245MM RGB Color Flex Panel Sheet										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
SPSW20-5050TC-024CV-128M-MY3-490245	24	45	128	N/A	N/A	RGB	N/A	30.6*30.6	120	



FLEX PANEL SHEET-RGBW

NEW




24V DC 490*245MM RGBW Color Flex Panel Sheet										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
SPSW20-5050MC-024CV-288M-MY3-490245	24	48	288	N/A	N/A	RGBW	80/90	125*20.4	120	

FLEX PANEL SHEET-RGBW

NEW




24V DC 490*245MM RGBW Color Flex Panel Sheet										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
SPSW20-2835MC-024CV-512M-MY3-490245	24	45	512	N/A	N/A	RGBW	80/90	30.6*30.6	120	

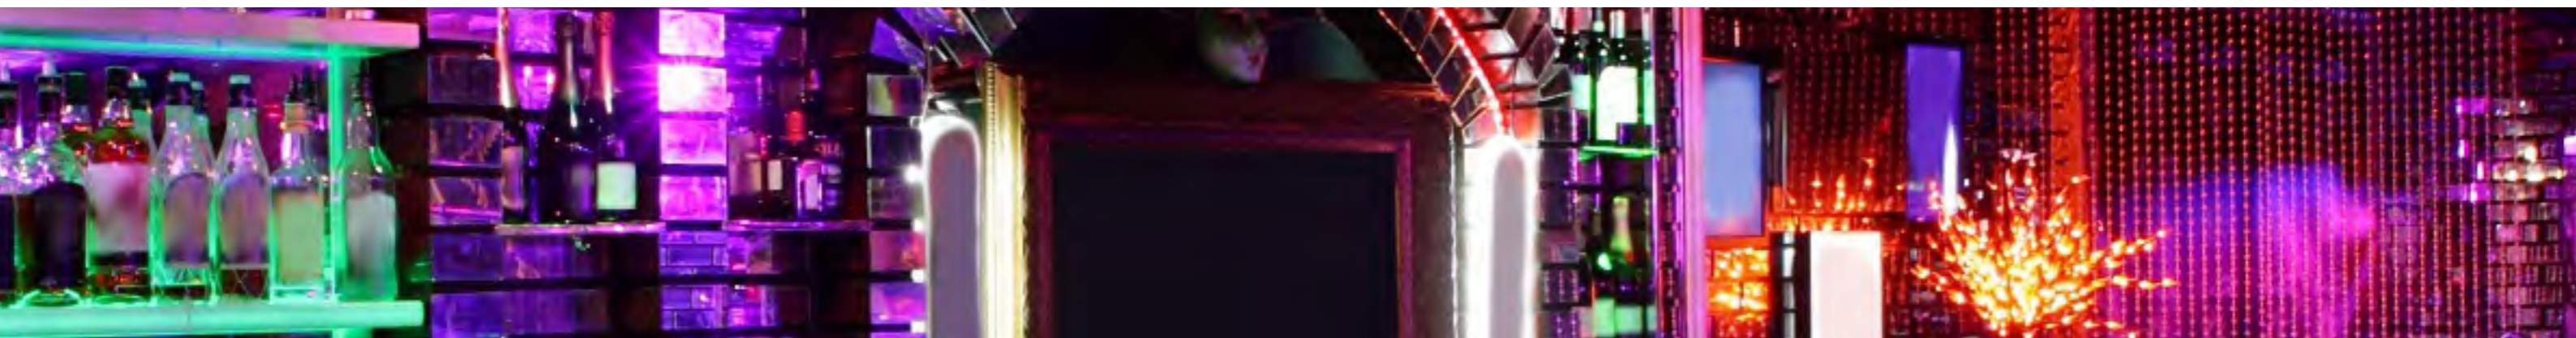

FLEX PANEL SHEET-RGBCCT

NEW

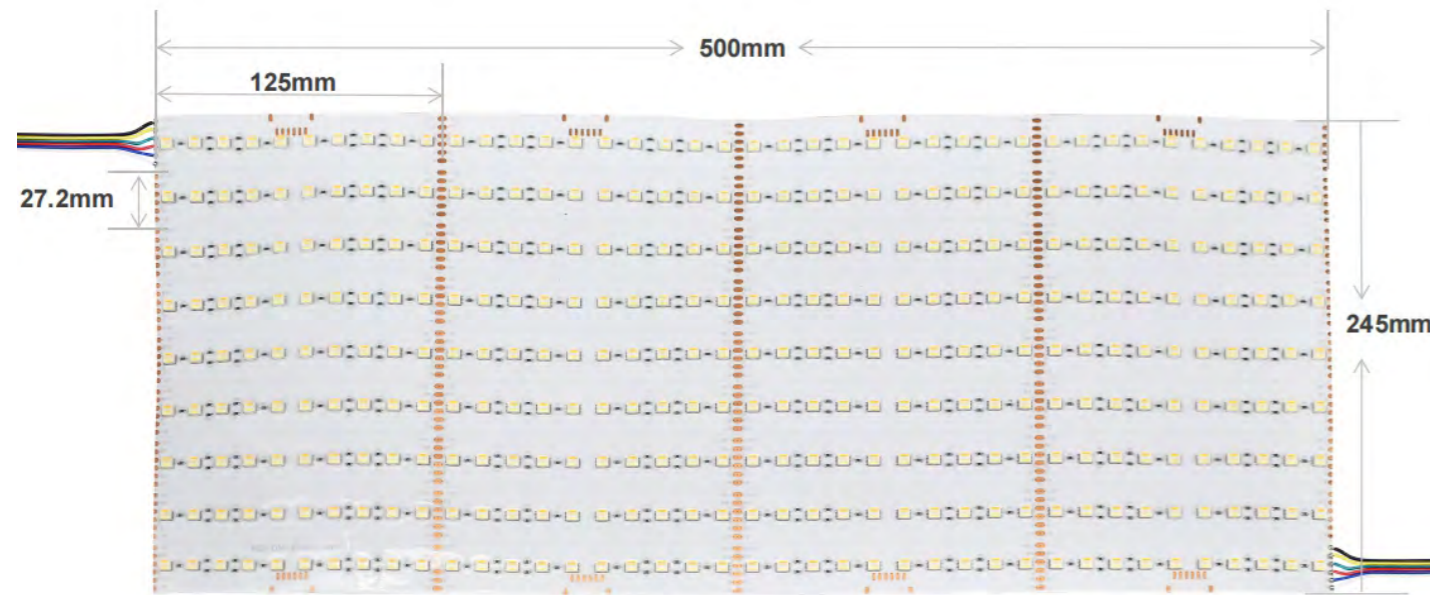


24V DC 490*245MM RGBCCT Color Flex Panel Sheet										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
SPSW20-5050FC-024CV-360M-MY3-490245	24	60	360	N/A	N/A	RGBWW	80/90	125*27.2	120	



FLEX PANEL SHEET-WHITE WITH LENS

NEW

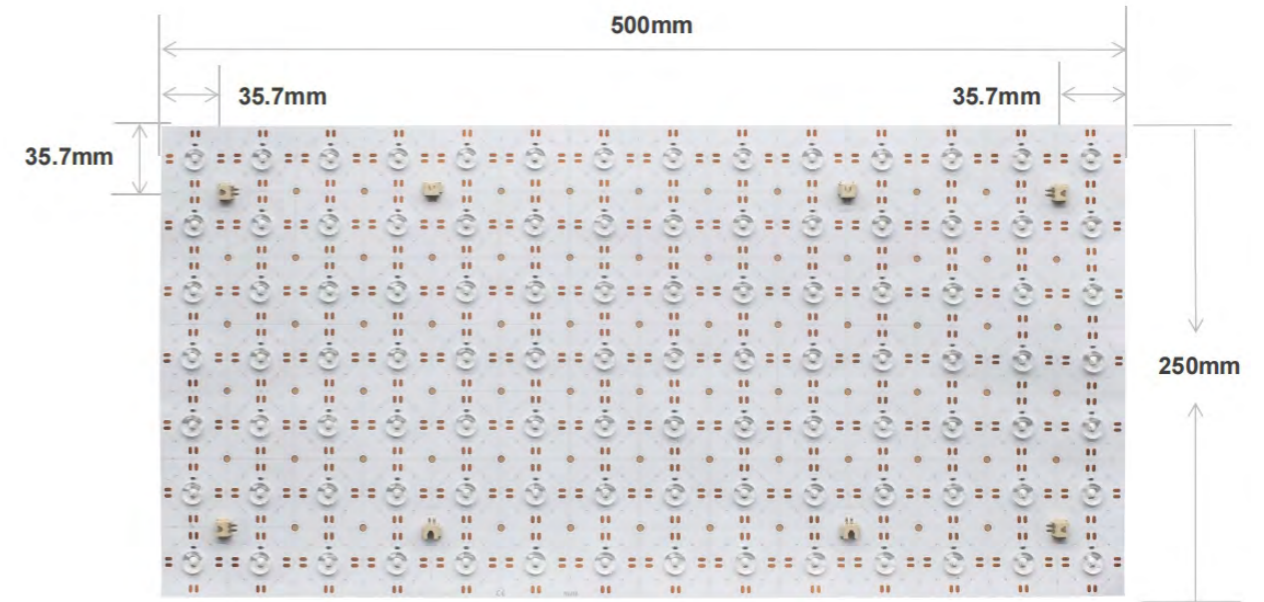


24V DC 490*245MM WHITE Color Flex Panel Sheet With Lens										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
SPSW20-283527-024CV-098M-MY3-490250	24	20	98	1800	90	2700	80/90	35.7*35.7	160	
SPSW20-283530-024CV-098M-MY3-490250	24	20	98	1900	95	3000	80/90	35.7*35.7	160	
SPSW20-283540-024CV-098M-MY3-490250	24	20	98	2000	100	4000	80/90	35.7*35.7	160	
SPSW20-283560-024CV-098M-MY3-490250	24	20	98	1900	95	6000	80/90	35.7*35.7	160	



FLEX PANEL SHEET-DIGITAL RGB

**NEW**

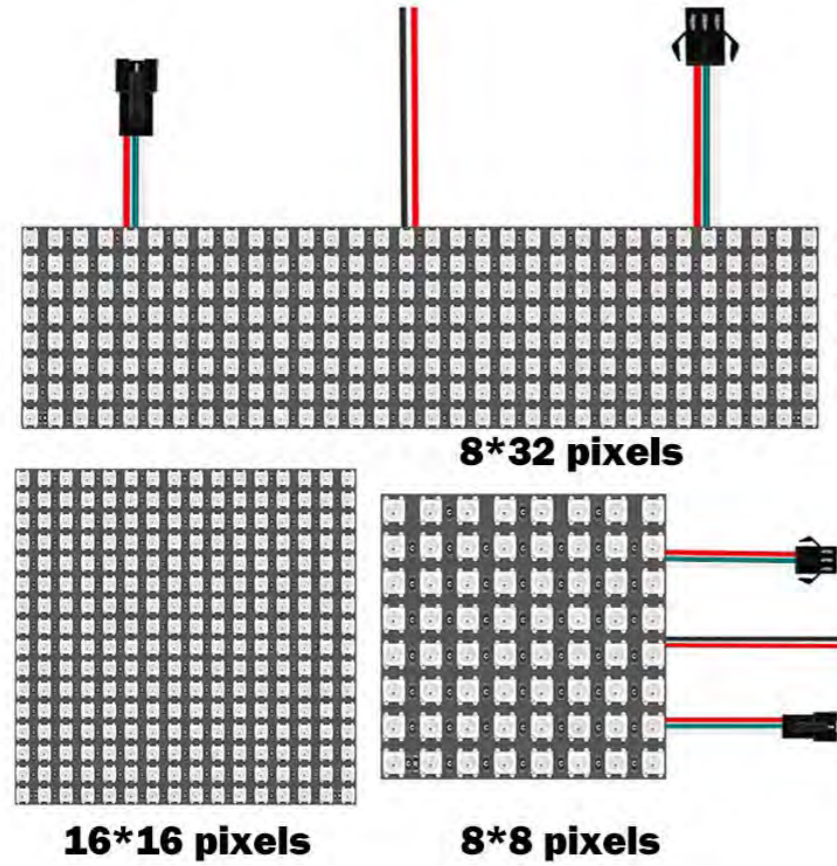

5V DC

Digital RGB Color Flex Panel Sheet

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
SPSW20-5050TC-005AD-064M-MY3-8080	5	15	64	N/A	N/A	RGBIC(SK6812)	80/90	10*10	120
SPSW20-5050TC-005AD-256M-MY3-160160	5	35	256	N/A	N/A	RGBIC(SK6812)	80/90	10*10	120
SPSW20-5050TC-005AD-256M-MY3-80320	5	35	256	N/A	N/A	RGBIC(SK6812)	80/90	10*10	120



12V DC

Digital RGB Color Flex Panel Sheet

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
SPSW20-5050TC-012AD-064M-MY3-8080	12	15	64	N/A	N/A	RGBIC(SK6813)	80/90	10*10	120
SPSW20-5050TC-012AD-256M-MY3-160160	12	35	256	N/A	N/A	RGBIC(SK6813)	80/90	10*10	120
SPSW20-5050TC-012AD-256M-MY3-80320	12	35	256	N/A	N/A	RGBIC(SK6813)	80/90	10*10	120



# AC LED STRIP LIGHT




## GUIDE LINE FOR AC LED STRIP LIGHT

SERIES	ITEM NUMBER	VOLTAGE	POWER	LED QTY	LED TYPE	CUT UNIT	WIDTH
Single Color	S10WXX-283527-230CC-120S-MY3	230V	15	120	2835	100	12
	S10WXX-2835XX-230CC-120S-MY3-PRO	230V	15	120	2835	50	12
	S08WXX-2835XX-230CV-120S-MY3-ECO	230V	8	120	2835	100	10
	S15WXX-2835XX-230CC-240S-MY3	230V	20	240	2835	50	15
CCT	S10WXX-2835TW-230CC-096S-MY3	230V	10	96	2835	50	15
RGB	S12WXX-5050TC-230CV-072S-MY3	230V	15	72	5050	500	14
RGBW	S12WXX-5050MC-230CV-072S-MY3	230V	15	72	5050	500	14
COB	S10WXX-FCOB27-230CV-432S-MY3	230V	12	432	COB	167	12
	S10WXX-FCOB27-230CV-480S-MY3	230V	12	480	COB	100	12



2835 120LED 230V SINGLE COLOR STRIP LIGHT

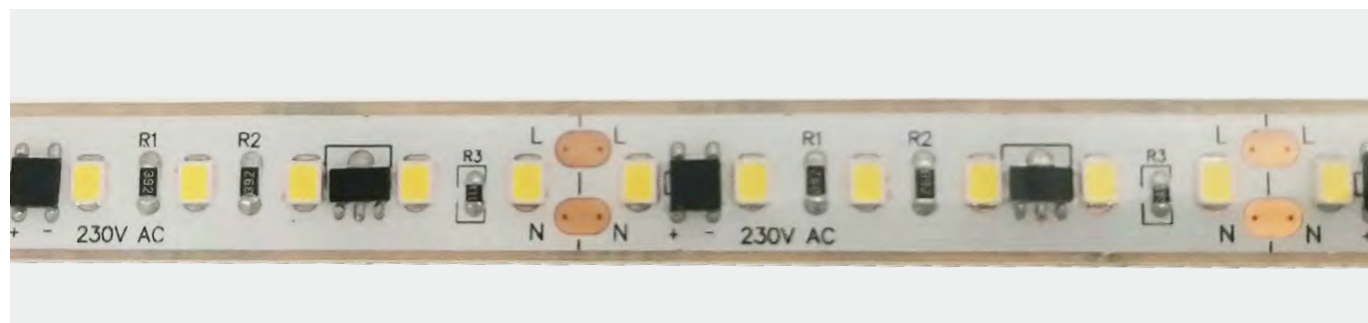

230V AC 12mm 2835 120LED 100mm Cutting Single Color LED Strip

Model Number	Voltage (ac v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-283527-230CC-120S-MY3	230	15	120	1425	95	2700	80/90	100	120
S10WXX-283530-230CC-120S-MY3	230	15	120	1500	100	3000	80/90	100	120
S10WXX-283540-230CC-120S-MY3	230	15	120	1575	105	4000	80/90	100	120
S10WXX-283560-230CC-120S-MY3	230	15	120	1500	100	6000	80/90	100	120


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



2PCN-BTB-004      2PCN-BCB-004      2PCN-CTB-004      BY-RT1      BY-S3

Item#	Description
2PCN-BTB-004	2pin Waterproof connector for strip and strip light , for 12mm width 230V LED strip light with 10mm PCB
2PCN-BCB-004	2pin Waterproof connector with 200mm wire for strip and strip light , for 12mm width 230V LED strip light with 10mm PCB
2PCN-CTB-004	2pin Waterproof connector for power and strip light , for 12mm width 230V LED strip light with 10mm PCB
BY-RT1	Remote for 230V led strip light
BY-S3	Controller for 230V led strip light

2835 120LED 230V 50MM CUT SINGLE COLOR STRIP LIGHT

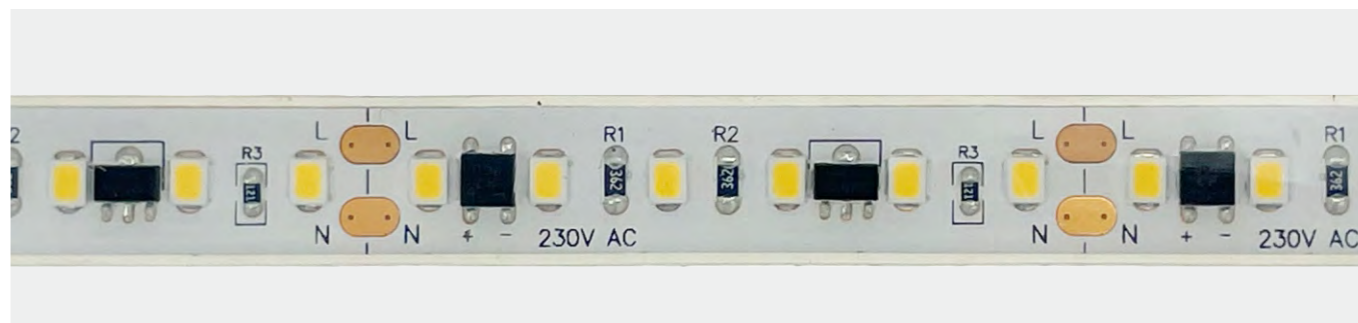

12mm 2835 120LED 50mm Cutting Single Color LED Strip

Model Number	Voltage (ac v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-283527-230CC-120S-MY3-PRO	230	15	120	1425	95	2700	80/90	50	120
S10WXX-283530-230CC-120S-MY3-PRO	230	15	120	1500	100	3000	80/90	50	120
S10WXX-283540-230CC-120S-MY3-PRO	230	15	120	1575	105	4000	80/90	50	120
S10WXX-283560-230CC-120S-MY3-PRO	230	15	120	1500	100	6000	80/90	50	120


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



2PCN-BTB-004      2PCN-BCB-004      2PCN-CTB-004      BY-RT1      BY-S3

Item#	Description
2PCN-BTB-004	2pin Waterproof connector for strip and strip light , for 12mm width 230V LED strip light with 10mm PCB
2PCN-BCB-004	2pin Waterproof connector with 200mm wire for strip and strip light , for 12mm width 230V LED strip light with 10mm PCB
2PCN-CTB-004	2pin Waterproof connector for power and strip light , for 12mm width 230V LED strip light with 10mm PCB
BY-RT1	Remote for 230V led strip light
BY-S3	Controller for 230V led strip light

2835 120LED 230V SINGLE COLOR STRIP LIGHT

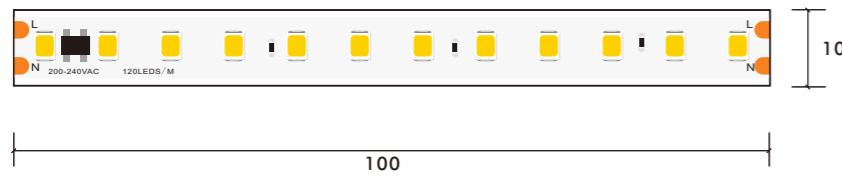

**230V AC 10mm 2835 120LED 100mm Cutting Single Color LED Strip**



Model Number	Voltage (ac v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-283527-230CV-120S-MY3-ECO	230	8	120	640	80	2700	80/90	100	120
S08WXX-283530-230CV-120S-MY3-ECO	230	8	120	765	85	3000	80/90	100	120
S08WXX-283540-230CV-120S-MY3-ECO	230	8	120	720	90	4000	80/90	100	120
S08WXX-283560-230CV-120S-MY3-ECO	230	8	120	765	85	6000	80/90	100	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



Item#	Description
2PCN-BTB-003	2pin Waterproof connector for strip and strip light , for 10mm width 230V LED strip light with 8mm PCB
2PCN-BCB-003	2pin Waterproof connector with 200mm wire for strip and strip light , for 10mm width 230V LED strip light with 8mm PCB
2PCN-CTB-003	2pin Waterproof connector for power and strip light , for 10mm width 230V LED strip light with 8mm PCB
BY-RT1	Remote for 230V led strip light
BY-S3	Controller for 230V led strip light

2835 240LED DOUBLE ROW 230V SINGLE COLOR STRIP LIGHT

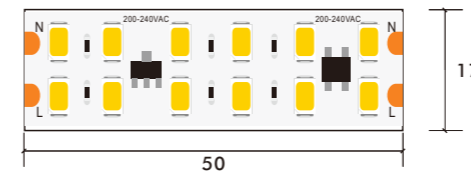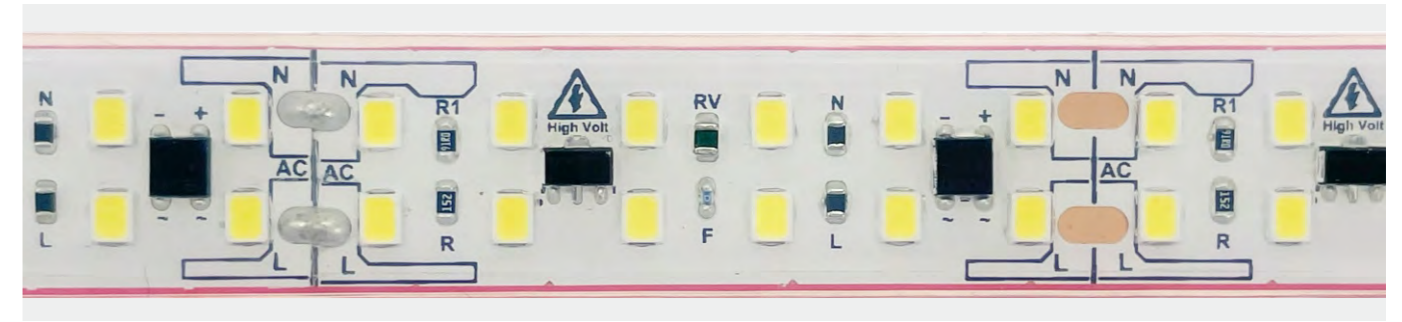

**230V AC 15mm 2835 240LED 50mm cutting Single Color LED Strip**



Model Number	Voltage (ac v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S15WXX-283527-230CC-120S-MY3-PRO	230	20	240	1600	80	2700	80/90	50	120
S15WXX-283530-230CC-120S-MY3-PRO	230	20	240	1700	85	3000	80/90	50	120
S15WXX-283540-230CC-120S-MY3-PRO	230	20	240	1800	90	4000	80/90	50	120
S15WXX-283560-230CC-120S-MY3-PRO	230	20	240	1875	95	6000	80/90	50	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



Item#	Description
BY-RT1	Remote for 230V led strip light
BY-S3	Controller for 230V led strip light

2835 96LED 230V CCT DUAL COLOR STRIP LIGHT

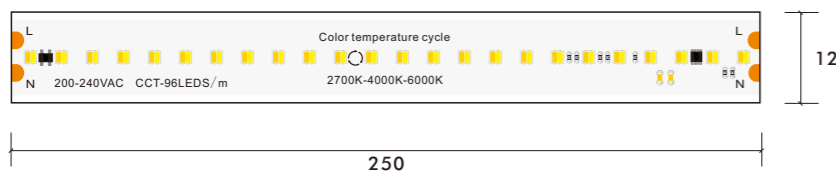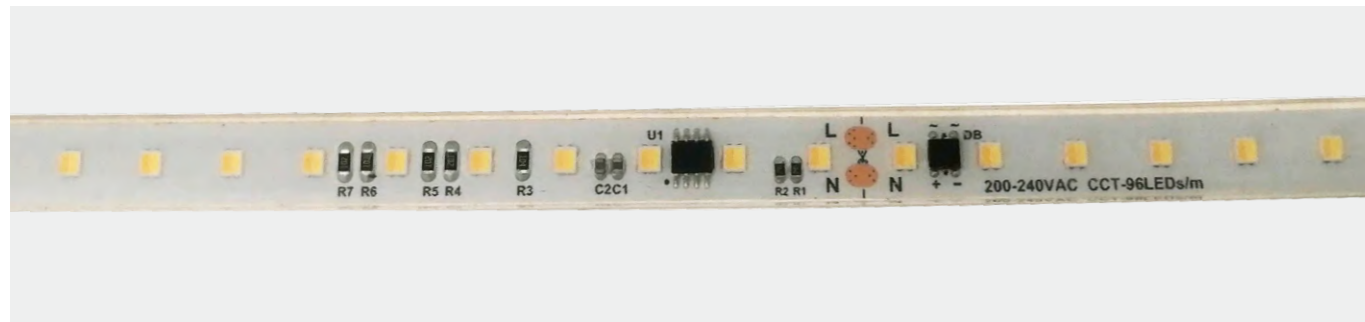

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-2835TW-230CC-096S-MY3	230	10	96	1000	100	CCT	80/90	250	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



2PCN-BTB-004




2PCN-BCB-004



2PCN-CTB-004

Item#	Description
2PCN-BTB-004	2pin Waterproof connector for strip and strip light , for 12mm width 230V LED strip light with 10mm PCB
2PCN-BCB-004	2pin Waterproof connector with 200mm wire for strip and strip light , for 12mm width 230V LED strip light with 10mm PCB
2PCN-CTB-004	2pin Waterproof connector for power and strip light , for 12mm width 230V LED strip light with 10mm PCB

5050 72LED 230V RGB COLOR STRIP LIGHT

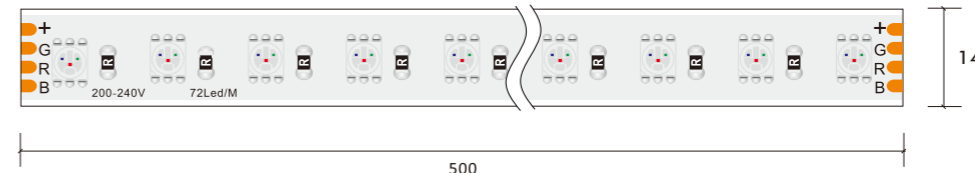

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12WXX-5050TC-230CV-072S-MY3	230	15	72	N/A	N/A	RGB	80/90	500	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



BY-S3



BY-RT4




BY-S4



BY-RS1

Item#	Description
BY-S3	230V RGB led controller, support 50meter RGB strip light
BY-RT4	230V remote board, Work with BY-S3
BY-S4	230V RGB/RGBW LED controller, support 50 meter RGB/RGBW strip light
BY-RS1	230V remote board work with BY-S4

5050 72LED 230V RGBW COLOR STRIP LIGHT

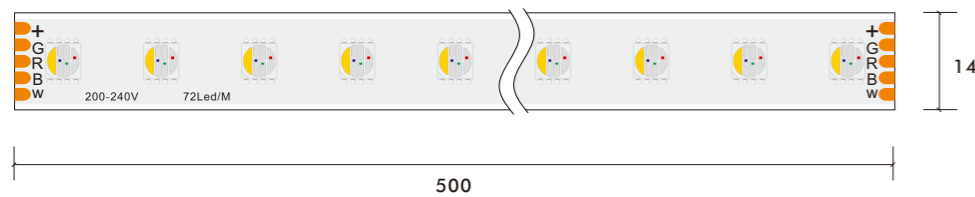

**220V AC** 14cm 230V 5050 RGBW Color LED Strip


Model Number	Voltage (ac v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12WXX-5050MC-230CV-072S-MY3	230	15	72	N/A	N/A	RGBW	80/90	500	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



Item#	Description
BY-S4	230V RGB/RGBW LED controller, support 50 meter RGB/RGBW strip light
BY-RS1	230V remote board work with BY-S4

432CHIPS 230V COB SINGLE COLOR STRIP LIGHT

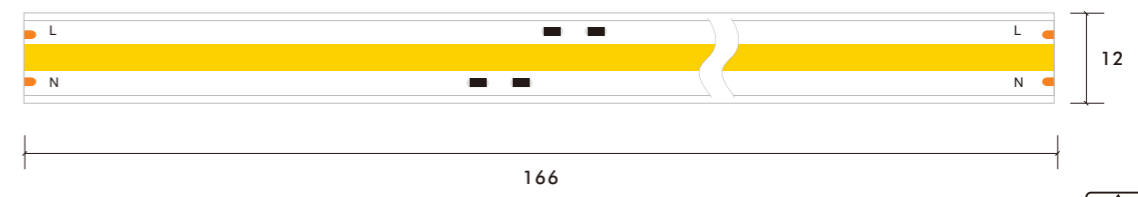

**230V AC** 12mm COB 432 Chip SINGLE Color LED Strip


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-FCOB27-230CV-432S-MY3	230	12	432	1080	90	2700	90	166	180
S10WXX-FCOB30-230CV-432S-MY3	230	12	432	1140	95	3000	90	166	180
S10WXX-FCOB40-230CV-432S-MY3	230	12	432	1200	100	4000	90	166	180
S10WXX-FCOB60-230CV-432S-MY3	230	12	432	1140	95	6000	90	166	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



Item#	Description
2PCN-BTB-005	2pin Waterproof connector for strip and strip light , for 12mm width 230V COB strip light with 10mm PCB
2PCN-BCB-005	2pin Waterproof connector with 200mm wire for strip and strip light , for 12mm width 230V COB strip light with 10mm PCB
2PCN-CTB-005	2pin Waterproof connector for power and strip light , for 12mm width 230V COB strip light with 10mm PCB
BY-RT1	Remote for 230V led strip light
BY-S3	Controller for 230V led strip light

480CHIPS 230V COB SINGLE COLOR STRIP LIGHT

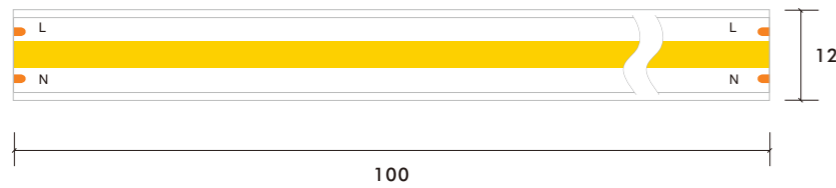

230V AC 12mm COB 480 Chip SINGLE Color LED Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-FCOB27-230CV-480S-MY3	230	12	480	1080	90	2700	90	100	180
S10WXX-FCOB30-230CV-480S-MY3	230	12	480	1140	95	3000	90	100	180
S10WXX-FCOB40-230CV-480S-MY3	230	12	480	1200	100	4000	90	100	180
S10WXX-FCOB60-230CV-480S-MY3	230	12	480	1140	95	6000	90	100	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



2PCN-BTB-005



2PCN-BCB-005



2PCN-CTB-005



BY-RT1




BY-S3

Item#	Description
2PCN-BTB-005	2pin Waterproof connector for strip and strip light , for 12mm width 230V COB strip light with 10mm PCB
2PCN-BCB-005	2pin Waterproof connector with 200mm wire for strip and strip light , for 12mm width 230V COB strip light with 10mm PCB
2PCN-CTB-005	2pin Waterproof connector for power and strip light , for 12mm width 230V COB strip light with 10mm PCB
BY-RT1	Remote for 230V led strip light
BY-S3	Controller for 230V led strip light




# HIGH EFFICACY STRIP

HIGH EFFICACY

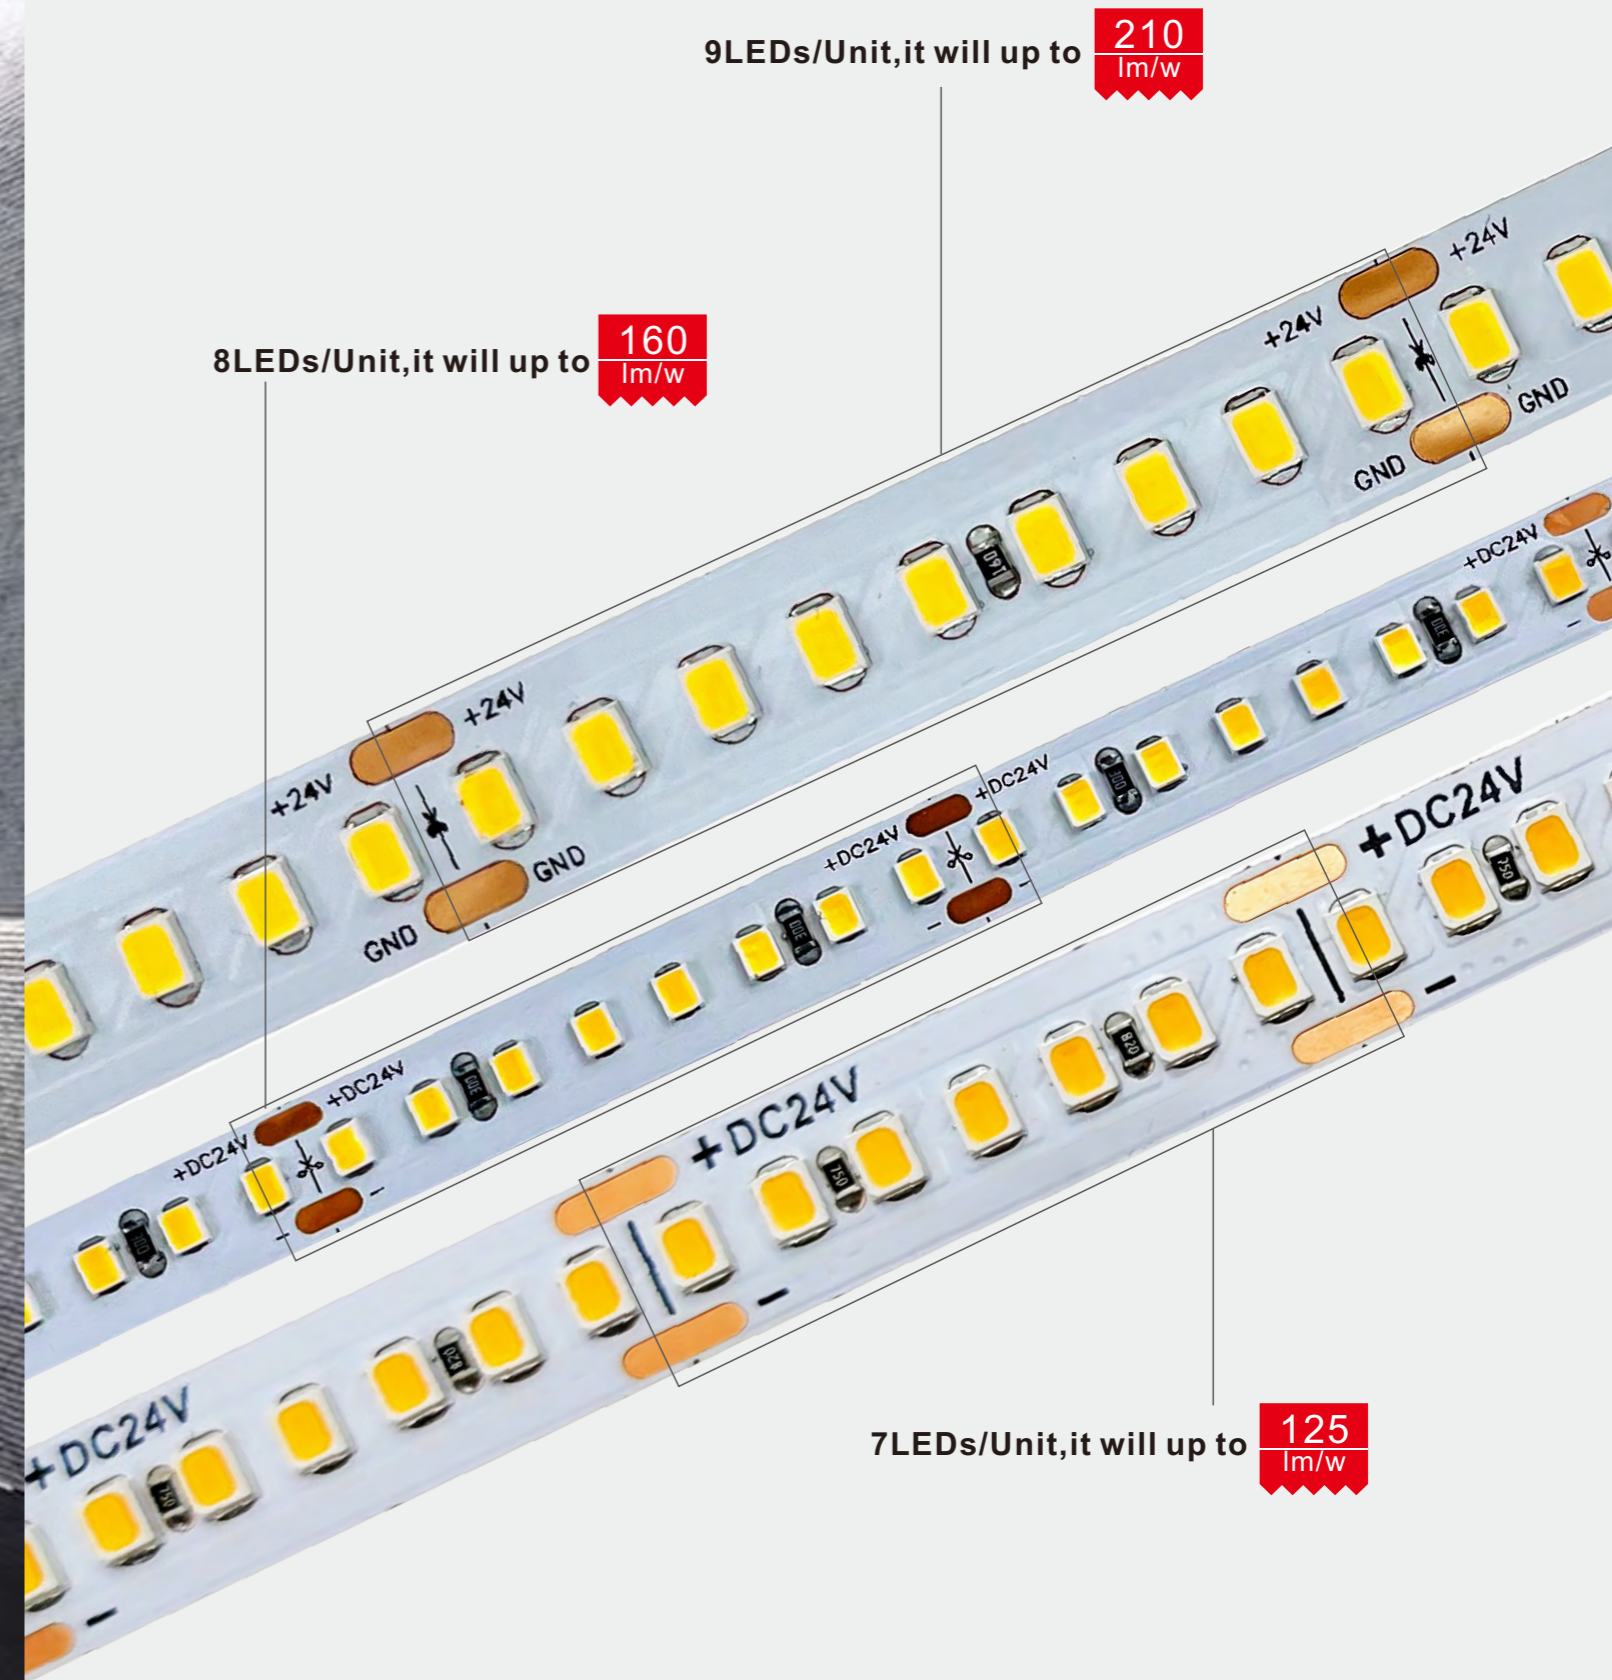

HIGH EFFICACY STRIP LIGHT


2835 8/10 MM 140LED WHITE

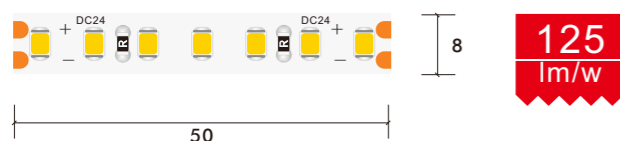

**24V DC 8mm 2835 140LED Single Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-283527-024CV-140S-MY3-HF	24	12	140	1320	110	2700	80/90	50	120
S08WXX-283530-024CV-140S-MY3-HF	24	12	140	1440	120	3000	80/90	50	120
S08WXX-283540-024CV-140S-MY3-HF	24	12	140	1500	125	4000	80/90	50	120
S08WXX-283560-024CV-140S-MY3-HF	24	12	140	1440	120	6000	80/90	50	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

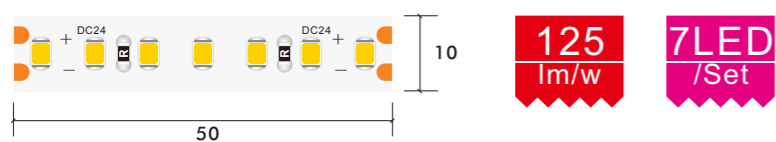


**24V DC 10mm 2835 140LED Single Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-283527-024CV-140S-MY3-HF	24	14.4	140	1584	110	2700	80/90	50	120
S10WXX-283530-024CV-140S-MY3-HF	24	14.4	140	1728	120	3000	80/90	50	120
S10WXX-283540-024CV-140S-MY3-HF	24	14.4	140	1800	125	4000	80/90	50	120
S10WXX-283560-024CV-140S-MY3-HF	24	14.4	140	1728	120	6000	80/90	50	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

HIGH EFFICACY STRIP LIGHT

2835 10MM 210LED WHITE

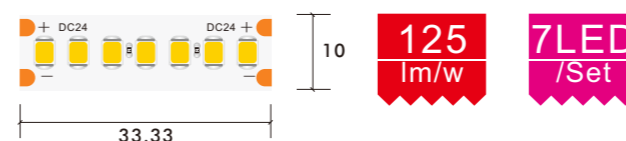

**24V DC 10mm 2835 210LED Single Color LED Strip**


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-283527-024CV-210S-MY3	24	18	210	1980	110	2700	80/90	33.3	120
S10WXX-283530-024CV-210S-MY3	24	18	210	2160	120	3000	80/90	33.3	120
S10WXX-283540-024CV-210S-MY3	24	18	210	2250	125	4000	80/90	33.3	120
S10WXX-283560-024CV-210S-MY3	24	18	210	2160	120	6000	80/90	33.3	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



HIGH EFFICACY STRIP LIGHT

2216 6MM 210LED WHITE

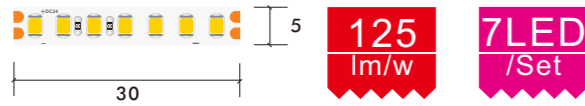

**24V DC 5mm 2216 210LED Single Color LED Strip**



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (°)
S05WXX-221627-024CV-210S-MY3-HF	24	6	210	1900	120	2700	80/90	33.33	120
S05WXX-221630-024CV-210S-MY3-HF	24	6	210	2000	120	3000	80/90	33.33	120
S05WXX-221640-024CV-210S-MY3-HF	24	6	210	2100	125	4000	80/90	33.33	120
S05WXX-221660-024CV-210S-MY3-HF	24	6	210	2000	125	6000	80/90	33.33	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



HIGH EFFICACY STRIP LIGHT


2835 6/8/10 MM 160LED WHITE

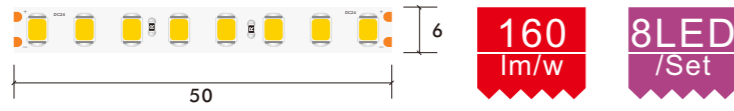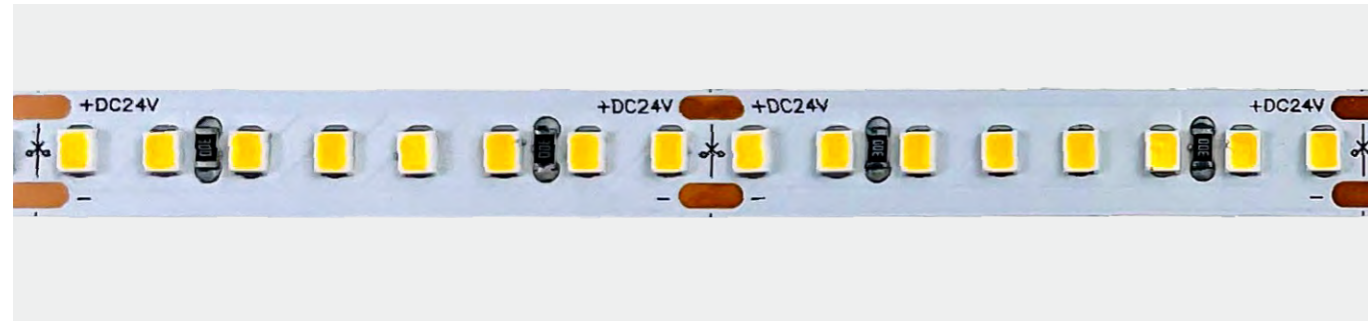

**24V DC 6mm 2835 160LED Single Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S06WXX-283527-024CV-160S-MY3-HF	24	6	870	1020	145	2700	80/90	50	120
S06WXX-283530-024CV-160S-MY3-HF	24	6	930	1080	155	3000	80/90	50	120
S06WXX-283540-024CV-160S-MY3-HF	24	6	960	1140	160	4000	80/90	50	120
S06WXX-283560-024CV-160S-MY3-HF	24	6	930	1080	155	6000	80/90	50	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

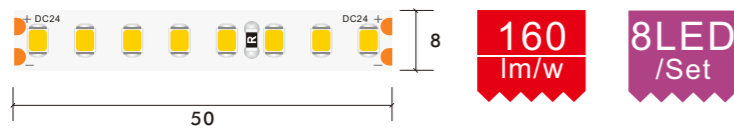


**24V DC 8mm 2835 160LED Single Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-283527-024CV-160S-MY3-HF	24	12	160	1740	145	2700	80/90	50	120
S08WXX-283530-024CV-160S-MY3-HF	24	12	160	1860	155	3000	80/90	50	120
S08WXX-283540-024CV-160S-MY3-HF	24	12	160	1920	160	4000	80/90	50	120
S08WXX-283560-024CV-160S-MY3-HF	24	12	160	1860	155	6000	80/90	50	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

HIGH EFFICACY STRIP LIGHT

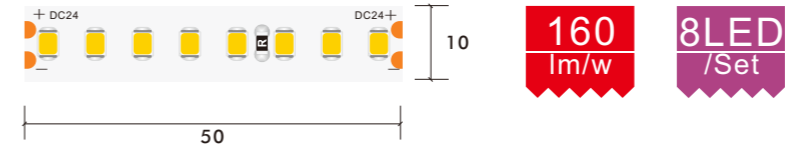


**10mm 2835 160LED Single Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-283527-024CV-160S-MY3-HF	24	14.4	160	2088	145	2700	80/90	50	120
S10WXX-283530-024CV-160S-MY3-HF	24	14.4	160	2232	155	3000	80/90	50	120
S10WXX-283540-024CV-160S-MY3-HF	24	14.4	160	2304	160	4000	80/90	50	120
S10WXX-283560-024CV-160S-MY3-HF	24	14.4	160	2232	155	6000	80/90	50	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 8 MM 128LED WHITE

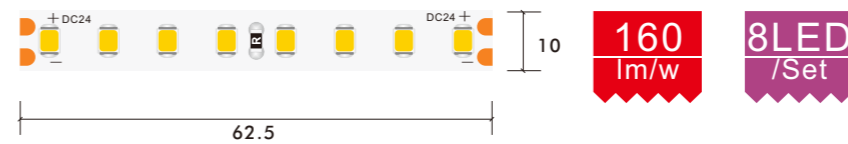



**8mm 2835 128 LED Single Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-283527-024CV-128S-MY3-HF	24	9.6	128	1392	145	2700	80/90	62.5	120
S08WXX-283530-024CV-128S-MY3-HF	24	9.6	128	1488	155	3000	80/90	62.5	120
S08WXX-283540-024CV-128S-MY3-HF	24	9.6	128	1536	160	4000	80/90	62.5	120
S08WXX-283560-024CV-128S-MY3-HF	24	9.6	128	1488	155	6000	80/90	62.5	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

HIGH EFFICACY STRIP LIGHT

2835 10 MM 240LED WHITE

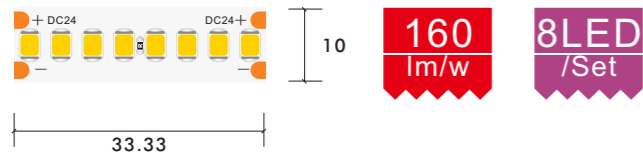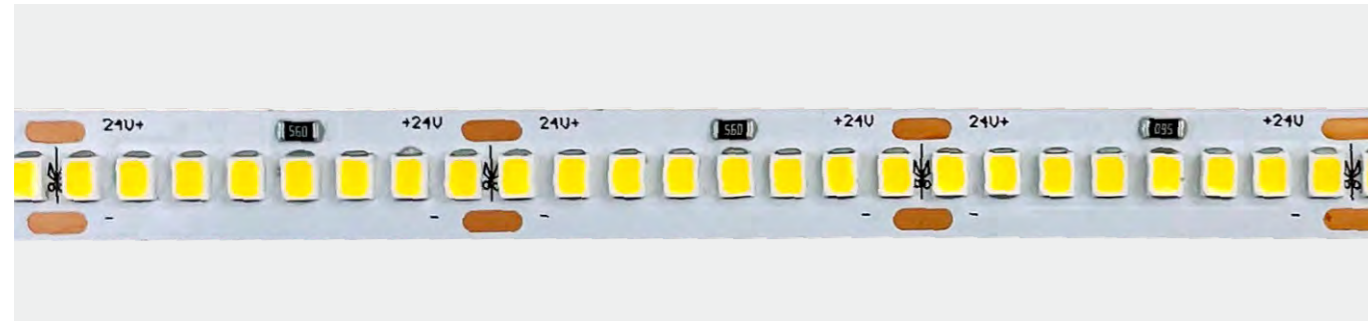



**24V DC 10mm 2835 240LED Single Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-283527-024CV-240S-MY3-HF	24	20	240	2900	145	2700	80/90	33.3	120
S10WXX-283530-024CV-240S-MY3-HF	24	20	240	3100	155	3000	80/90	33.3	120
S10WXX-283540-024CV-240S-MY3-HF	24	20	240	3200	160	4000	80/90	33.3	120
S10WXX-283560-024CV-240S-MY3-HF	24	20	240	3100	155	6000	80/90	33.3	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

HIGH EFFICACY STRIP LIGHT

2835 10 MM 180LED WHITE

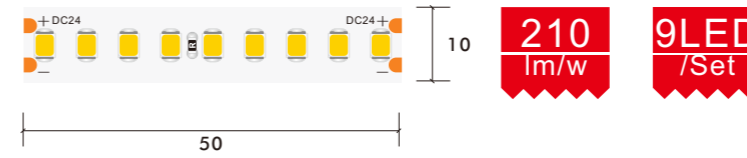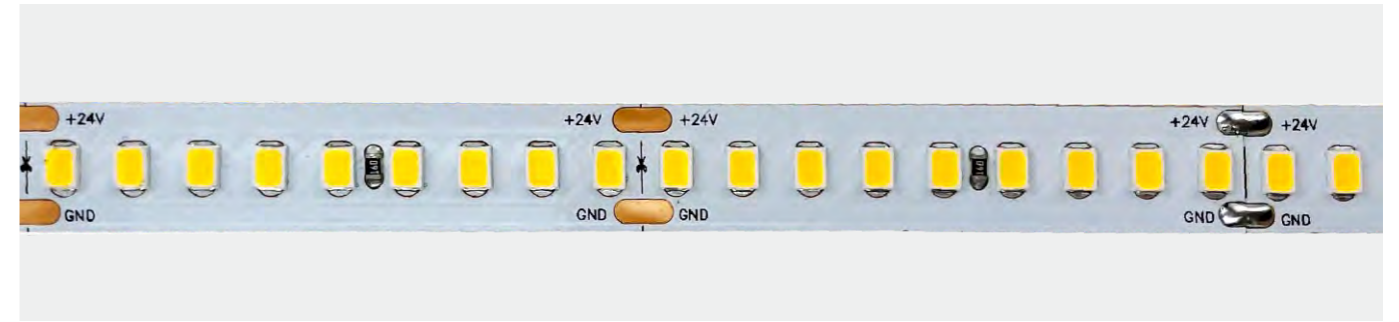

**24V DC 10mm 2835 180LED Single Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-283527-024CV-180S-MY3-HF	24	8.6	180	1900	190	2700	80/90	50	120
S10WXX-283530-024CV-180S-MY3-HF	24	8.6	180	2000	200	3000	80/90	50	120
S10WXX-283540-024CV-180S-MY3-HF	24	8.6	180	2100	210	4000	80/90	50	120
S10WXX-283560-024CV-180S-MY3-HF	24	8.6	180	2000	200	6000	80/90	50	120


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



# LONG RUN STRIP LIGHT



2835 120LED WHITE ULTRA LONG STRIP

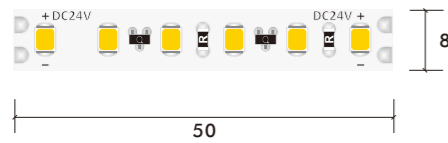


20 M  
24V




Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-283527-024CC-120S-MY3-L20	24	9	120	720	80	2700	80/90	50	120
S08WXX-283530-024CC-120S-MY3-L20	24	9	120	765	85	3000	80/90	50	120
S08WXX-283540-024CC-120S-MY3-L20	24	9	120	810	90	4000	80/90	50	120
S08WXX-283560-024CC-120S-MY3-L20	24	9	120	765	85	6000	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

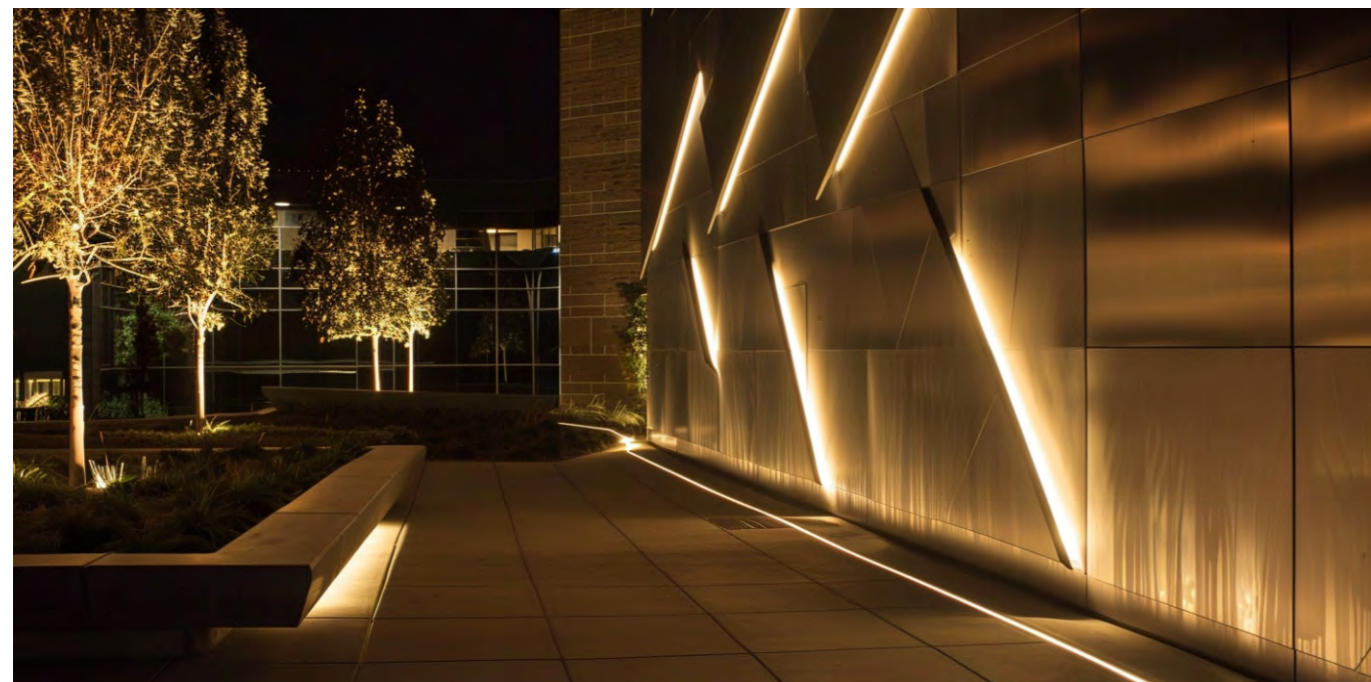

2835 120LED WHITE ULTRA LONG STRIP

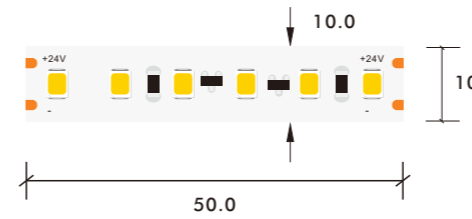

15 M  
24V





Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-283527-024CC-120S-MY3-L20	24	9	120	720	80	2700	80/90	50	120
S10WXX-283530-024CC-120S-MY3-L20	24	9	120	765	85	3000	80/90	50	120
S10WXX-283540-024CC-120S-MY3-L20	24	9	120	810	90	4000	80/90	50	120
S10WXX-283560-024CC-120S-MY3-L20	24	9	120	765	85	6000	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




5050 CCT Tunable Constant current

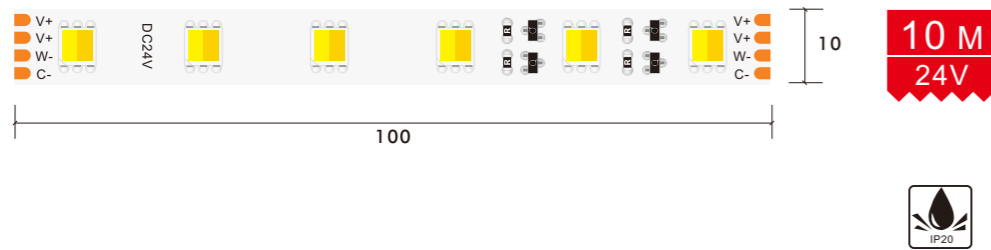
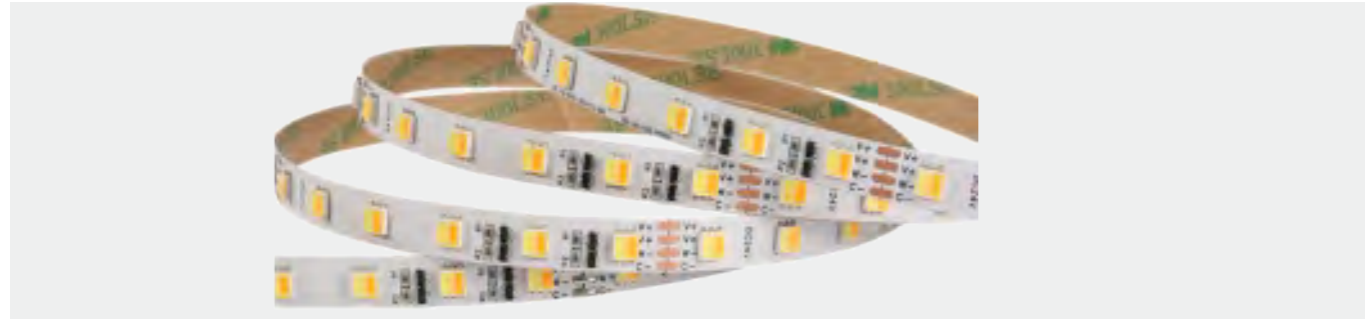


24V DC 10mm 5050 60LED CCT Tunable Ultra Long LED Strip									
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-5050TW-024CC-060S-MY3-L10	24	10	60	950	95	CCT	80/90	100	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

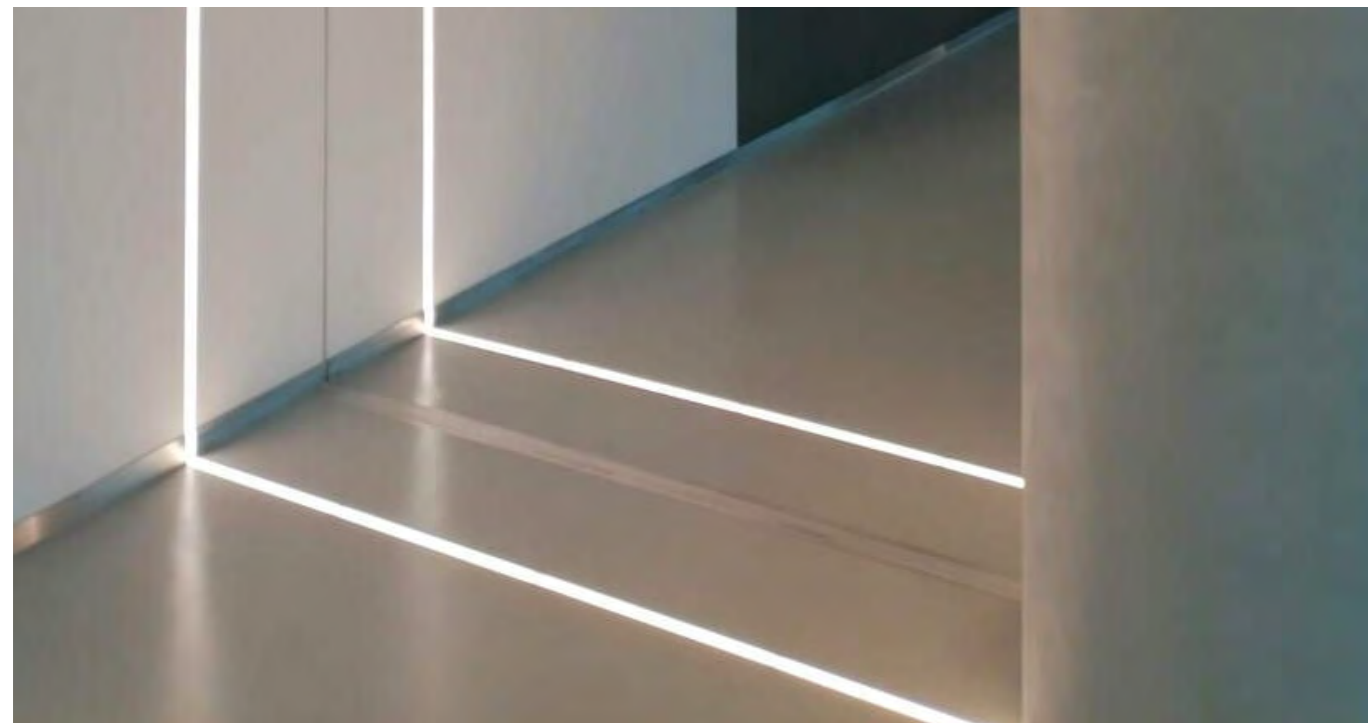


5050 RGB ULTRA LONG STRIP

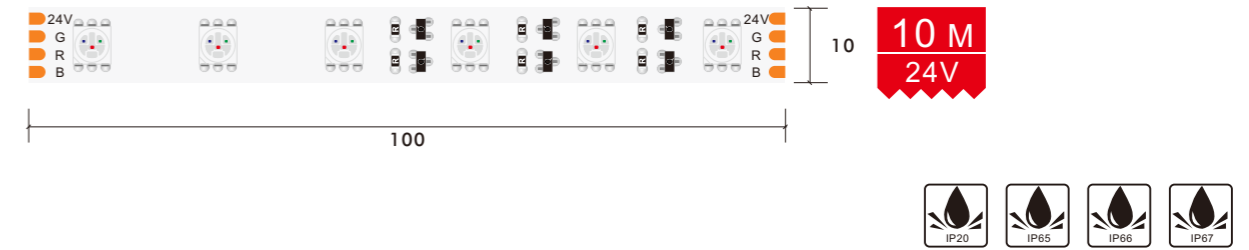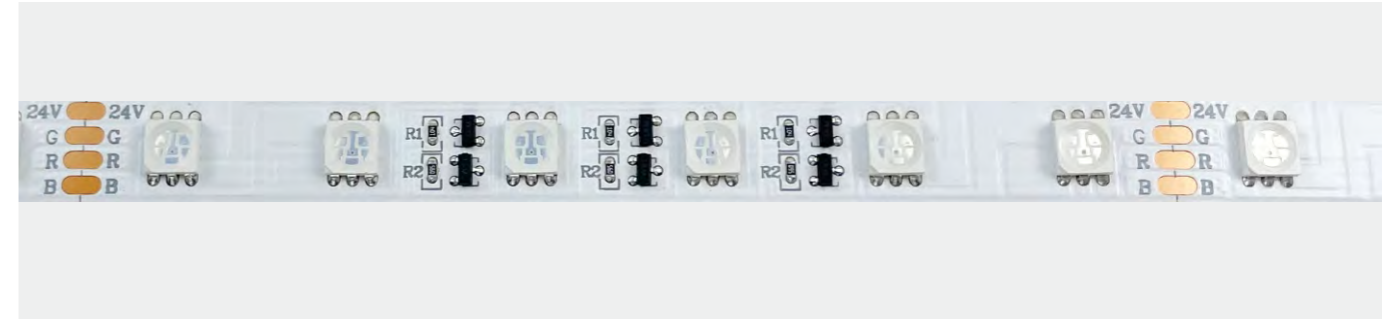


24V DC 10mm 5050 60LED RGB 10M Ultra Long LED Strip									
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-5050TC-024CC-060S-MY3-L10	24	8	60	N/A	N/A	RGB	80/90	100	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

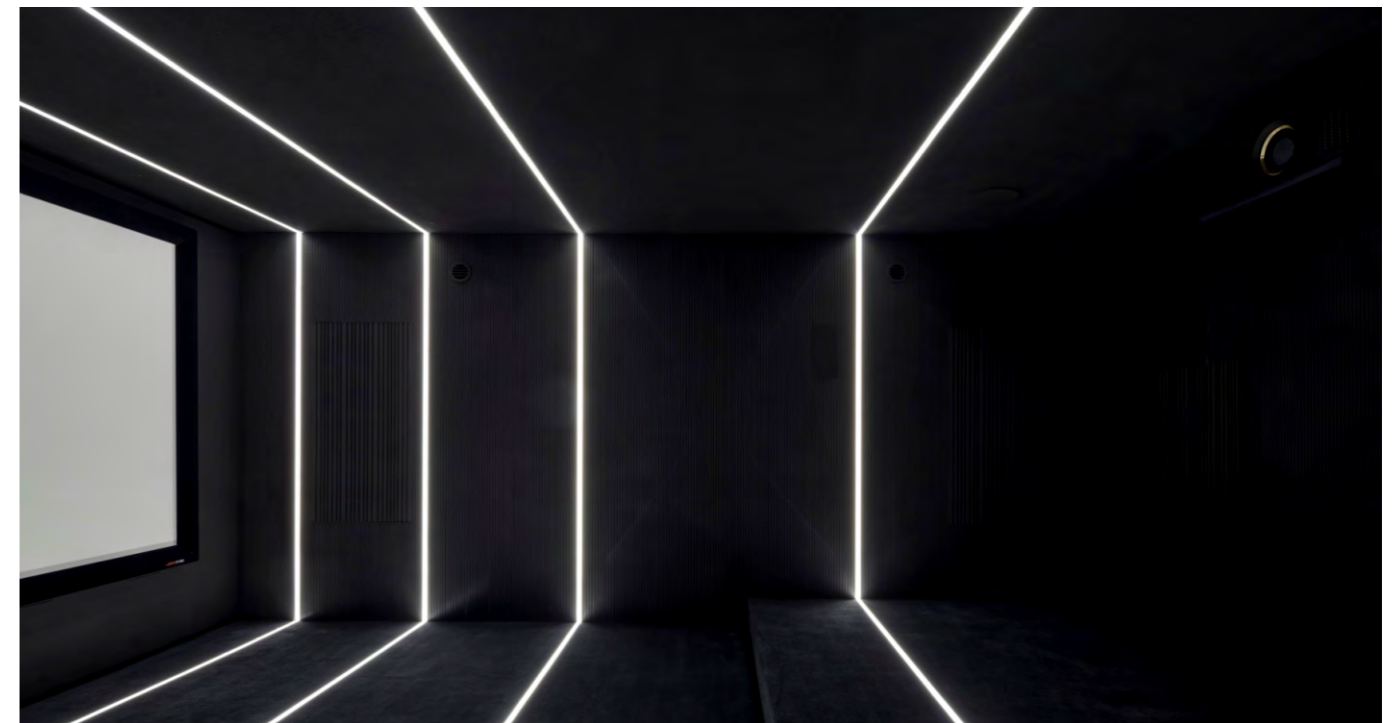

5050 RGBW ULTRA LONG STRIP

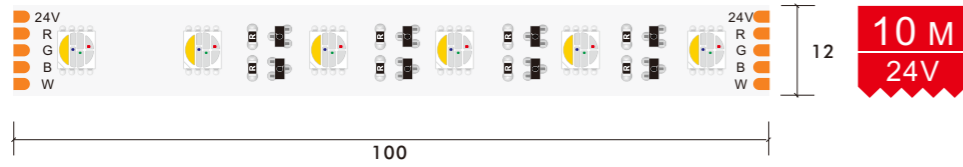


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12WXX-5050MC-024CC-060S-MY3-L10	24	12	60	N/A	N/A	RGBW	80/90	100	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. It is different with IP65, IP66, IP67, IP68





# 48V STRIP LIGHT

48V LED STRIP

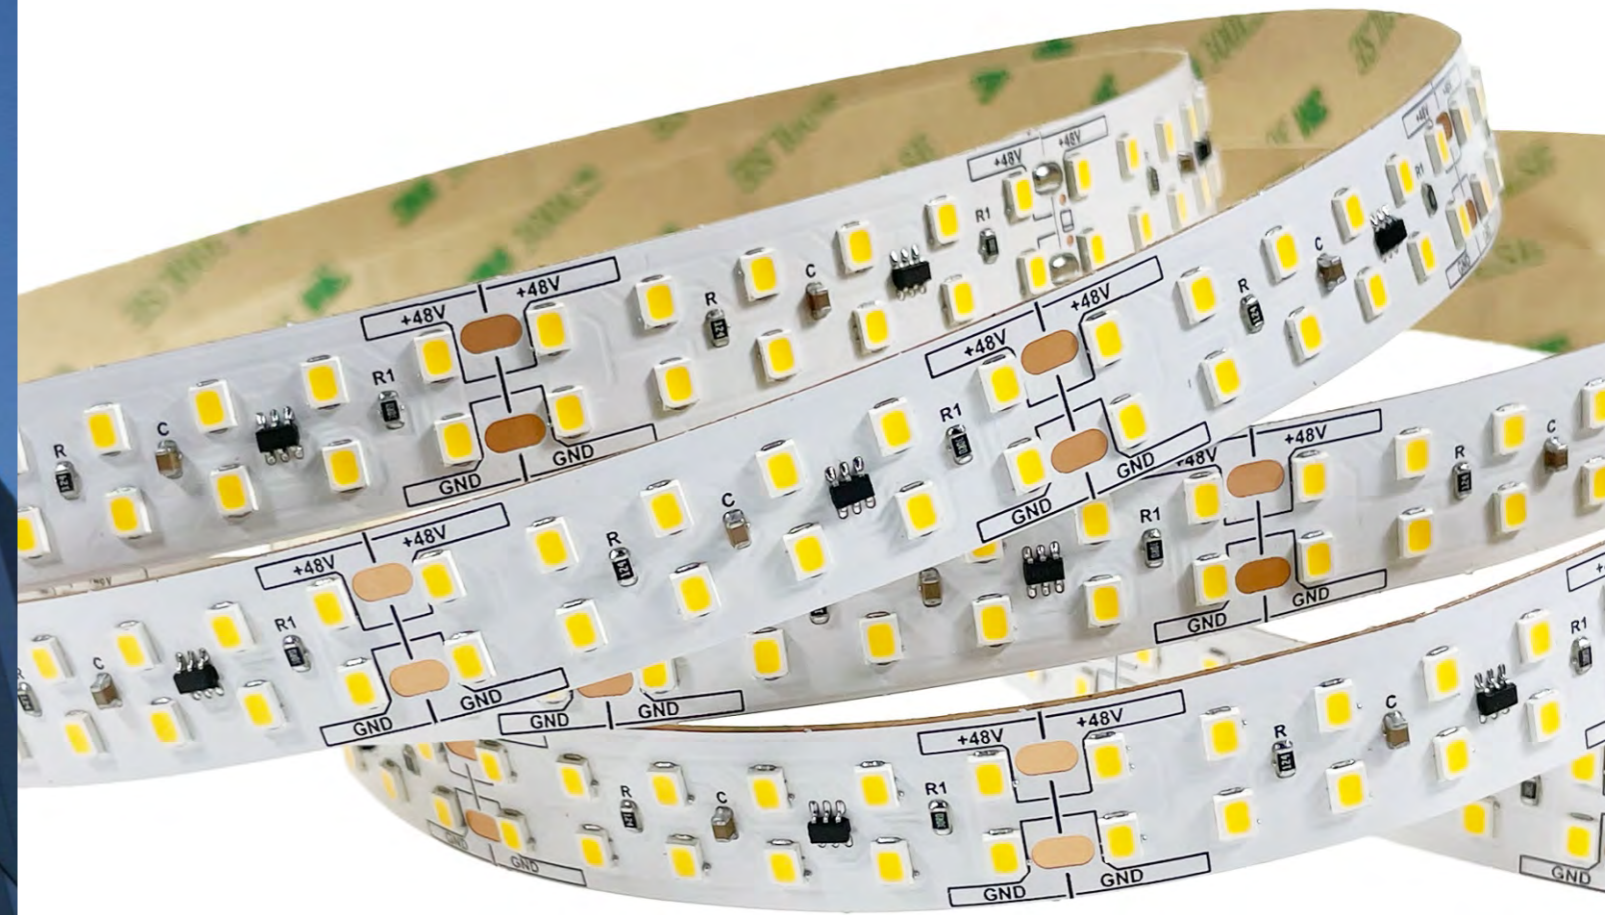

2835 15 MM 240LED WHITE

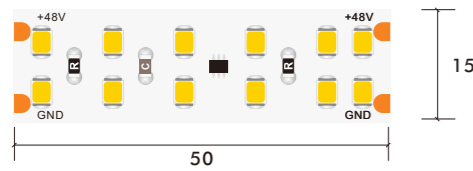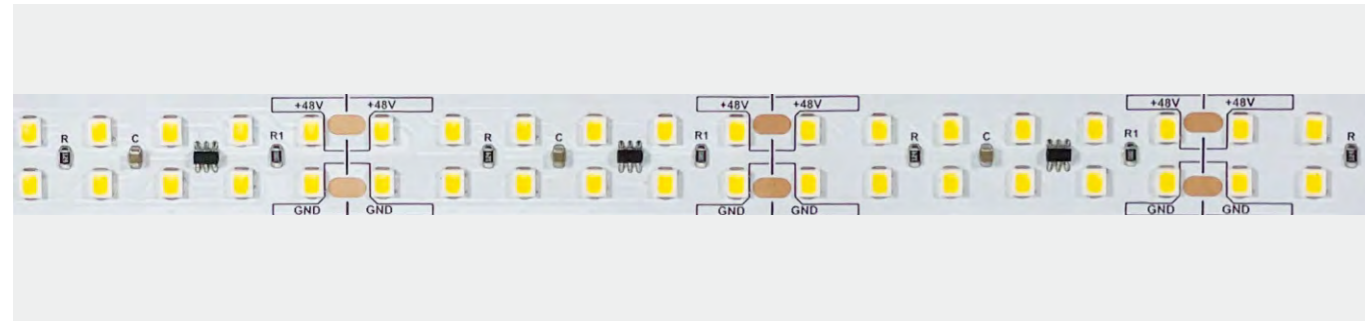

48V DC 48V 15mm 2835 240LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
S15WXX-283527-048CV-240S-MY3	48	12	240	1520	80	2700	80/90	50	120	
S15WXX-283530-048CV-240S-MY3	48	12	240	1615	85	3000	80/90	50	120	
S15WXX-283540-048CV-240S-MY3	48	12	240	1805	95	4000	80/90	50	120	
S15WXX-283560-048CV-240S-MY3	48	12	240	1786	94	6000	80/90	50	120	

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 8 MM 120LED WHITE





48V DC 48V 8mm 2835 120LED Single Color LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
S08WXX-283527-048CV-120S-MY3	48	10	120	850	85	2700	80/90	100	120	
S08WXX-283530-048CV-120S-MY3	48	10	120	900	90	3000	80/90	100	120	
S08WXX-283540-048CV-120S-MY3	48	10	120	950	95	4000	80/90	100	120	
S08WXX-283560-048CV-120S-MY3	48	10	120	910	91	6000	80/90	100	120	

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




2835 10 MM 120LED WHITE

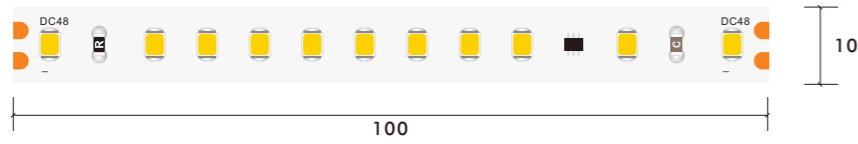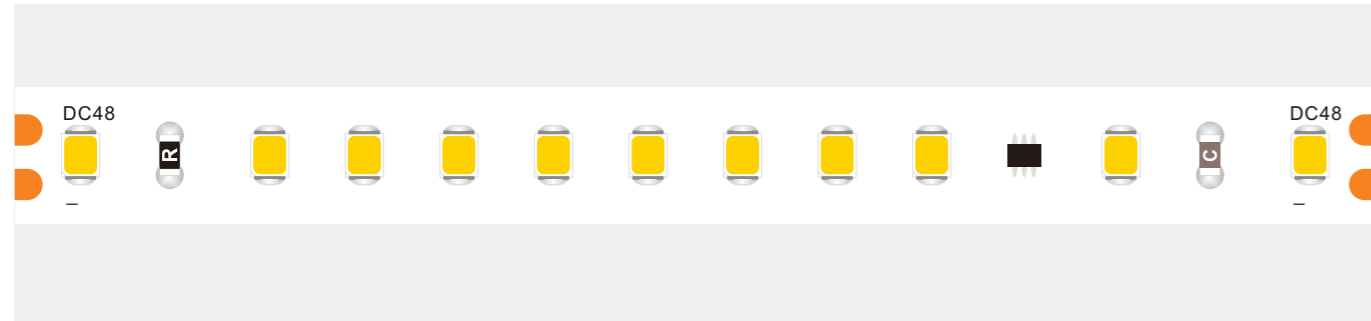

48V DC 48V 10mm 2835 120LED Single Color LED Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-283527-048CV-120S-MY3	48	10	120	850	85	2700	80/90	100	120
S10WXX-283530-048CV-120S-MY3	48	10	120	900	90	3000	80/90	100	120
S10WXX-283540-048CV-120S-MY3	48	10	120	950	95	4000	80/90	100	120
S10WXX-283560-048CV-120S-MY3	48	10	120	910	91	6000	80/90	100	120


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

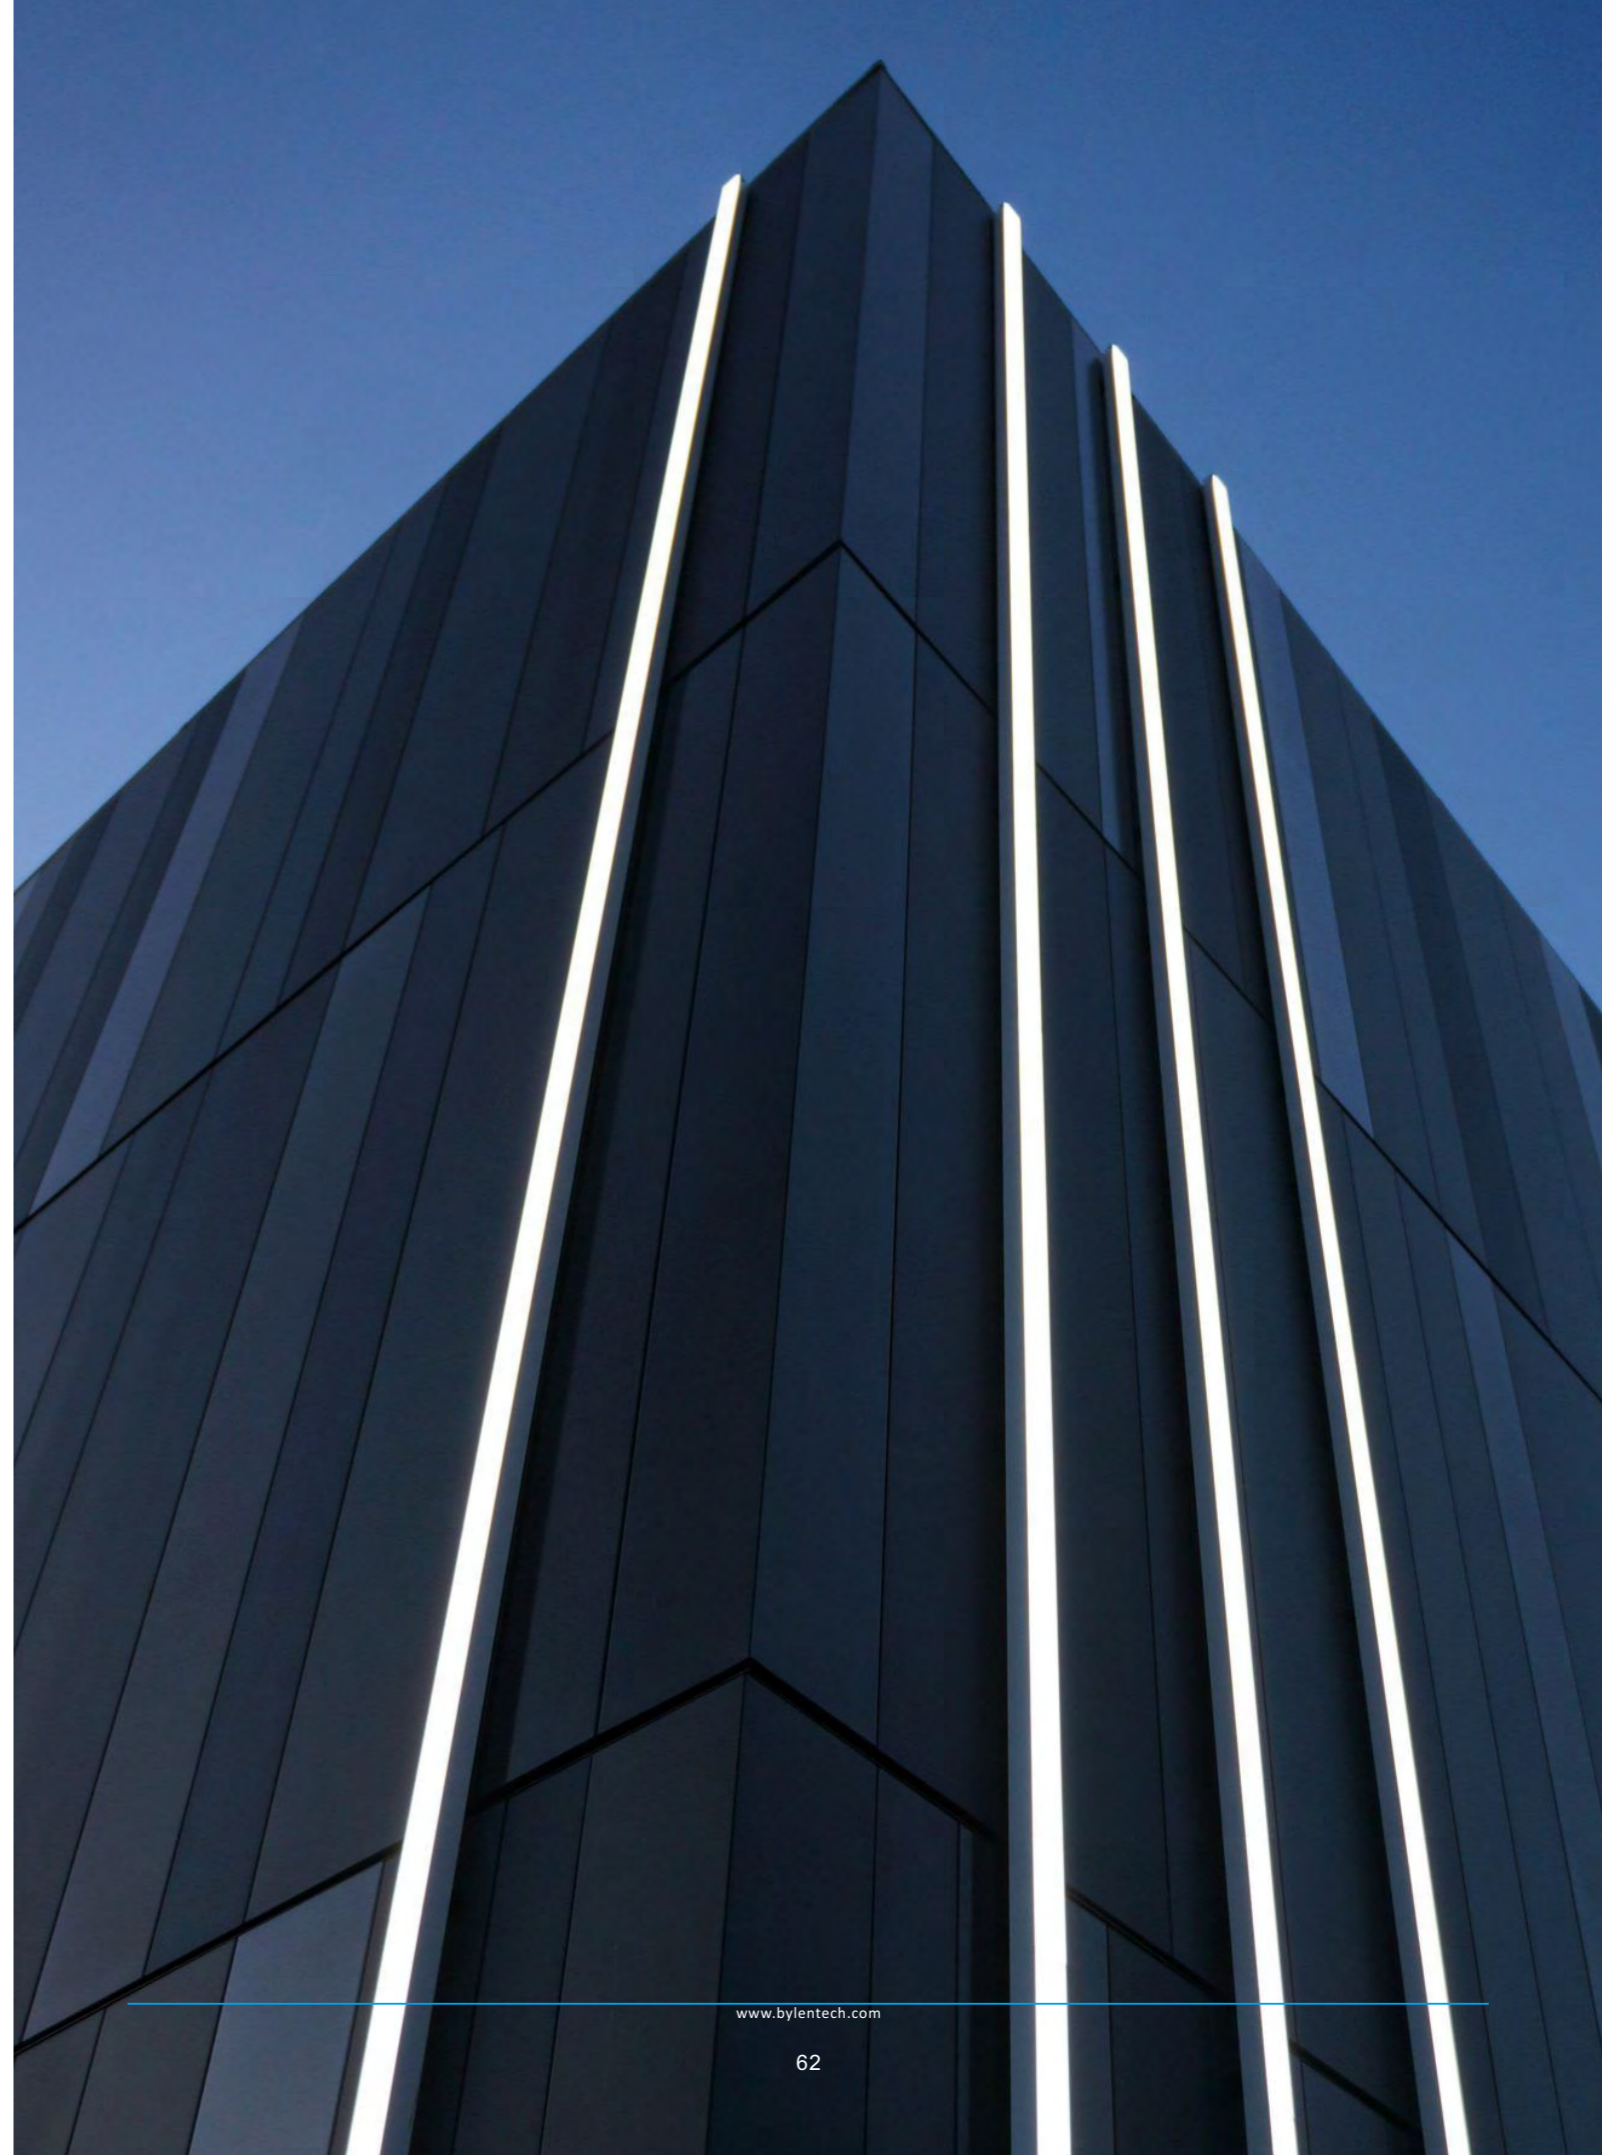



# MINI CUT STRIP LIGHT



From 8.3 to 16.7mm

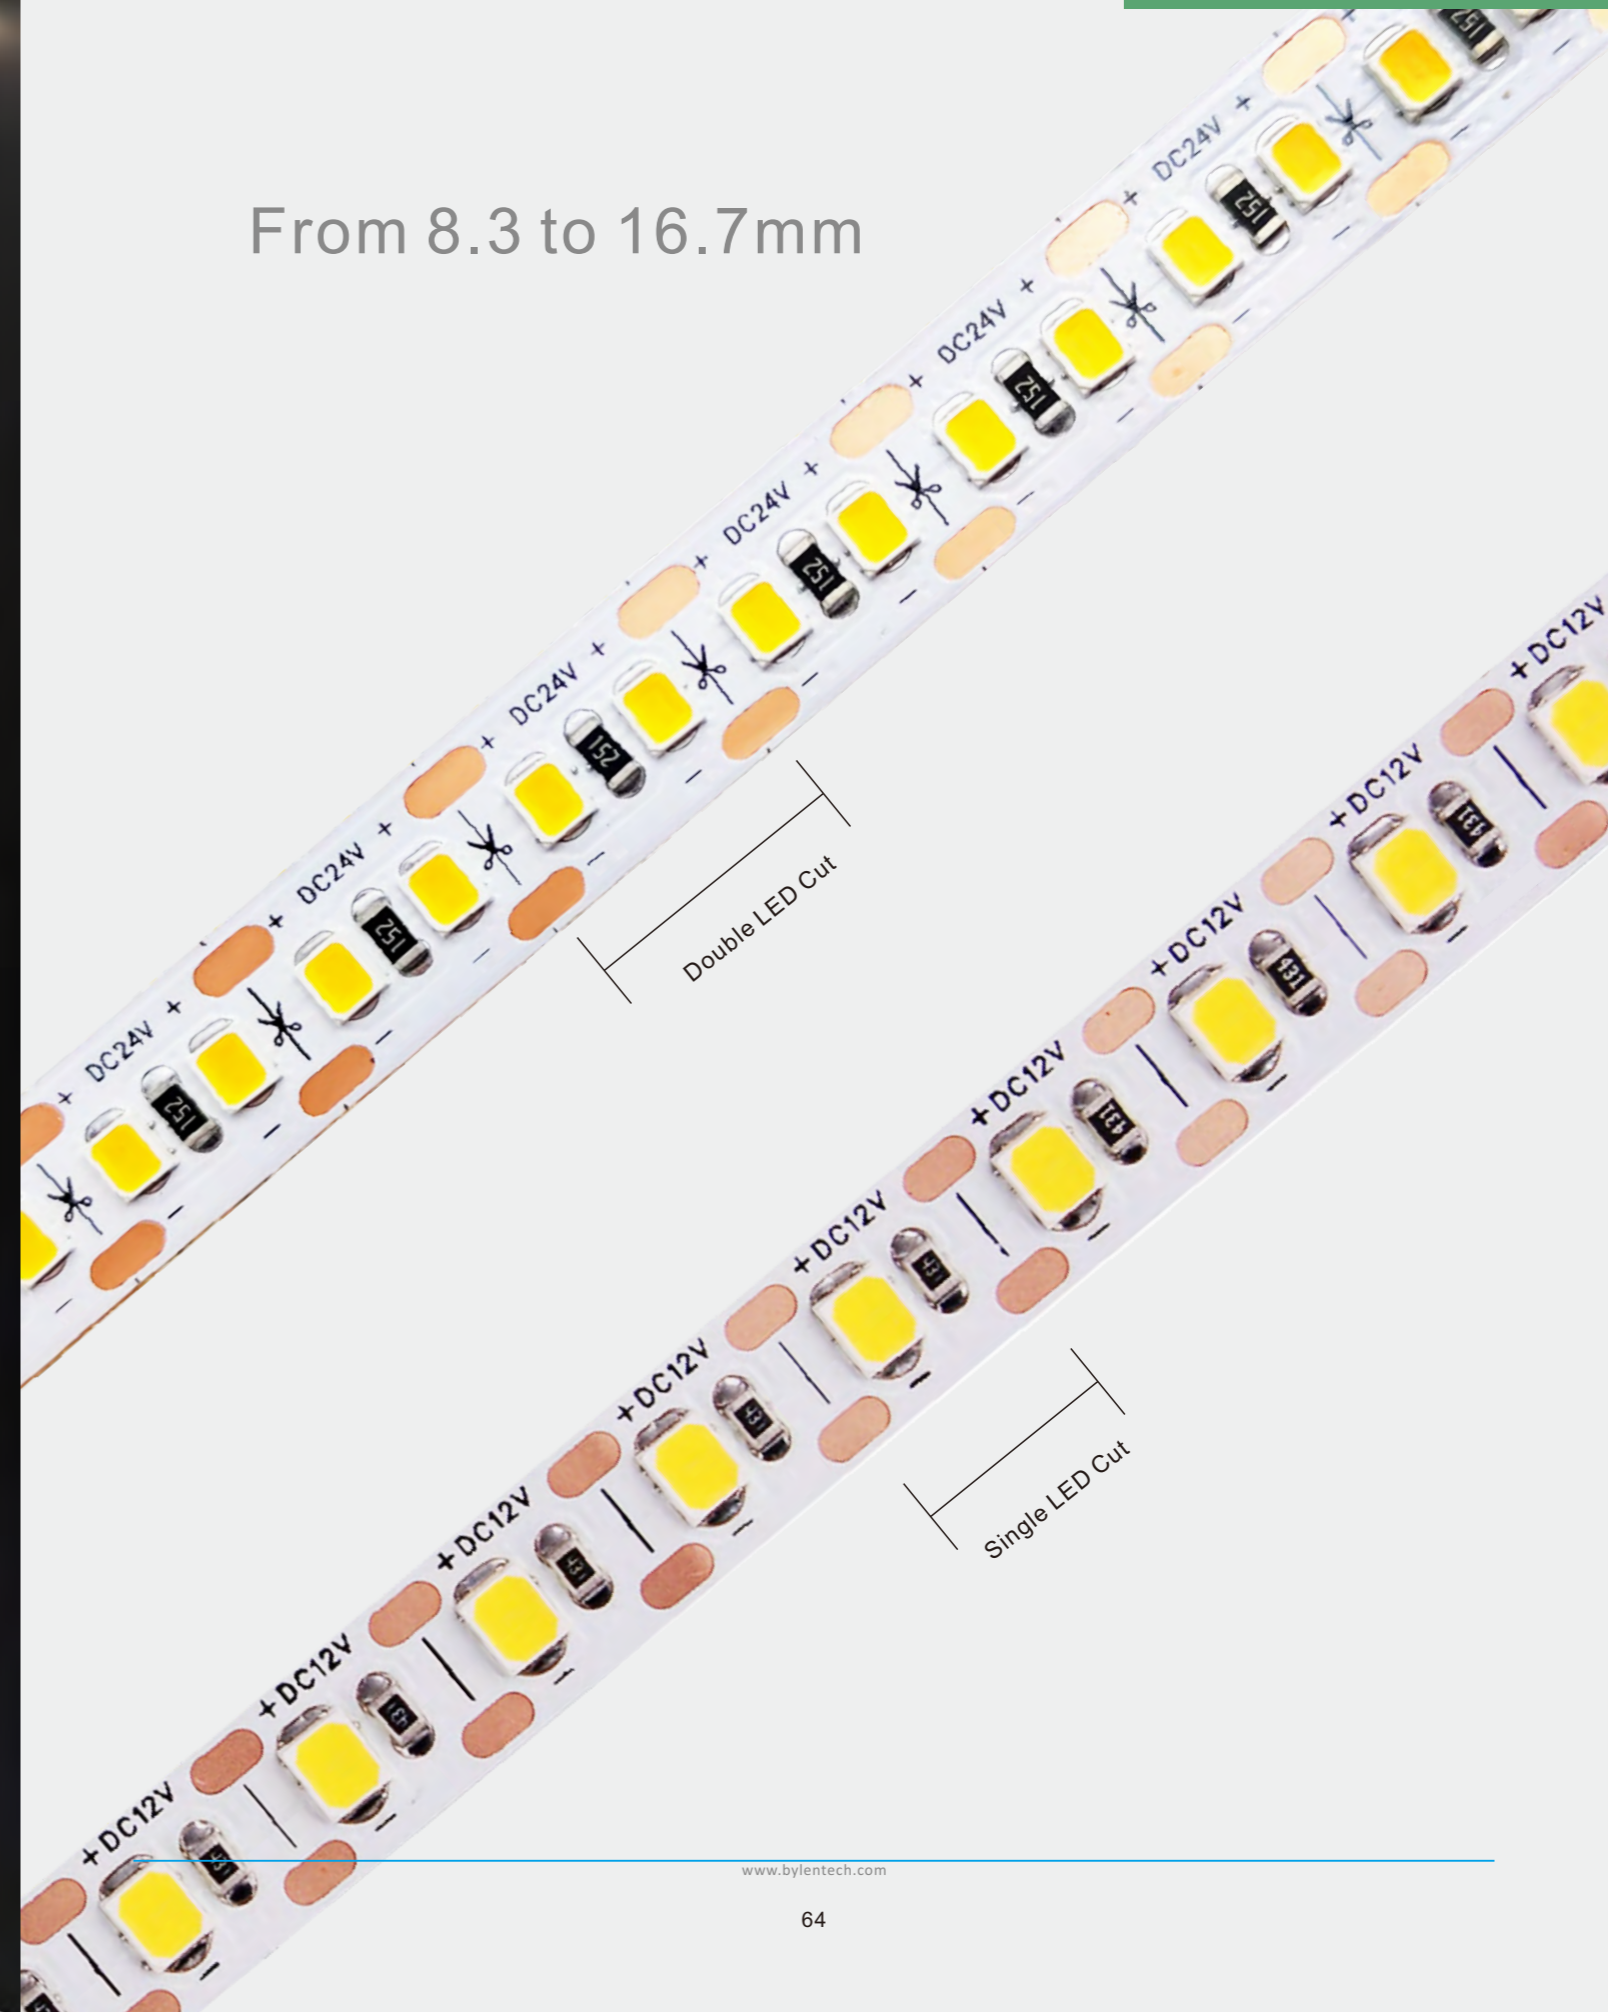


MINI CUT LED STRIP ( SINGLE LED CUT)

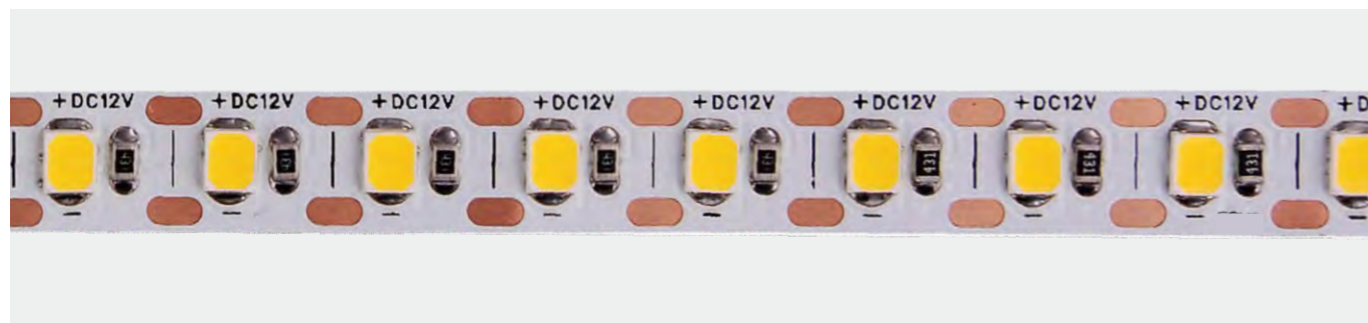

**24V DC 5mm 2835 120LED Single Color Mini Cut LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S05WXX-283527-024CV-120S-MY3-MC1	24	6	120	480	80	2700	80/90	8.33	120
S05WXX-283530-024CV-120S-MY3-MC1	24	6	120	510	85	3000	80/90	8.33	120
S05WXX-283540-024CV-120S-MY3-MC1	24	6	120	540	90	4000	80/90	8.33	120
S05WXX-283560-024CV-120S-MY3-MC1	24	6	120	510	85	6000	80/90	8.33	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



**24V DC 8mm 2835 120LED Single Color Mini Cut LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-283527-024CV-120S-MY3-MC1	24	9.6	120	768	80	2700	80/90	8.33	120
S08WXX-283530-024CV-120S-MY3-MC1	24	9.6	120	816	85	3000	80/90	8.33	120
S08WXX-283540-024CV-120S-MY3-MC1	24	9.6	120	864	90	4000	80/90	8.33	120
S08WXX-283560-024CV-120S-MY3-MC1	24	9.6	120	816	85	6000	80/90	8.33	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

MINI CUT LED STRIP ( DOUBLE LEDS CUT)





**24V DC 6mm 2835 160LED Single Color Mini Cut LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S06WXX-283527-024CV-160S-MY3-MC2	24	6	160	480	80	2700	80/90	12.5	120
S06WXX-283530-024CV-160S-MY3-MC2	24	6	160	510	85	3000	80/90	12.5	120
S06WXX-283540-024CV-160S-MY3-MC2	24	6	160	540	90	4000	80/90	12.5	120
S06WXX-283560-024CV-160S-MY3-MC2	24	6	160	510	85	6000	80/90	12.5	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




MINI CUT LED STRIP ( DOUBLE LEDS CUT)

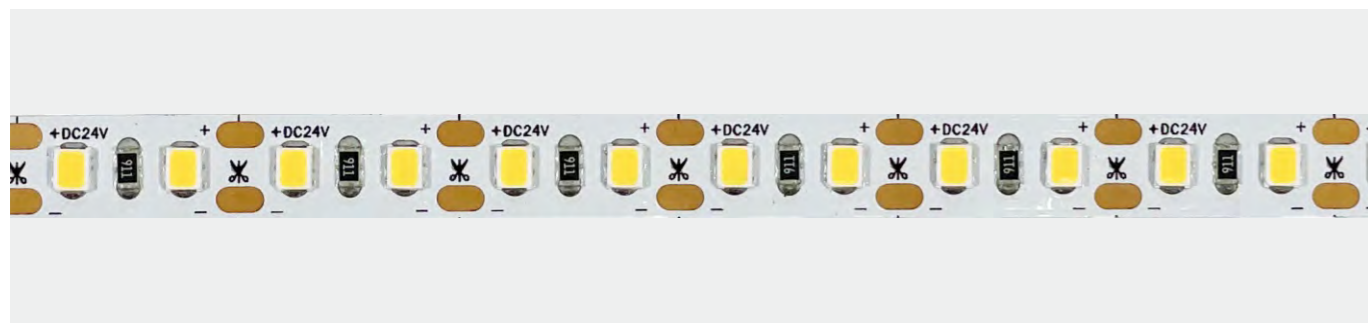

24V DC 8mm 2835 120LED Single Color Mini Cut LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
S08WXX-283527-024CV-120S-MY3-MC2	24	12	120	960	80	2700	80/90	16.67	120	
S08WXX-283530-024CV-120S-MY3-MC2	24	12	120	1020	85	3000	80/90	16.67	120	
S08WXX-283540-024CV-120S-MY3-MC2	24	12	120	1080	90	4000	80/90	16.67	120	
S08WXX-283560-024CV-120S-MY3-MC2	24	12	120	1020	85	6000	80/90	16.67	120	


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under Ip20. it is different with IP65, IP66, IP67, IP68

MINI CUT LED STRIP ( DOUBLE LEDS CUT)




24V DC 10mm 2835 168LED Single Color Mini Cut LED Strip										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
S10WXX-283527-024CV-168S-MY3-MC2	24	16.8	168	1344	80	2700	80/90	11.9	120	
S10WXX-283530-024CV-168S-MY3-MC2	24	16.8	168	1428	85	3000	80/90	11.9	120	
S10WXX-283540-024CV-168S-MY3-MC2	24	16.8	168	1512	90	4000	80/90	11.9	120	
S10WXX-283560-024CV-168S-MY3-MC2	24	16.8	168	1428	85	6000	80/90	11.9	120	



\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

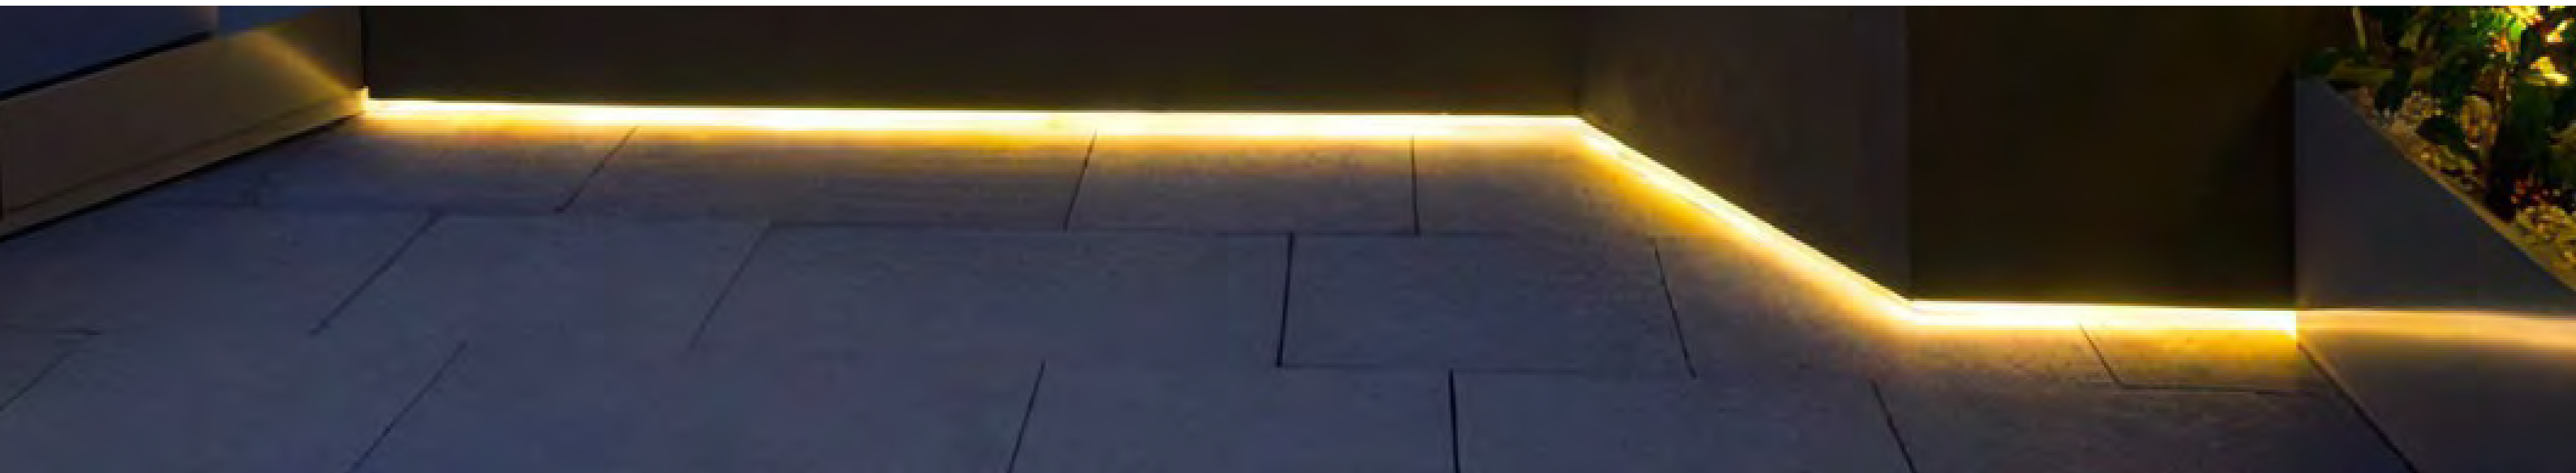

# Tunable CCT STRIP LIGHT

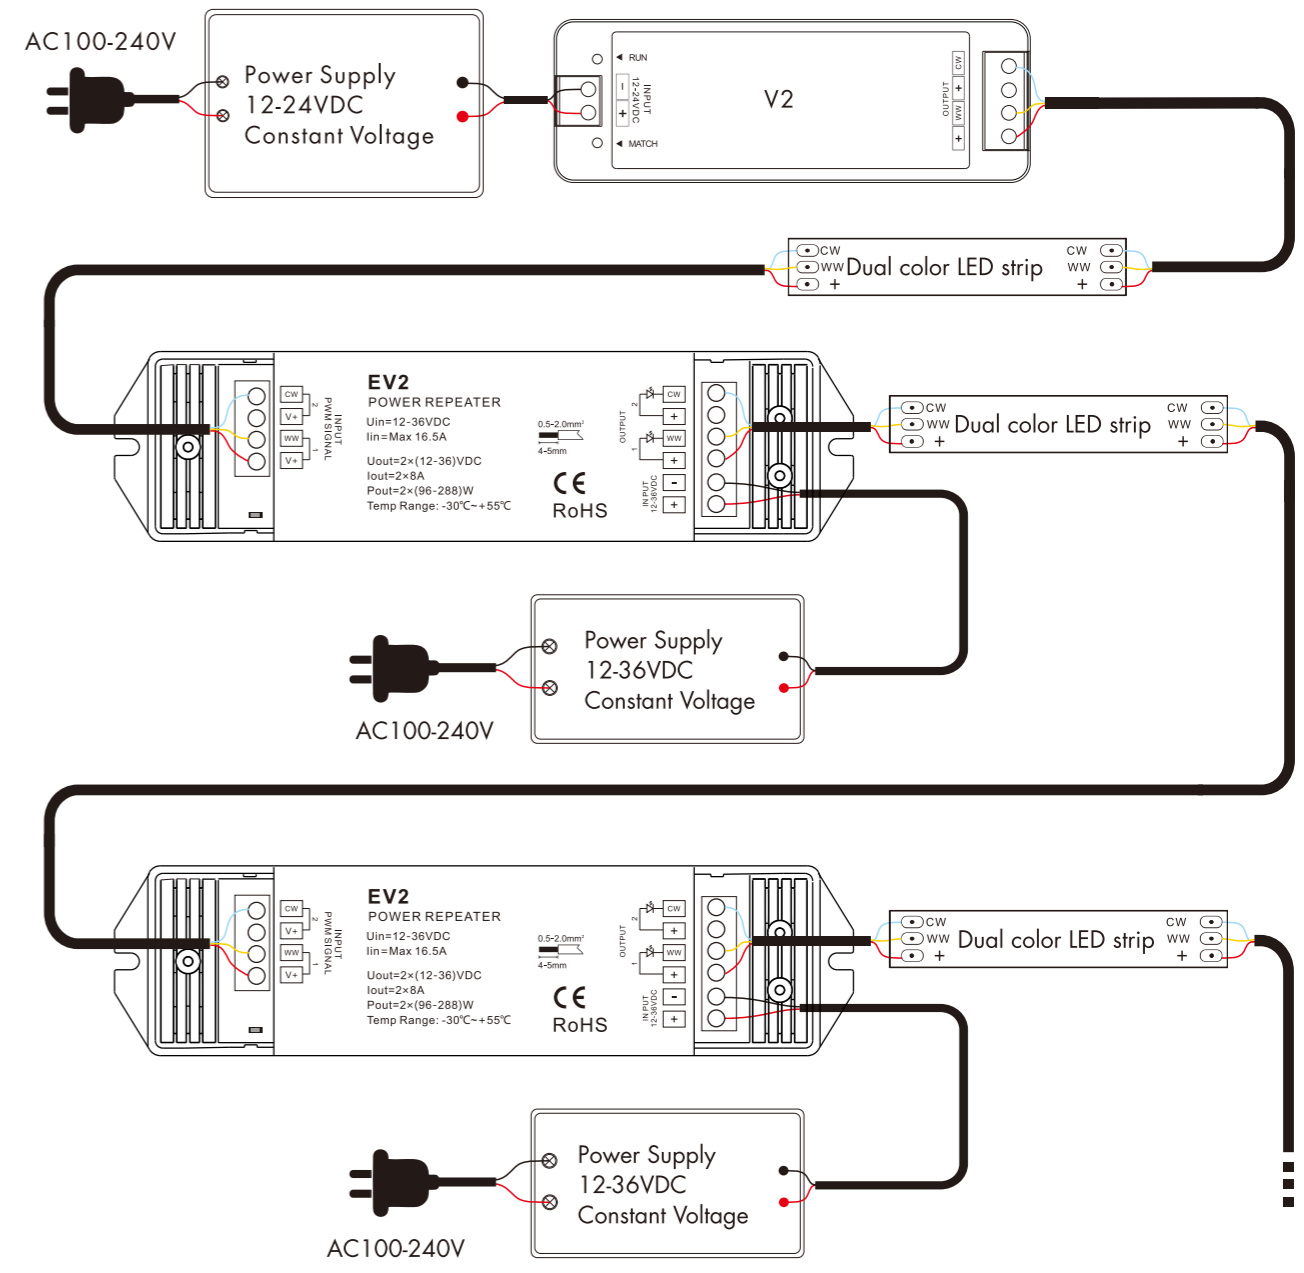


2835 8mm CCT LED Strip

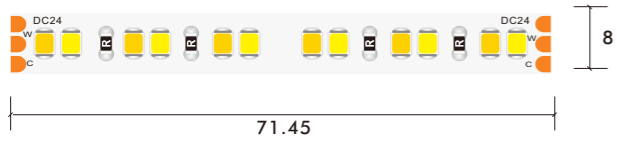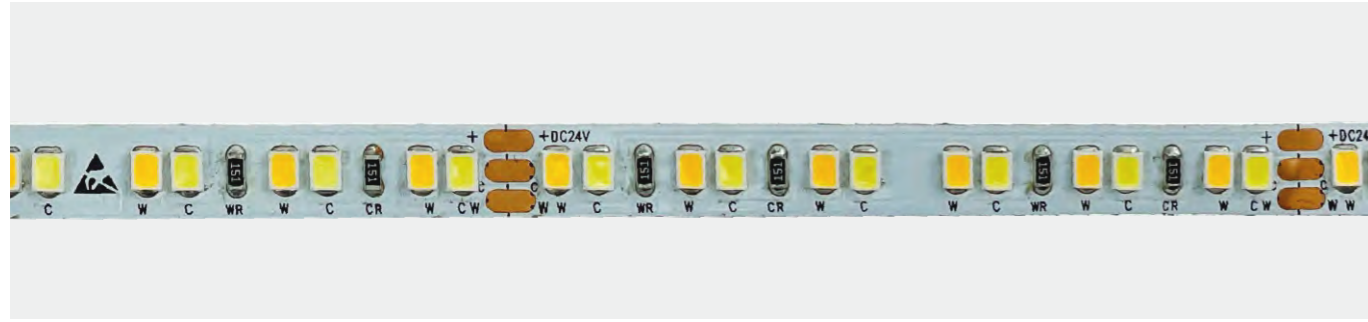

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-2835TW-024CV-168S-MY3	24	14.4	168	1152	80	CCT	80/90	71.4	120


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2216 8 / 10 MM 240LED CCT LED Strip

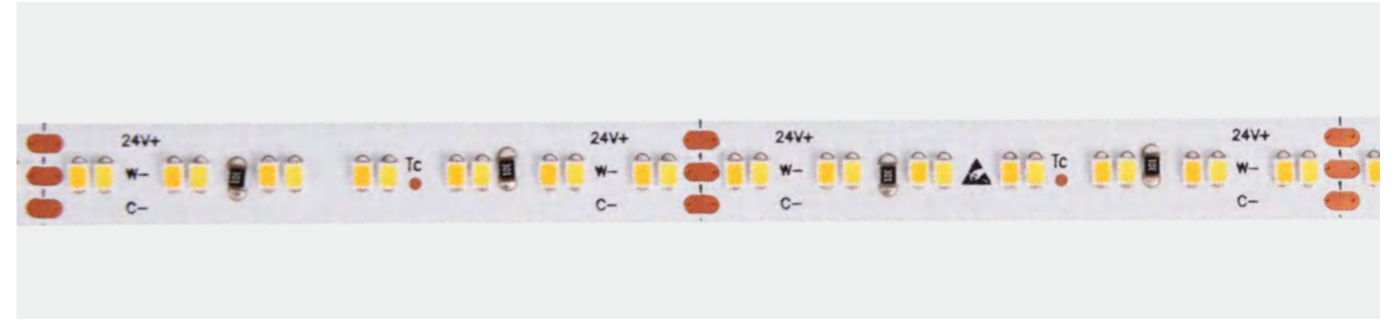

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-2835TW-024CV-240S-MY3	24	14.4	240	1152	80	CCT	90	50	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

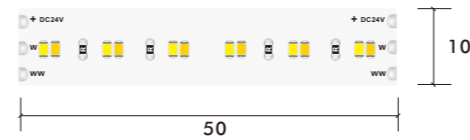

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-2216TW-024CV-240S-MY3	24	16.8	240	1344	80	CCT	90	50	120


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

# DIM TO WARM LED STRIP




## DIM TO WARM LED STRIP

### 2216 10 MM 224LED DIM TO WARM LED Strip

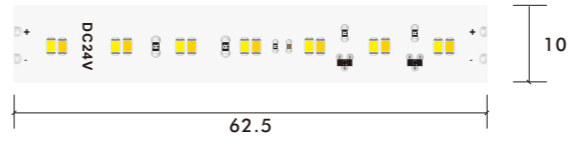


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10W20-221618-024CV-224S-MY3-DTW	24	15	224	1150	85	1800K-3000K	90	62.5	120
S10W20-221630-024CV-224S-MY3-DTW	24	15	224	1350	90	3000K-6000K	90	62.5	120



\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

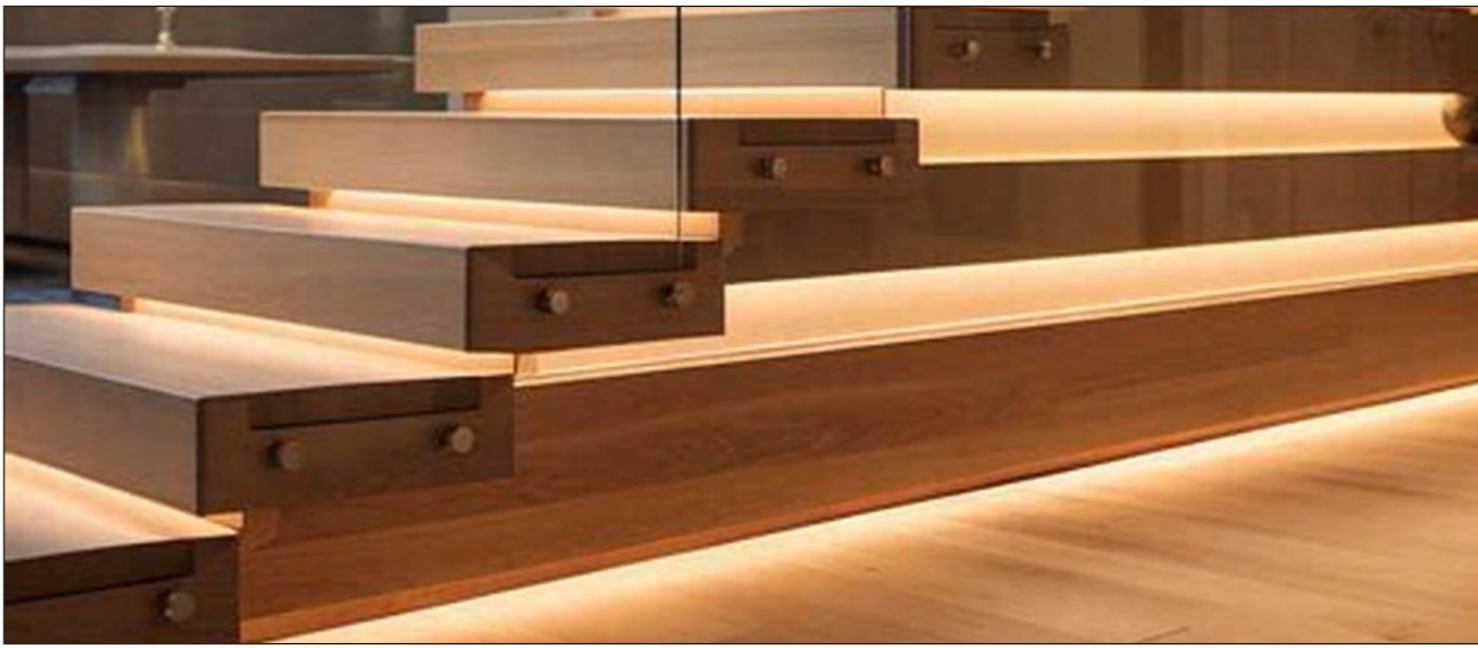

# RGB STRIP LIGHT

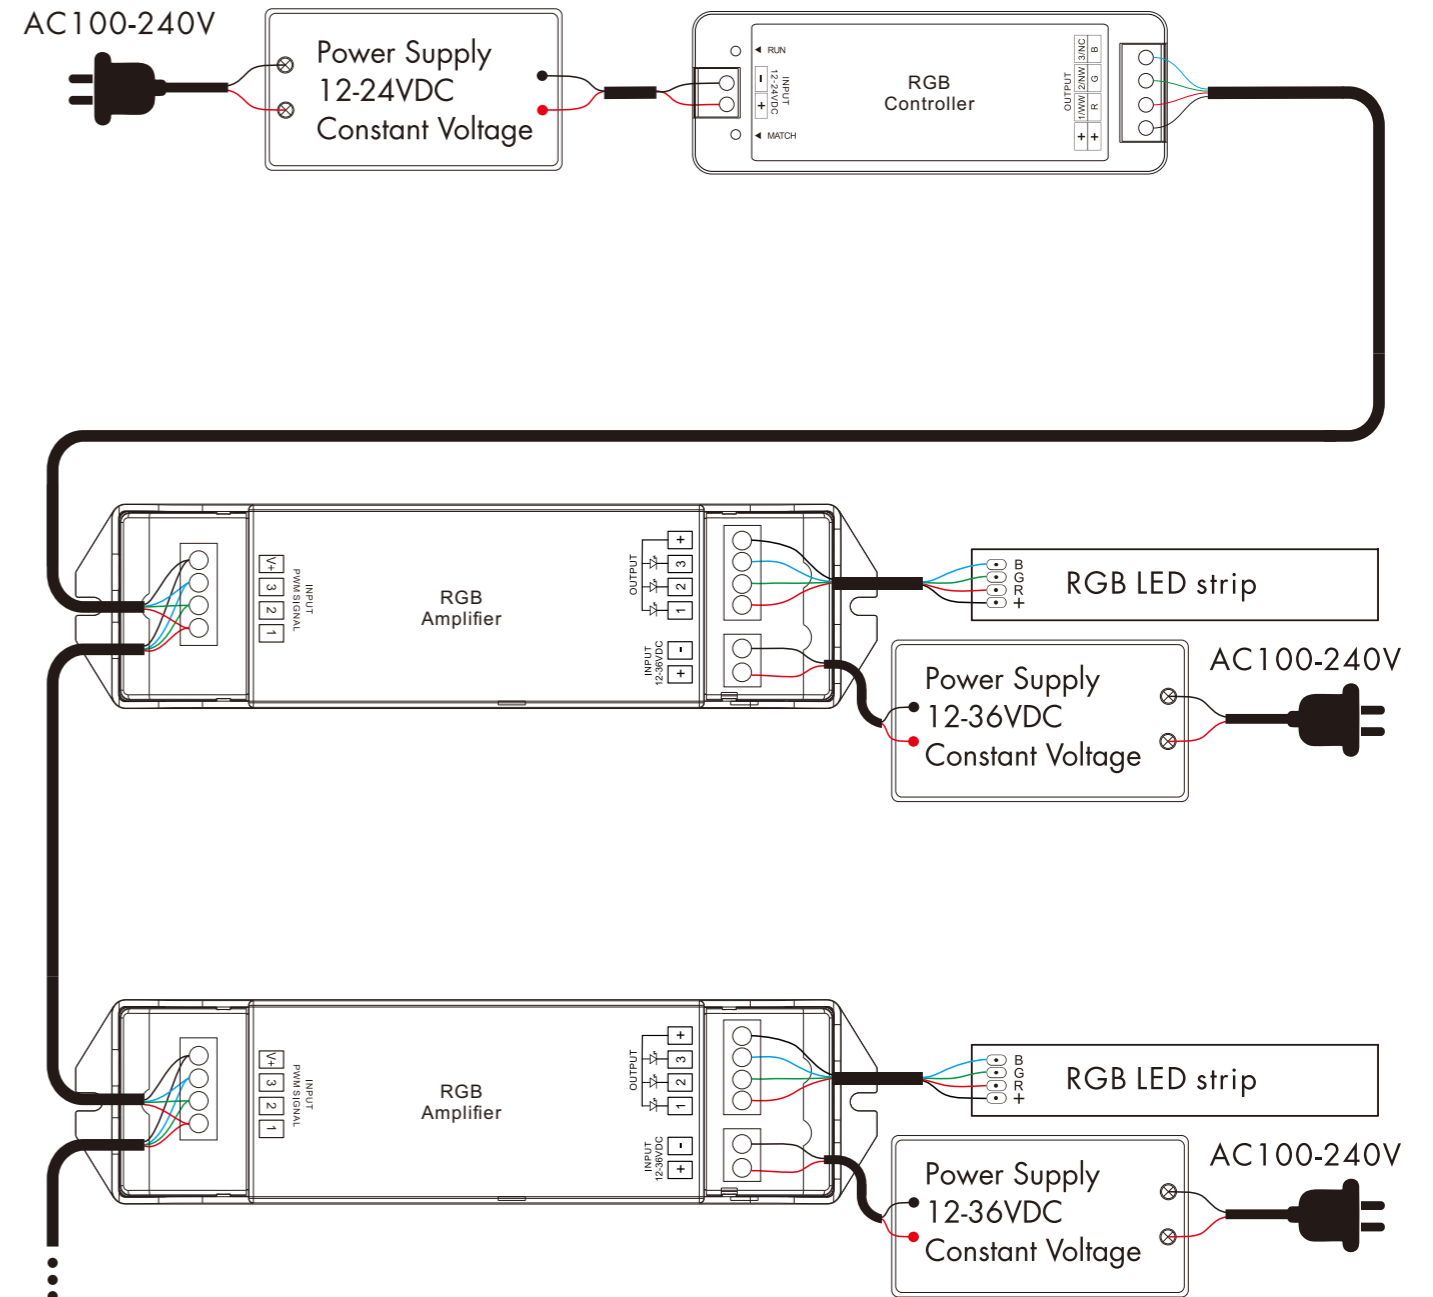


5050 10MM 60LED RGB LED Strip

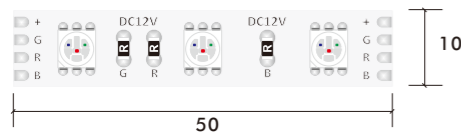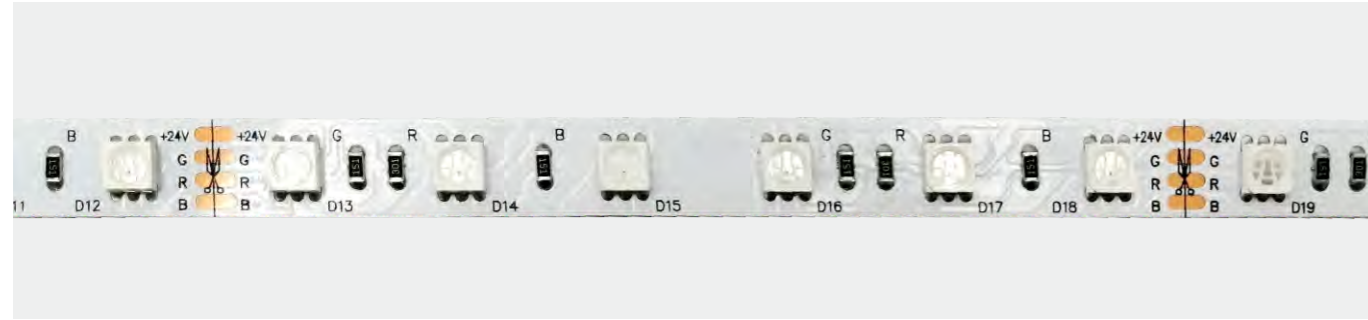

**12V DC 10mm 5050 60LED RGB Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-5050TC-012CV-060S-MY3	12	14.4	060	N/A	N/A	RGB	80/90	50	120

\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

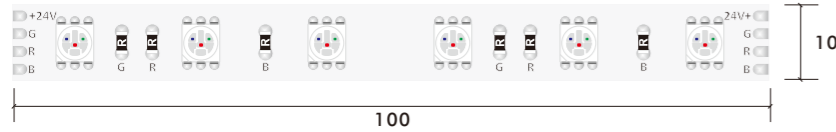



**24V DC 10mm 5050 60LED RGB Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-5050TC-024CV-060S-MY3	24	14.4	060	N/A	N/A	RGB	80/90	100	120

\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




3838 RGB LED STRIP LIGHT

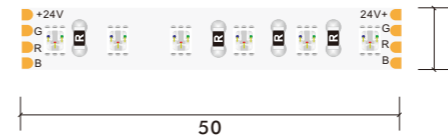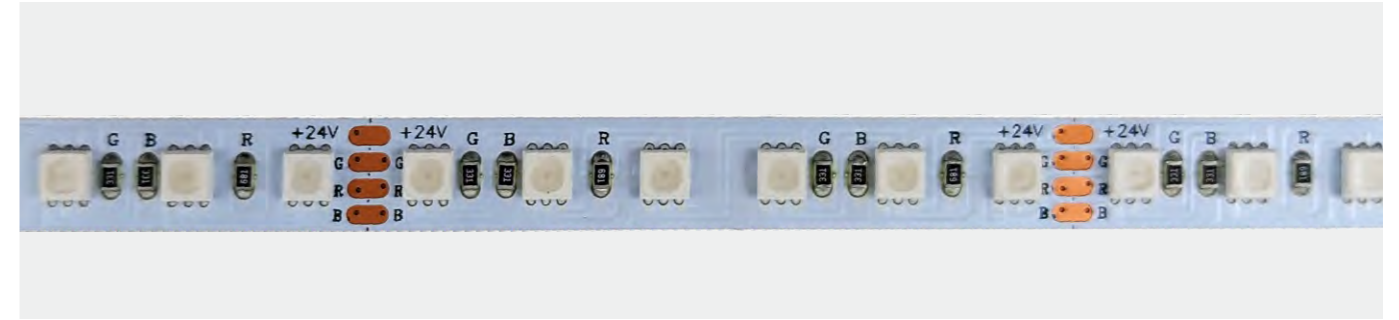

**24V DC 8mm 3838 120LED RGB Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-3838TC-024CV-120S-MY3	24	12	120	N/A	N/A	RGB	80/90	50	120


\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

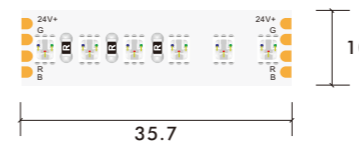

**24V DC 10mm 3838 168LED RGB Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-3838TC-024CV-168S-MY3	24	16.8	168	N/A	N/A	RGB	80/90	35.7	120

\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


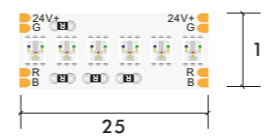


**24V DC 10mm 3838 240LED RGB Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-3838TC-024CV-240S-MY3	24	19.2	240	N/A	80	RGB	80/90	25	120

\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


4040 10 MM 120LED RGB LED Strip

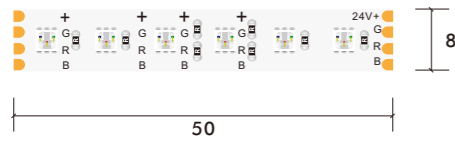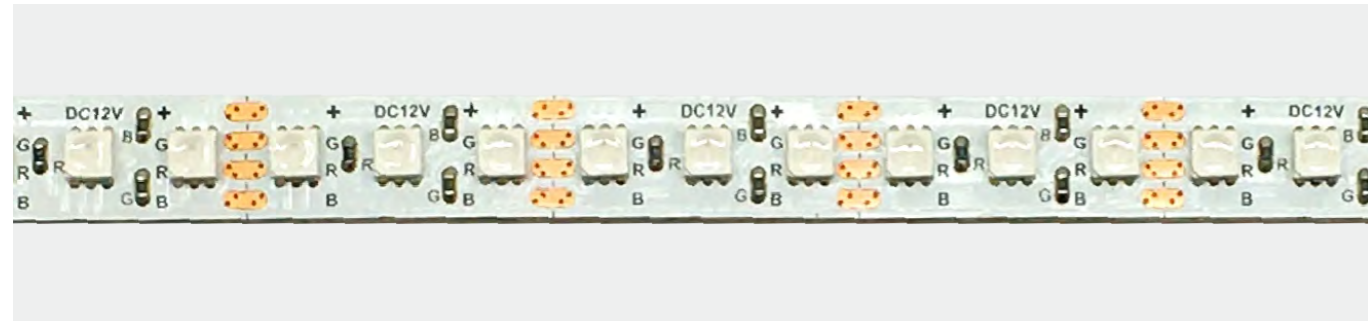

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-4040TC-024CV-120S-MY3	24	19.2	120	N/A	N/A	RGB	80/90	50	120

\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 8 MM 120LED RGB LED Strip

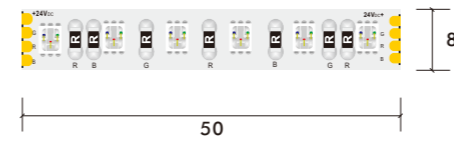


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-2835TC-024CV-120S-MY3	24	12	120	N/A	N/A	RGB	80/90	50	120



\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



# RGBW STRIP LIGHT

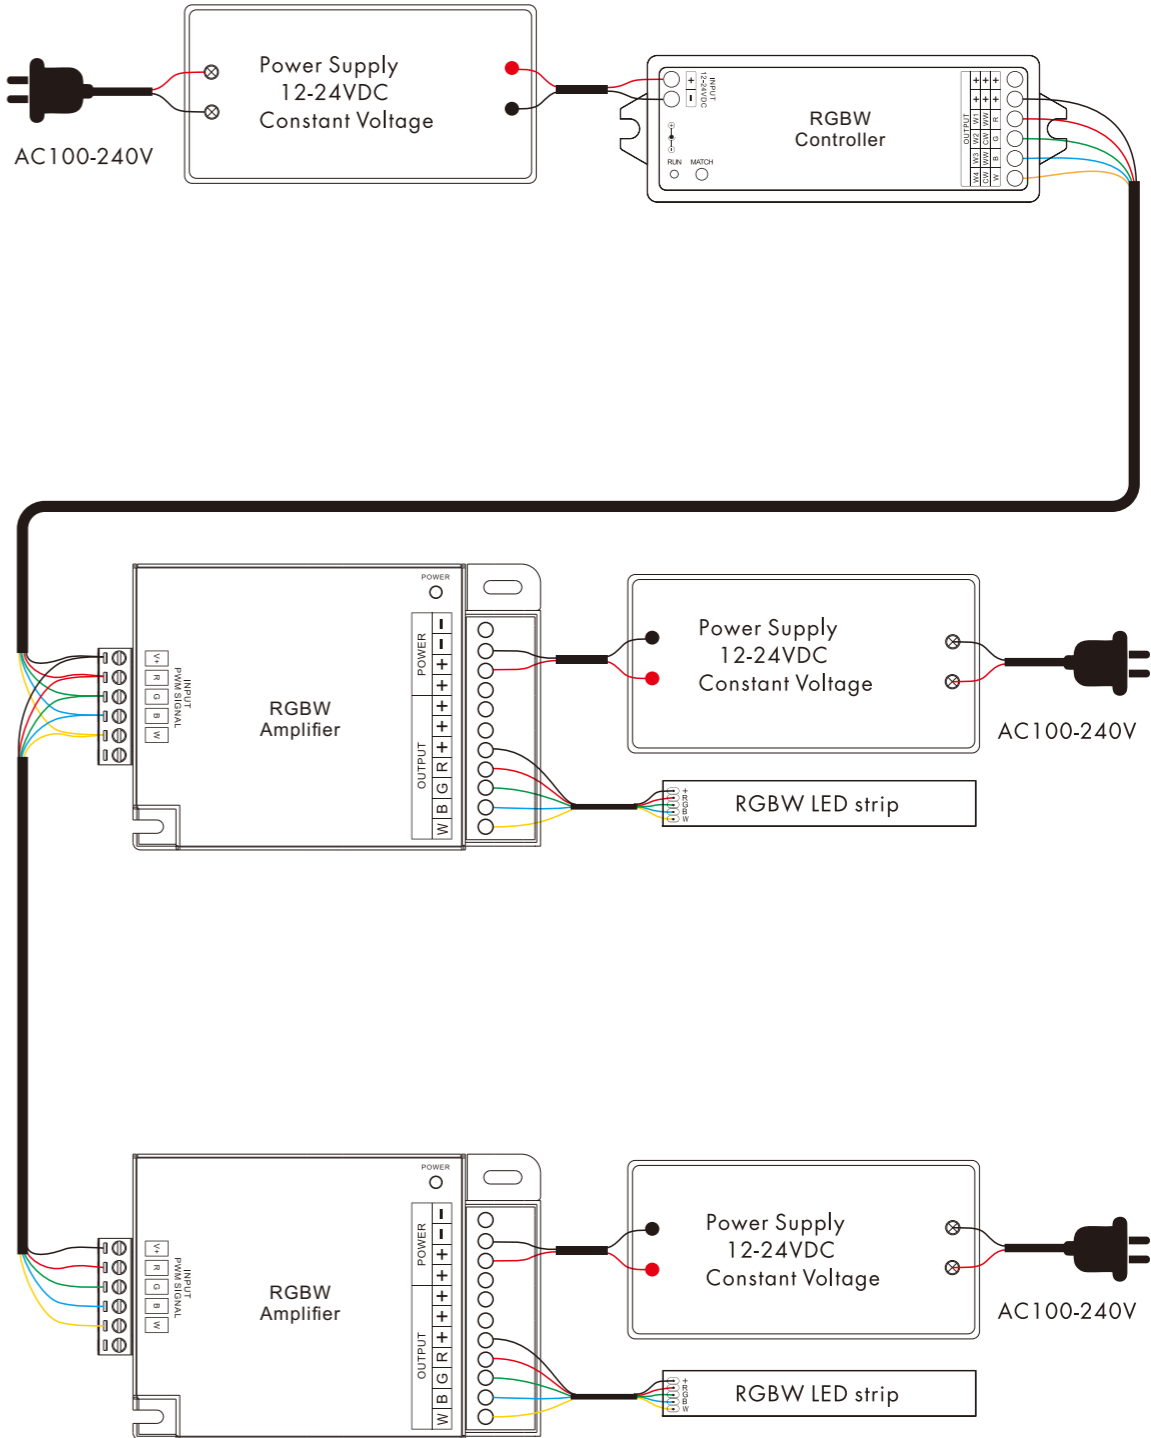


5050 RGBW LED Strip

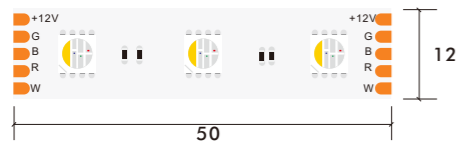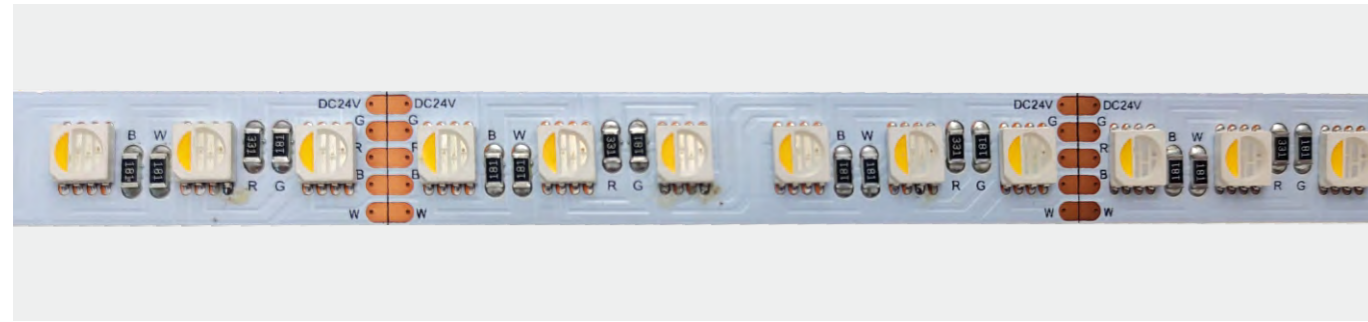


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12WXX-5050MC-012CV-060S-MY3	12	19.2	60	N/A	N/A	RGBW	80/90	50	120

\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

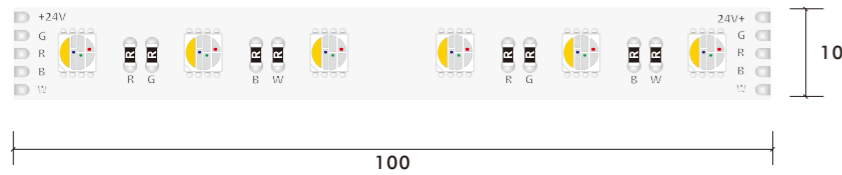

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-5050MC-024CV-060S-MY3	24	19.2	60	N/A	N/A	RGBW	80/90	100	120


\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

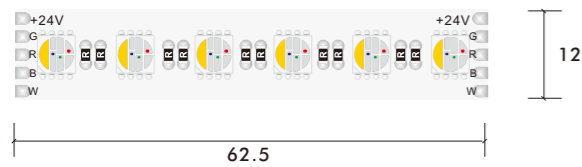

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12WXX-5050MC-024CV-096S-MY3	24	23	96	N/A	N/A	RGBW	80/90	62.5	120


\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

4040 8 / 10 MM 126LED RGBW LED Strip

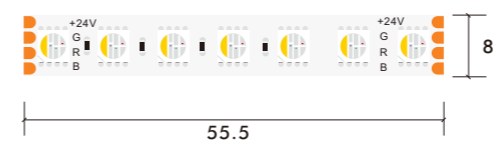

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-4040MC-024CV-126S-MY3	24	16.8	126	N/A	N/A	RGBW	80/90	55.5	120


\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

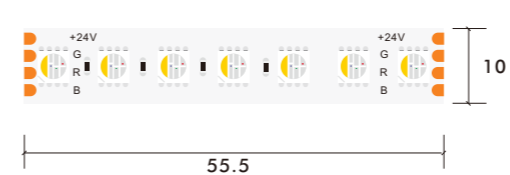


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-4040MC-024CV-126S-MY3	24	16.8	126	N/A	N/A	RGBW	80/90	55.5	120

\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

# RGB CCT STRIP LIGHT

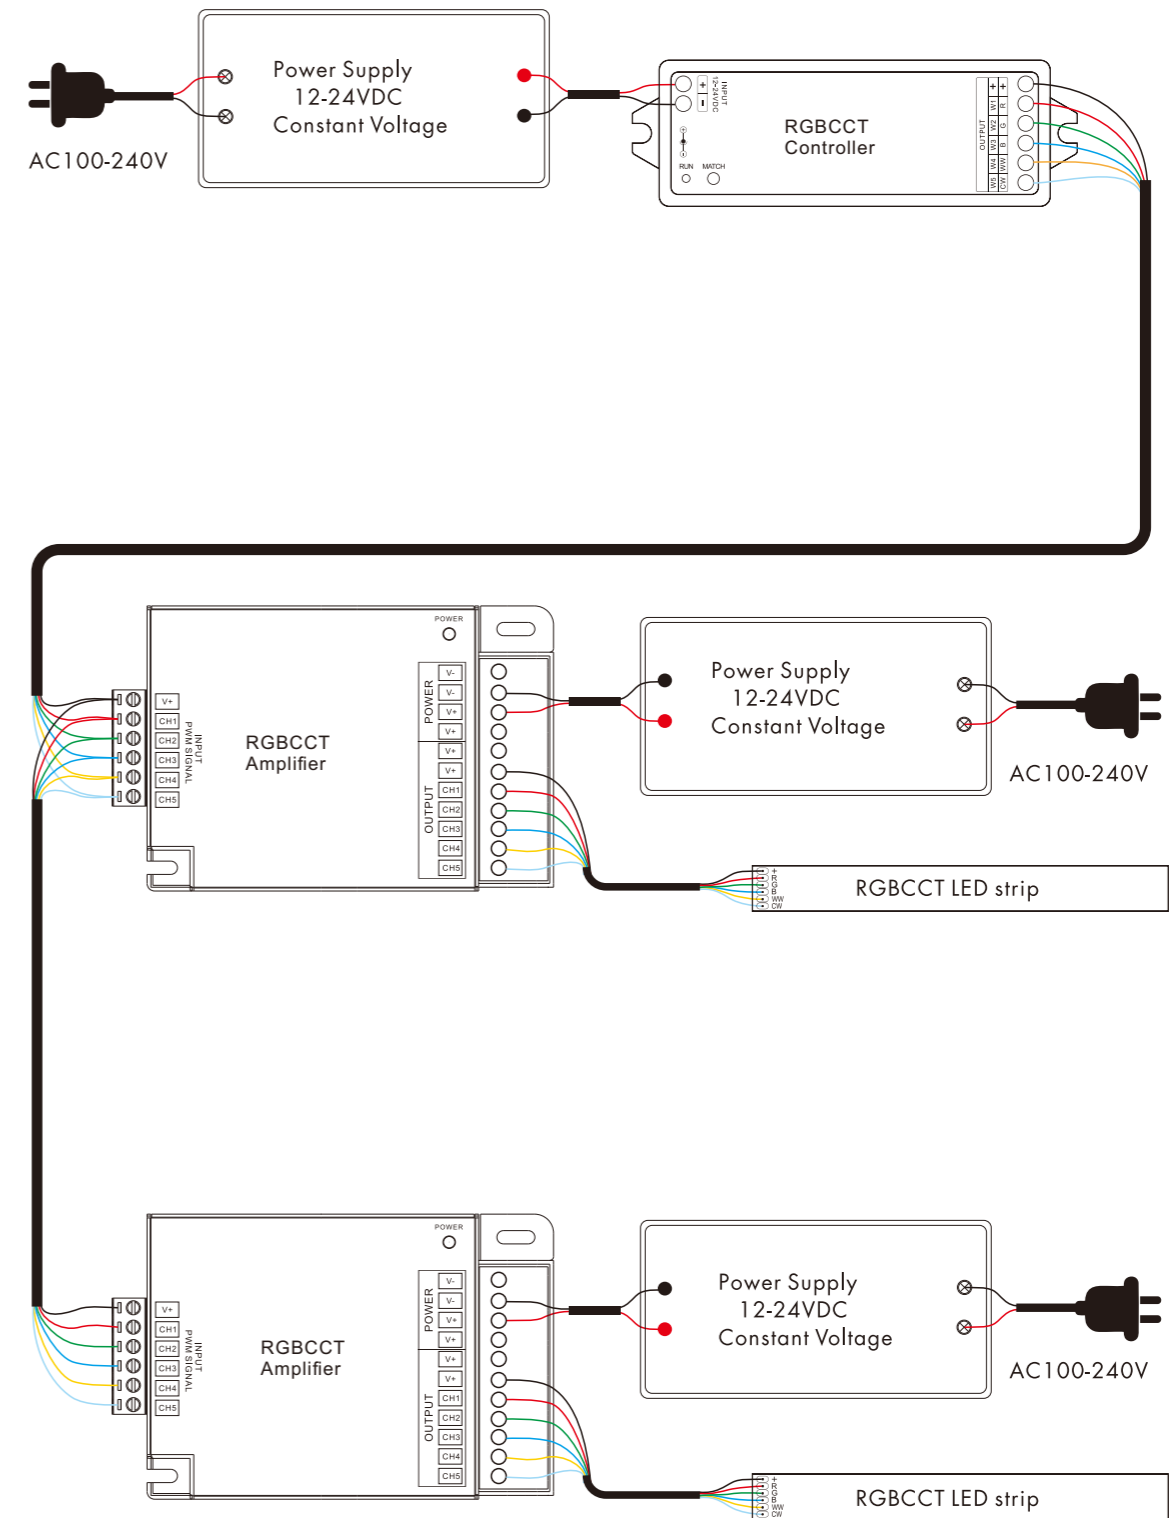


5050 10MM 60LED RGB CCT LED Strip

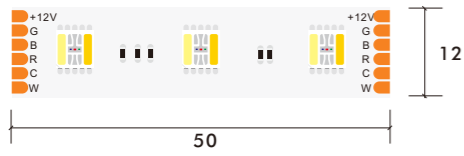

12V DC 12mm 5050 60LED RGB CCT Color LED Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12WXX-5050FC-012CV-060S-MY3	12	19.2	60	N/A	N/A	RGBWW	80/90	50	120


\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

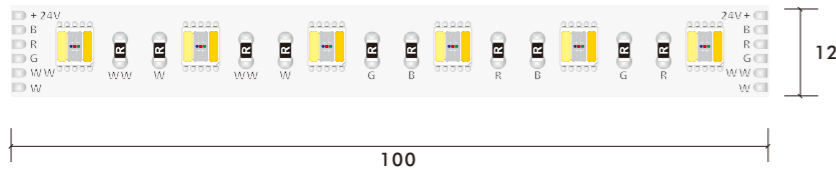

24V DC 12mm 5050 60LED RGB CCT Color LED Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12WXX-5050FC-024CV-060S-MY3	24	19.2	60	N/A	N/A	RGBWW	80/90	100	120

\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

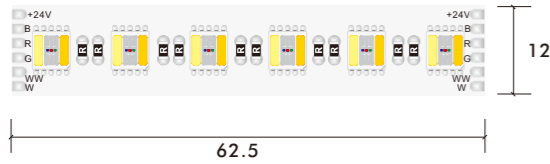

24V DC 12mm 5050 96LED RGB CCT Color LED Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12WXX-5050FC-024CV-096S-MY3	24	23	96	N/A	N/A	RGBWW	80/90	62.5	120

\*The strip light will come with 5 meter /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




# STANDARD STRIP LIGHT


SINGLE COLOR

## PROJECT GUILD LINE


### On and off

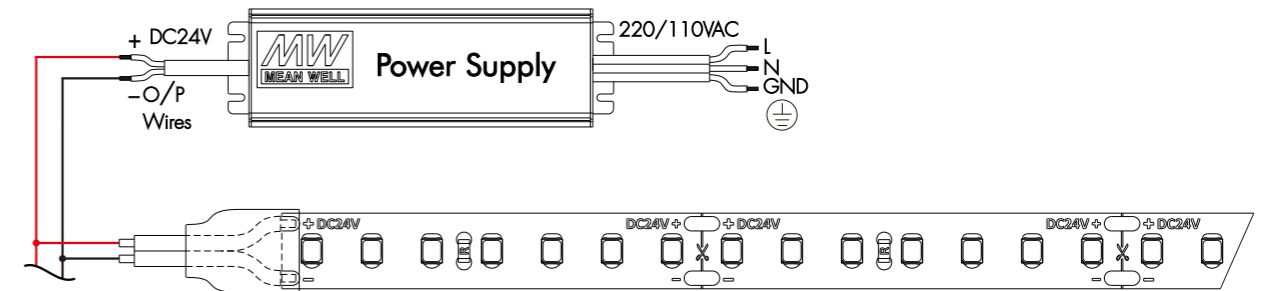


### RF Dimming System

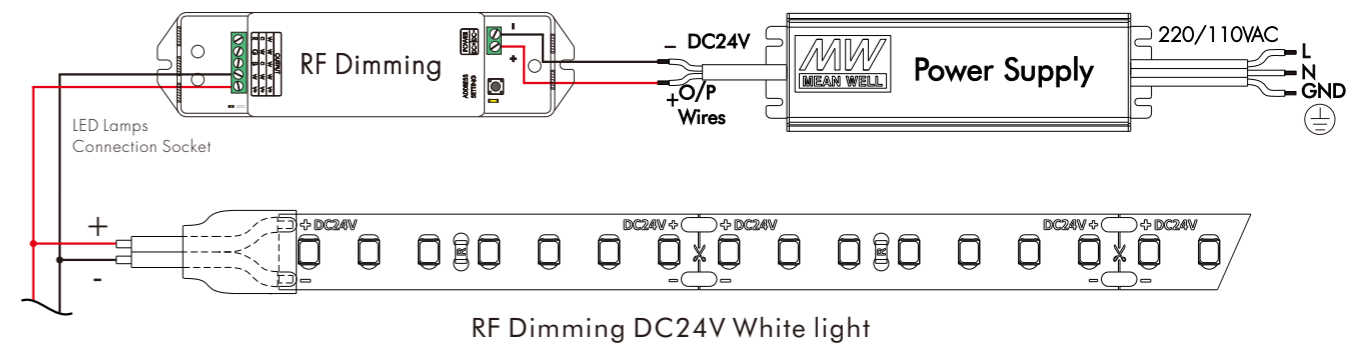


### 0-10V Dimming System

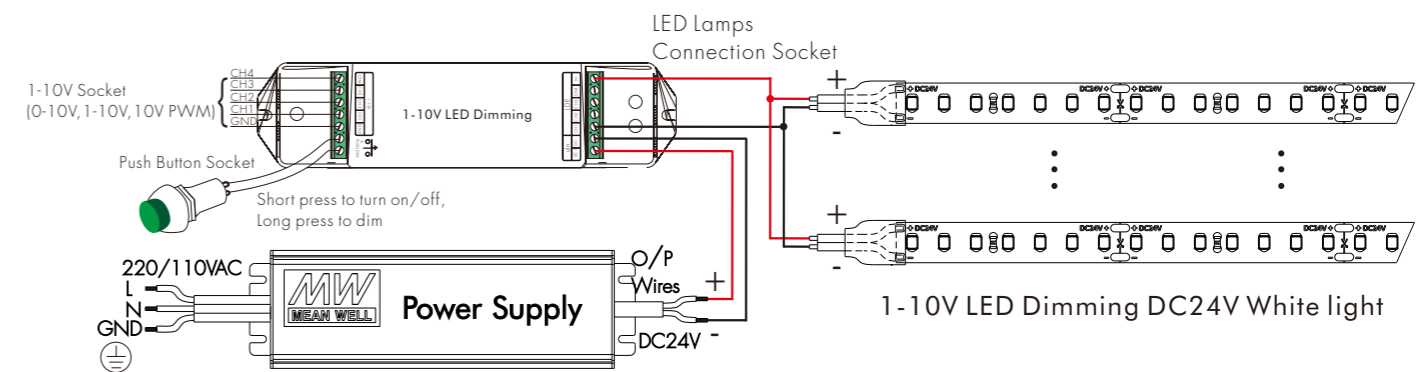

### Dali Dimming system

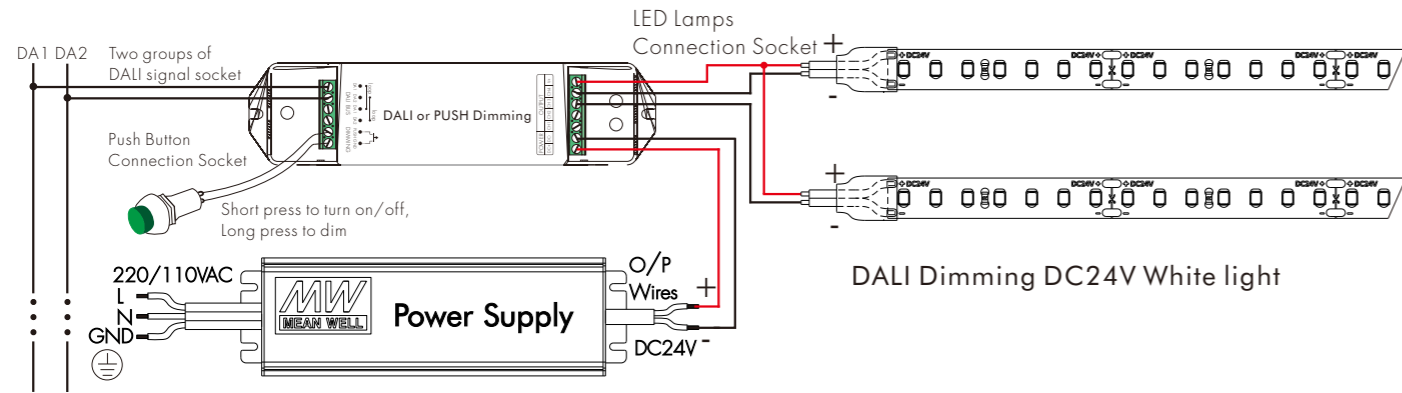


### DMX Dimming system

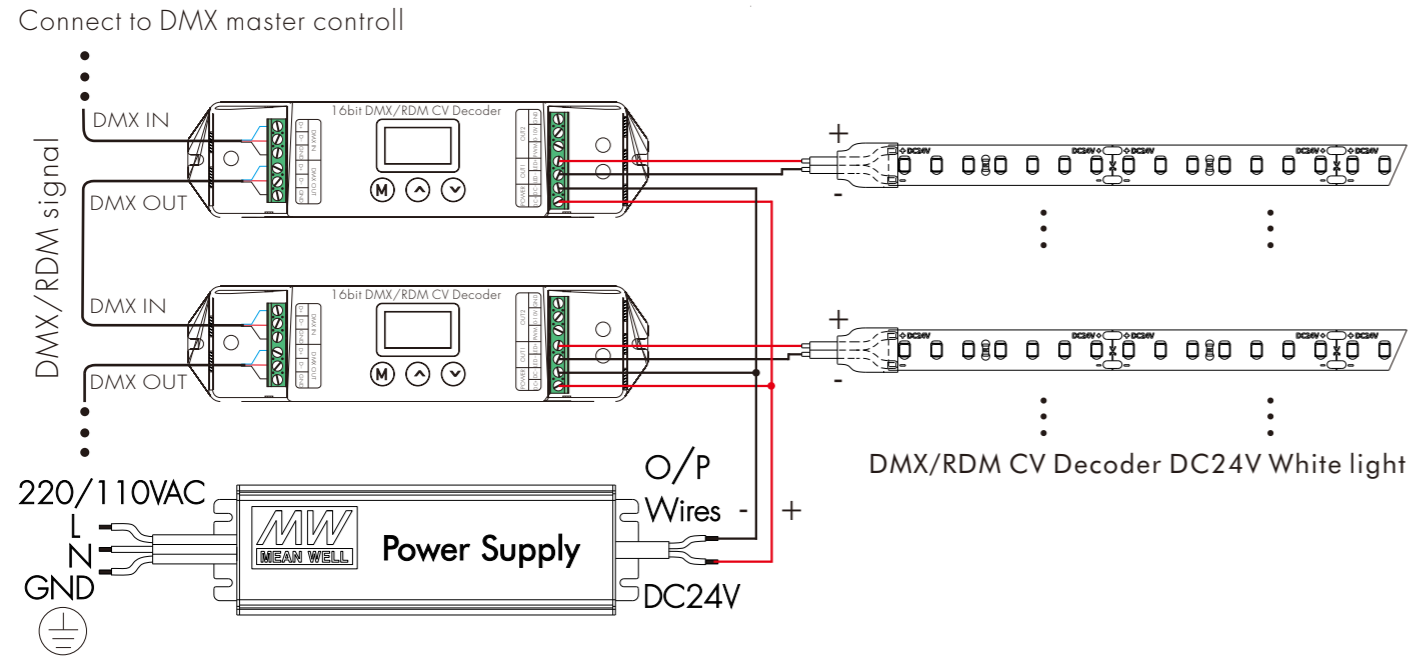

### GUIDE LINE FOR DIGITAL STRIP LIGHT


SERIES	ITEM NUMBER	VOLTAGE	POWER	LED QTY	LED TYPE	CUT UNIT	WIDTH	
Single Color Constant voltage	S08WXX-2835XX-012CV-120S-MY3	12V	12	120	2835	25	8	
	S08WXX-2835XX-024CV-120S-MY3	24V	12	120	2835	50	8	
	S10WXX-2835XX-024CV-168S-MY3	24V	16.8	168	2835	35.7	10	
	S08WXX-2835XX-024CV-180S-MY3	24V	14	180	2835	33.33	8	
	S10WXX-2835XX-024CV-180S-MY3	24V	18	180	2835	33.33	10	
	S10WXX-2835XX-012CV-240S-MY3	12V	19.2	240	2835	12.5	10	
	S10WXX-2835XX-024CV-240S-MY3	24V	19.2	240	2835	25	10	
	S10WXX-5050XX-012CV-060S-MY3	12V	14.4	60	5050	50	10	
	S10WXX-5050XX-024CV-060S-MY3	24V	14.4	60	5050	100	10	
	S20WXX-5050XX-012CV-120D-MY3	12V	24	120	5050	50	20	
	S20WXX-5050XX-024CV-120D-MY3	24V	24	120	5050	100	20	
	S10WXX-4040XX-012CV-120S-MY3	12V	19.2	120	4040	25	10	
	S10WXX-4040XX-024CV-120S-MY3	24V	19.2	120	4040	50	10	
	S15WXX-2835XX-024CV-240D-MY3	NEW	24V	20	240	2835	25	15
	S20WXX-2835XX-024CV-276T-MY3	NEW	24V	24	276	2835	21.4	20
	S30WXX-2835XX-024CV-360T-MY3	NEW	24V	30	360	2835	16.6	30

2835 8 MM 120LED WHITE

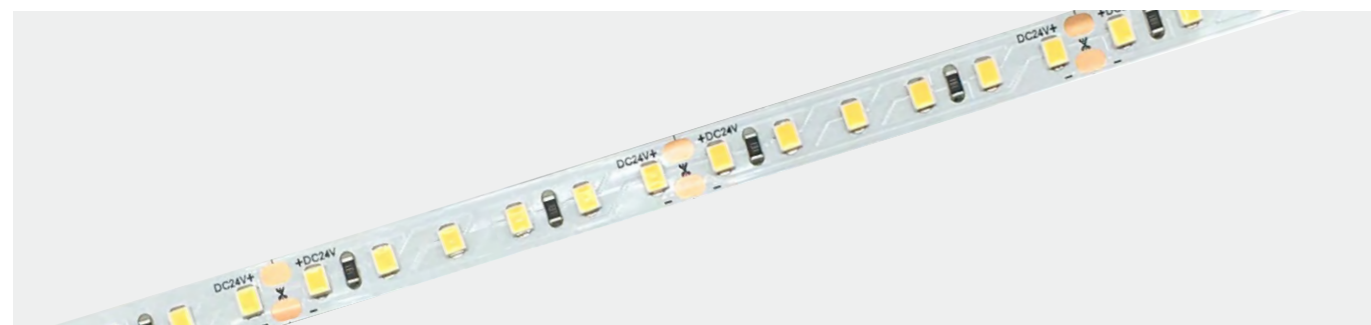

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-283527-012CV-120S-MY3	12	12	120	1020	85	2700	80/90	25	120
S08WXX-283530-012CV-120S-MY3	12	12	120	1080	90	3000	80/90	25	120
S08WXX-283540-012CV-120S-MY3	12	12	120	1140	95	4000	80/90	25	120
S08WXX-283560-012CV-120S-MY3	12	12	120	1080	90	6000	80/90	25	120



\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

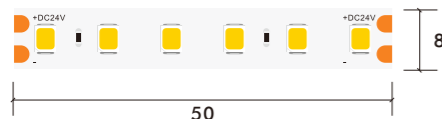

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-283527-012CV-120S-MY3	24	12	120	1020	85	2700	80/90	50	120
S08WXX-283530-012CV-120S-MY3	24	12	120	1080	90	3000	80/90	50	120
S08WXX-283540-012CV-120S-MY3	24	12	120	1140	95	4000	80/90	50	120
S08WXX-283560-024CV-120S-MY3	24	12	120	1080	90	6000	80/90	50	120


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 10 MM 168LED WHITE

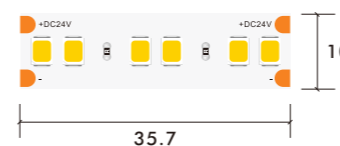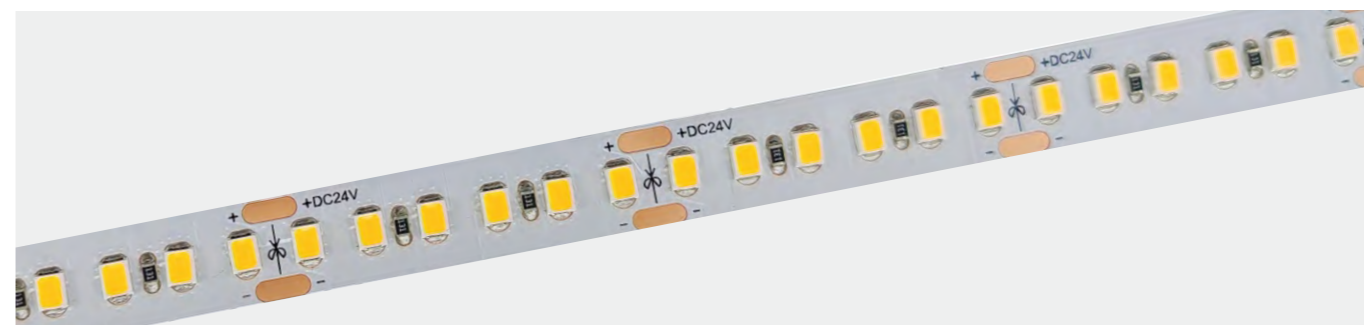

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-283527-012CV-168S-MY3	24	19.2	168	1632	85	2700	80/90	35.7	120
S10WXX-283530-012CV-168S-MY3	24	19.2	168	1728	90	3000	80/90	35.7	120
S10WXX-283540-012CV-168S-MY3	24	19.2	168	1824	95	4000	80/90	35.7	120
S10WXX-283560-012CV-168S-MY3	24	19.2	168	1728	90	6000	80/90	35.7	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

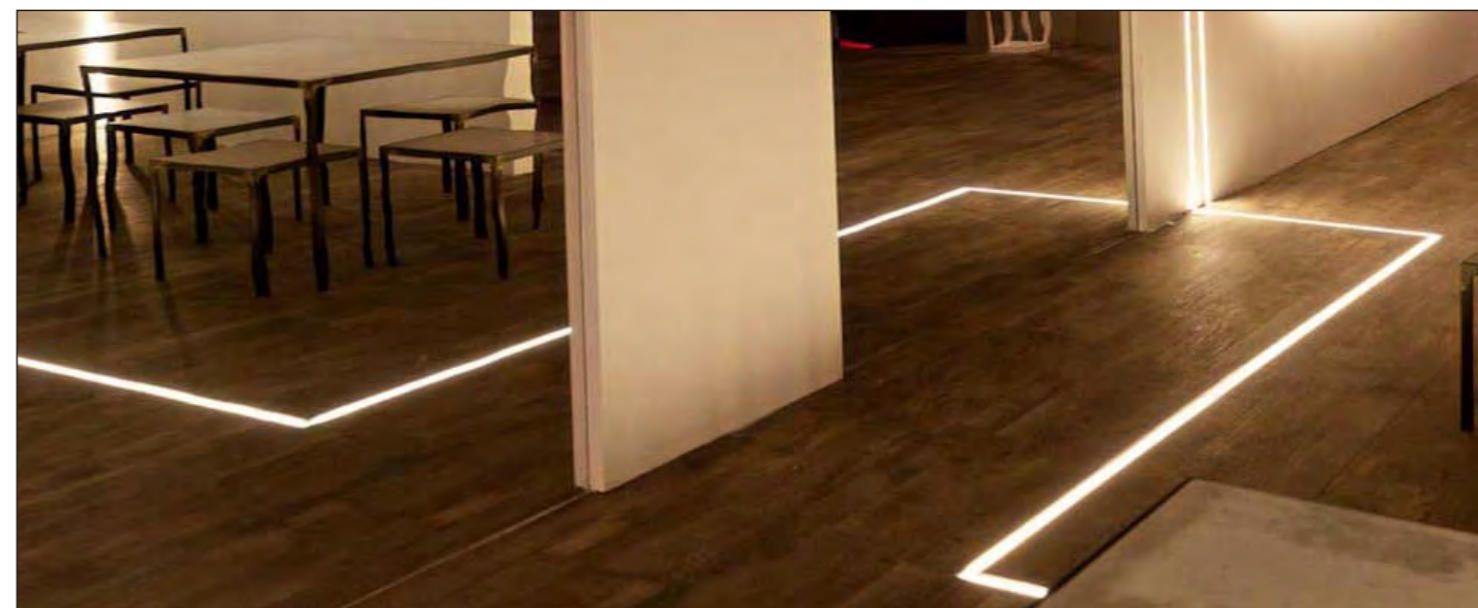


2835 8 MM 180LED WHITE



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-283527-024CV-180S-MY3	24	14	180	1020	85	2700	80/90	33.33	120
S08WXX-283530-024CV-180S-MY3	24	14	180	1080	90	3000	80/90	33.33	120
S08WXX-283540-024CV-180S-MY3	24	14	180	1140	95	4000	80/90	33.33	120
S08WXX-283560-024CV-180S-MY3	24	14	180	1080	90	6000	80/90	33.33	120



\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

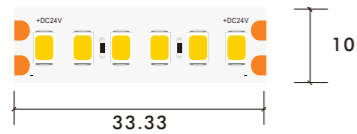

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-283527-024CV-180S-MY3	24	18	180	1530	85	2700	80/90	33.33	120
S10WXX-283530-024CV-180S-MY3	24	18	180	1620	90	3000	80/90	33.33	120
S10WXX-283540-024CV-180S-MY3	24	18	180	1710	95	4000	80/90	33.33	120
S10WXX-283560-024CV-180S-MY3	24	18	180	1620	90	6000	80/90	33.33	120


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 10 MM 240LED WHITE

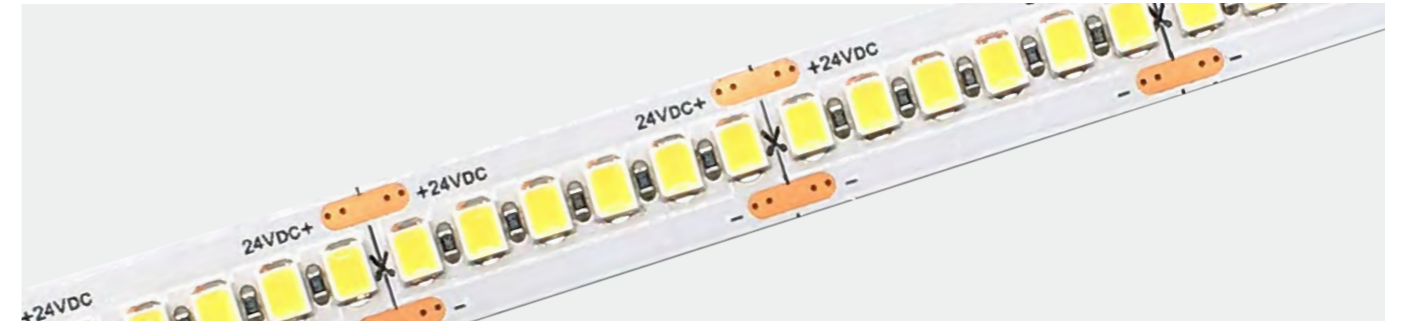

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-283527-012CV-240S-MY3	12	19.2	240	1632	85	2700	80/90	12.5	120
S10WXX-283530-012CV-240S-MY3	12	19.2	240	1728	90	3000	80/90	12.5	120
S10WXX-283540-012CV-240S-MY3	12	19.2	240	1824	95	4000	80/90	12.5	120
S10WXX-283560-012CV-240S-MY3	12	19.2	240	1728	90	6000	80/90	12.5	120


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

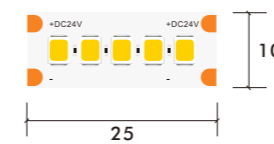

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-283527-024CV-240S-MY3	24	19.2	240	1632	85	2700	80/90	25	120
S10WXX-283530-024CV-240S-MY3	24	19.2	240	1728	90	3000	80/90	25	120
S10WXX-283540-024CV-240S-MY3	24	19.2	240	1824	95	4000	80/90	25	120
S10WXX-283560-024CV-240S-MY3	24	19.2	240	1728	90	6000	80/90	25	120


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

5050 10 MM 60LED WHITE

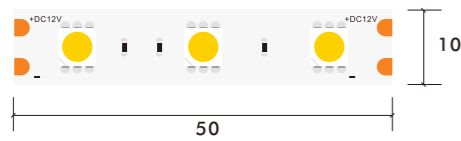

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-505027-012CV-060S-MY3	12	14.4	60	1152	80	2700	80/90	50	120
S10WXX-505030-012CV-060S-MY3	12	14.4	60	1224	85	3000	80/90	50	120
S10WXX-505040-012CV-060S-MY3	12	14.4	60	1296	90	4000	80/90	50	120
S10WXX-505060-024CV-060S-MY3	12	14.4	60	1224	85	6000	80/90	50	120



\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

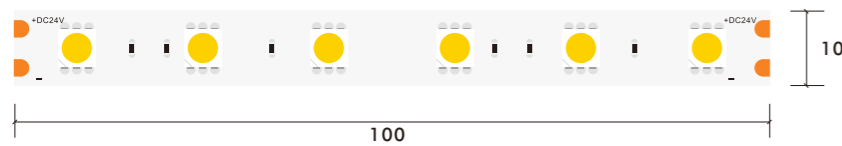

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-505027-024CV-060S-MY3	24	14.4	60	1152	80	2700	80/90	100	120
S10WXX-505030-024CV-060S-MY3	24	14.4	60	1224	85	3000	80/90	100	120
S10WXX-505040-024CV-060S-MY3	24	14.4	60	1296	90	4000	80/90	100	120
S10WXX-505060-024CV-060S-MY3	24	14.4	60	1224	85	6000	80/90	100	120


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

5050 20 MM 120LED WHITE

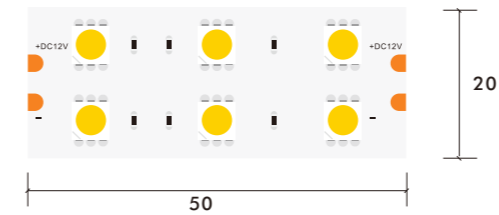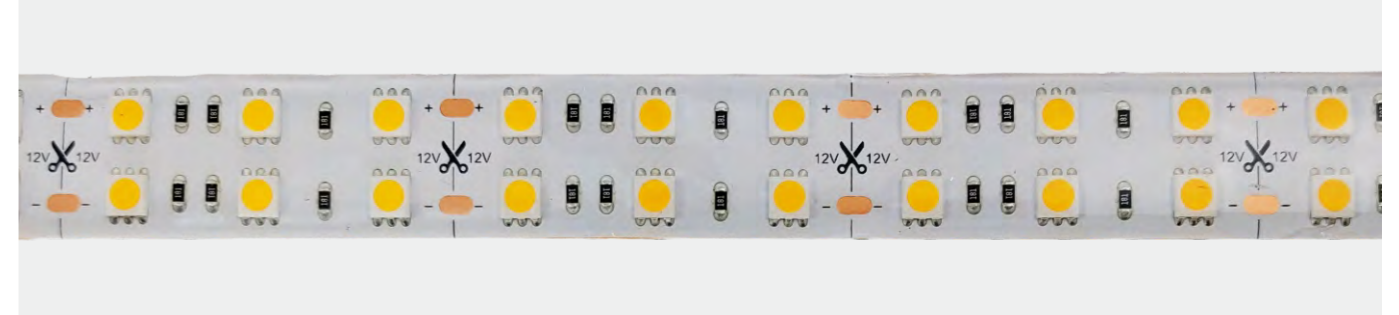

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S20WXX-505027-012CV-120D-MY3	12	24	120	1920	80	2700	80/90	50	120
S20WXX-505030-012CV-120D-MY3	12	24	120	2040	85	3000	80/90	50	120
S20WXX-505040-012CV-120D-MY3	12	24	120	2160	90	4000	80/90	50	120
S20WXX-505060-024CV-120D-MY3	12	24	120	2040	85	6000	80/90	50	120



\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

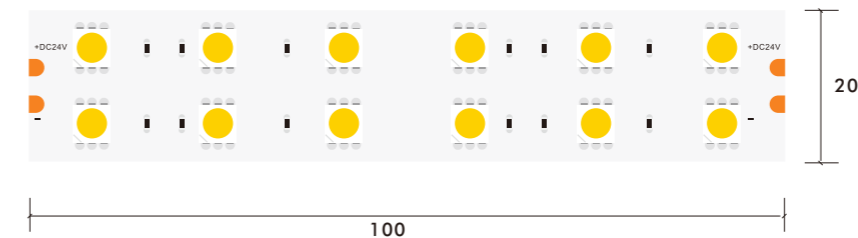

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S20WXX-505027-024CV-120D-MY3	24	24	120	1920	80	2700	80/90	100	120
S20WXX-505030-024CV-120D-MY3	24	24	120	2040	85	3000	80/90	100	120
S20WXX-505040-024CV-120D-MY3	24	24	120	2160	90	4000	80/90	100	120
S20WXX-505060-024CV-120D-MY3	24	24	120	2040	85	6000	80/90	100	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


4040 10 MM 120LED WHITE

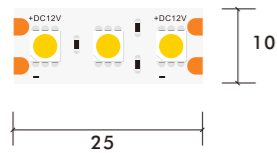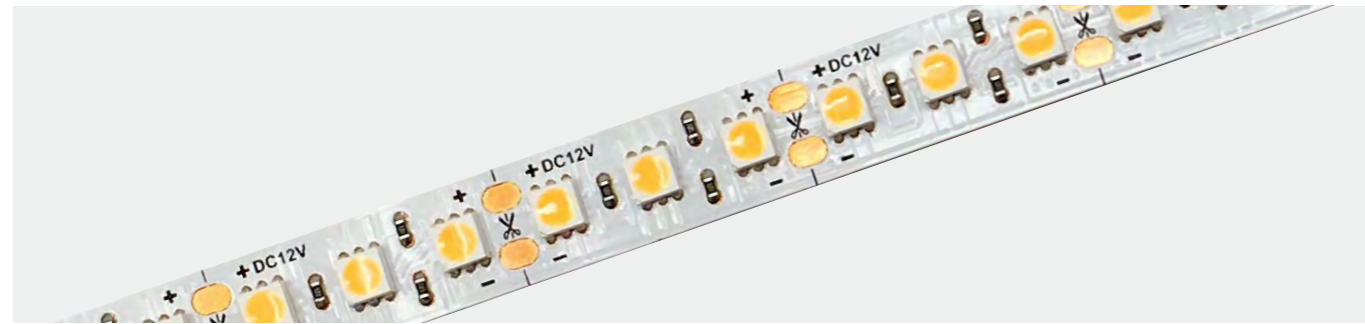

**12V DC 10mm 4040 120LED Single Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-404027-012CV-120S-MY3	12	19.2	120	1630	85	2700	90	25	120
S10WXX-404030-012CV-120S-MY3	12	19.2	120	1728	90	3000	90	25	120
S10WXX-404040-012CV-120S-MY3	12	19.2	120	1824	95	4000	90	25	120
S10WXX-404060-012CV-120S-MY3	12	19.2	120	1728	90	6000	90	25	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


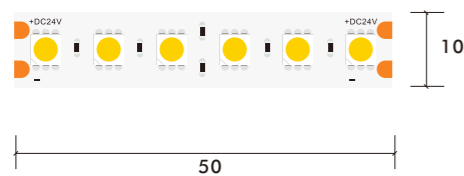


**24V DC 10mm 4040 120LED Single Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-404027-012CV-120S-MY3	24	19.2	120	1630	85	2700	90	50	120
S10WXX-404030-012CV-120S-MY3	24	19.2	120	1728	90	3000	90	50	120
S10WXX-404040-012CV-120S-MY3	12	19.2	120	1824	95	4000	90	50	120
S10WXX-404060-024CV-120S-MY3	12	19.2	120	1728	90	6000	90	50	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


2835 15 MM 240LED WHITE **NEW**

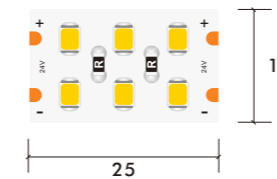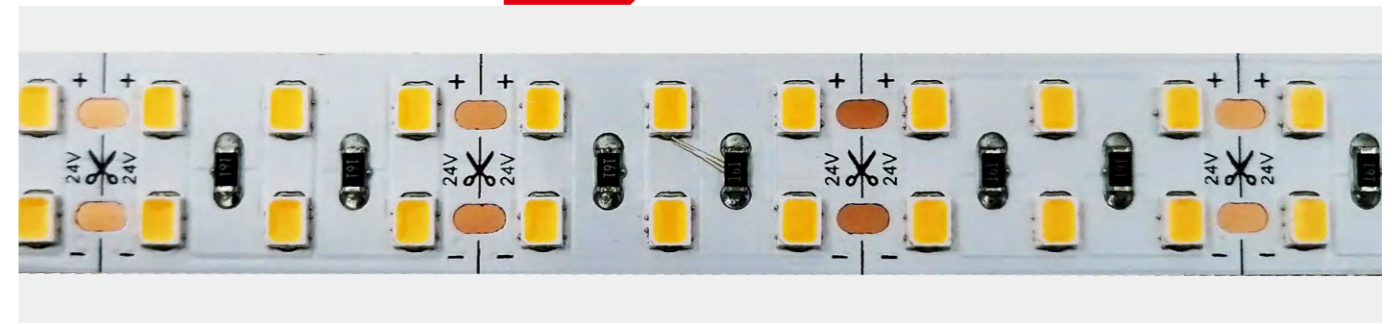

**24V DC 15mm 2835 240LED Single Color LED Strip**


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S15WXX-283527-024CV-240D-MY3	24	20	240	1600	80	2700	80/90	25	120
S15WXX-283530-024CV-240D-MY3	24	20	240	1700	85	3000	80/90	25	120
S15WXX-283540-024CV-240D-MY3	24	20	240	1800	90	4000	80/90	25	120
S15WXX-283560-024CV-240D-MY3	24	20	240	1700	85	6000	80/90	25	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

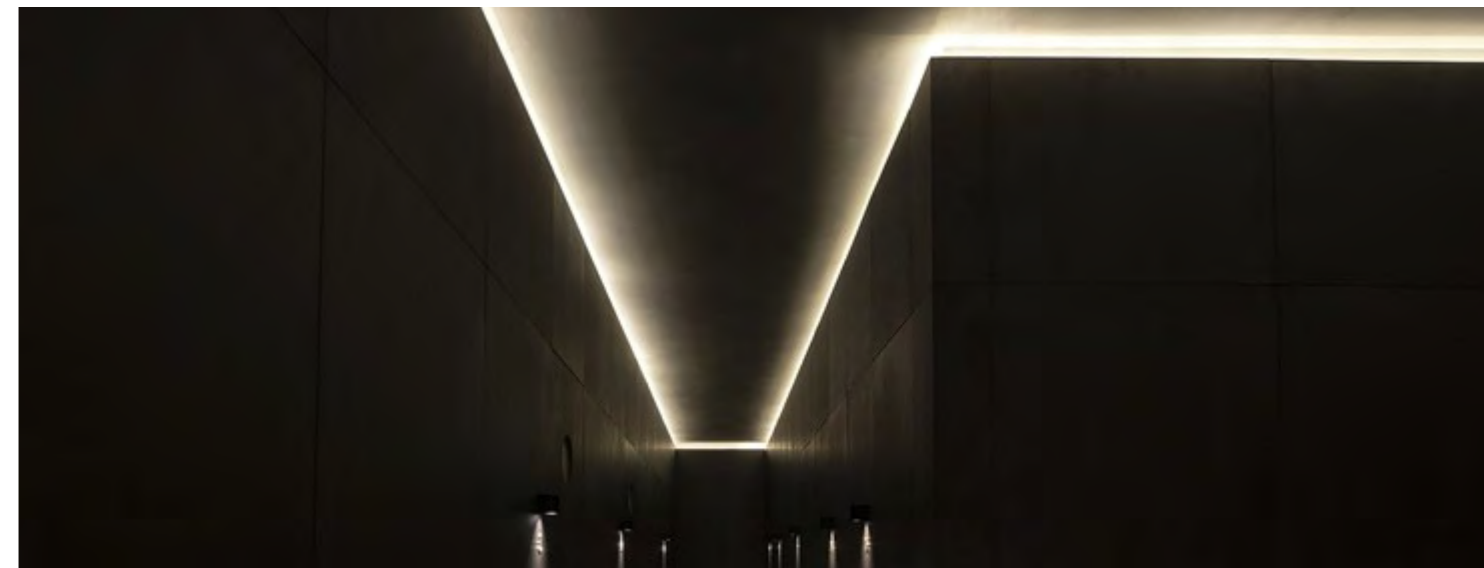

2835 20 MM 276 LED WHITE

NEW

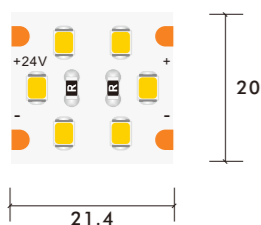


**24V DC 20mm 2835 276LED Single Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S20WXX-283527-024CV-276T-MY3	24	24	276	2040	85	2700	80/90	21.4	120
S20WXX-283530-024CV-276T-MY3	24	24	276	2160	90	3000	80/90	21.4	120
S20WXX-283540-024CV-276T-MY3	24	24	276	2280	95	4000	80/90	21.4	120
S20WXX-283560-024CV-276T-MY3	24	24	276	2160	90	6000	80/90	21.4	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 30 MM 360LED WHITE

NEW

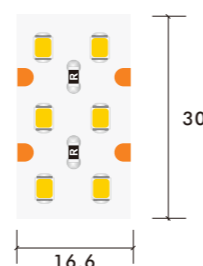

**24V DC 20mm 5050 120LED Single Color LED Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S30WXX-283527-024CV-360T-MY3	24	30	360	2400	80	2700	80/90	16.6	120
S30WXX-283530-024CV-360T-MY3	24	30	360	2415	85	3000	80/90	16.6	120
S30WXX-283540-024CV-360T-MY3	24	20	360	2700	90	4000	80/90	16.6	120
S30WXX-283560-024CV-360T-MY3	24	30	360	2415	85	6000	80/90	16.6	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



# POWER SUPPLY



## LRS SERIES POWER SUPPLY

### MEANWELL LRS NON WATERPROOF LED POWER SUPPLY



Model Number	Input Voltage (ac v)	Input Current (A)	Power (W)	Output Voltage (dc v)	Related Current (A)	Dimensions (mm)	Package Qty (pcs)
LRS-35-12	85-264	0.42	35	12	3.0	99*82*30	60
LRS-35-24	85-264	0.42	35	24	1.5	99*82*30	60
LRS-50-12	85-264	0.56	50	12	4.2	99*82*30	60
LRS-50-24	85-264	0.56	50	24	2.2	99*82*30	60
LRS-75-12	85-264	0.85	75	12	6.0	99*97*30	45
LRS-75-24	85-264	0.85	75	24	3.2	99*97*30	45
LRS-100-12	85-264	1.20	100	12	8.5	129*97*30	40
LRS-100-24	85-264	1.20	100	24	4.5	129*97*30	40
LRS-150-12	85-264	1.70	150	12	12.5	159*97*30	30
LRS-150-24	85-264	1.70	150	24	6.5	159*97*30	30
LRS-200-12	85-264	2.20	200	12	17.0	215*115*30	15
LRS-200-24	85-264	2.20	200	24	8.8	215*115*30	15
LRS-350-12	85-264	3.40	350	12	29.0	215*115*30	15
LRS-350-24	85-264	3.40	350	24	14.6	215*115*30	15
LRS-450-12	85-264	6.0	450	12	37.5	225*124*35	15
LRS-450-24	85-264	6.0	450	24	18.8	225*124*35	15
LRS-600-12	85-264	7.5	600	12	50	225*124*41	12
LRS-600-24	85-264	7.5	600	24	25	225*124*41	12

LPV SERIES POWER SUPPLY

MEANWELL LPV WATERPROOF LED POWER SUPPLY



LPV Meanwell LPV non waterproof LED power supply							
Model Number	Input Voltage (ac v)	Input Current (A)	Power (W)	Output Voltage (dc v)	Related Current (A)	Dimensions (mm)	Package Qty (pcs)
LPH-18-12	180-264	0.30	18	12	1.5	140*30*22	70
LPH-18-24	180-264	0.30	18	24	0.75	140*30*22	70
LPV-20-12	90-264	0.35	20	12	1.67	118*35*26	60
LPV-20-24	90-264	0.35	20	24	0.84	118*35*26	60
LPV-35-12	90-264	0.70	35	12	3.0	148*40*30	40
LPV-35-24	90-264	0.70	35	24	1.5	148*40*30	40
LPV-60-12	90-264	1.0	60	12	5.0	162.5*42.5*32	32
LPV-60-24	90-264	1.0	60	24	2.5	162.5*42.5*32	32
LPV-100-12	90-264	1.20	100	12	8.5	190*52*37	20
LPV-100-24	90-264	1.20	100	24	4.2	190*52*37	20
LPV-150-12	90-264	1.7	150	12	10.0	191*63*37.5	20
LPV-150-24	90-264	1.7	150	24	6.3	191*63*37.5	20

ELG SERIES POWER SUPPLY

MEANWELL ELG NON WATERPROOF LED POWER SUPPLY



ELG Meanwell ELG waterproof LED power supply							
Model Number	Input Voltage (ac v)	Input Current (A)	Power (W)	Output Voltage (dc v)	Related Current (A)	Dimensions (mm)	Package Qty (pcs)
ELG-75-12A	100-305	0.45	75	12	5.0	180*63*35.5	16
ELG-75-24A	100-305	0.45	75	24	3.15	180*63*35.5	16
ELG-100-24A	100-305	0.60	100	24	4.0	199*63*35.5	16
ELG-150-12A	100-305	0.90	150	12	10.0	219*63*35.5	16
ELG-150-24A	100-305	0.90	150	24	6.25	219*63*35.5	16
ELG-200-12A	100-305	1.20	200	12	16.0	244*71*37.5	12
ELG-200-24A	100-305	1.20	200	24	8.4	244*71*37.5	12
ELG-240-24A	100-305	1.50	240	24	10	244*71*37.5	12
ELG-300-12A	100-305	1.60	300	12	22.0	246*77*39.5	9
ELG-300-24A	100-305	1.60	300	24	12.5	246*77*39.5	9

HLG Series Power supply

MEANWELL HLG WATERPROOF LED POWER SUPPLY



Model Number	Input Voltage (ac v)	Input Current (A)	Power (W)	Output Voltage (dv v)	Related Current (A)	Dimensions (mm)	Package Qty (pcs)
HLG-40H-12A	90-305	0.24	40	12	3.33	171*61.5*36.8	20
HLG-40H-24A	90-305	0.24	40	24	1.67	171*61.5*36.8	20
HLG-60H-24A	90-305	0.32	60	24	2.5	171*61.5*36.8	20
HLG-80H-12A	90-305	0.425	80	12	5.0	195.6*61.5*38.8	16
HLG-80H-24A	90-305	0.425	80	24	3.4	195.6*61.5*38.8	16
HLG-100H-24A	90-305	0.55	100	24	4.0	220*68.8*38.8	12
HLG-120H-12A	90-305	0.6	120	12	10.0	220*68.8*38.8	12
HLG-120H-24A	90-305	0.6	120	24	5.0	220*68.8*38.8	12
HLG-150H-12A	90-305	0.75	150	12	12.5	228*68.8*38.8	12
HLG-150H-24A	90-305	0.75	150	24	6.3	228*68.8*38.8	12
HLG-185H-12A	90-305	0.9	185	12	13.0	228*68.8*38.8	12
HLG-185H-24A	90-305	0.9	185	24	7.8	228*68.8*38.8	12
HLG-240H-12A	90-305	2.0	240	12	16.0	244*68.8*38.8	12
HLG-240H-24A	90-305	2.0	240	24	10.0	244*68.8*38.8	12
HLG-320H-12A	90-305	1.65	320	12	22.0	252*90*43.8	9
HLG-320H-24A	90-305	1.65	320	24	13.34	252*90*43.8	9
HLG-480H-24A	90-305	2.45	480	24	20.0	262*125*43.8	4
HLG-600H-12A	90-305	3.3	600	12	40.0	280*144*48.5	4
HLG-600H-24A	90-305	3.3	600	24	25.0	280*144*48.5	4

XLG Series Power supply

MEANWELL XLG NON WATERPROOF LED POWER SUPPLY




Model Number	Input Voltage (ac v)	Input Current (A)	Power (W)	Output Voltage (dv v)	Related Current (A)	Dimensions (mm)	Package Qty (pcs)
XLG-75-12	100-305	0.45	75	12	5.0	140*63*32	24
XLG-75-24	100-305	0.45	75	24	3.1	140*63*32	24
XLG-100-12	100-305	0.5	100	12	8.0	140*63*32	24
XLG-100-24	100-305	0.5	100	24	4.0	140*63*32	24
XLG-150-12	100-305	1.00	150	12	12.5	180*63*35.5	16
XLG-150-24	100-305	1.00	150	24	6.25	180*63*35.5	16
XLG-200-12	100-305	1.10	200	12	16	199*63*35.5	16
XLG-200-24	100-305	1.10	200	24	8.3	199*63*35.5	16

# CONTROLLER



CONSTANT VOLTAGE RF CONTROLLER

DC VOLTAGE CONTROLLER

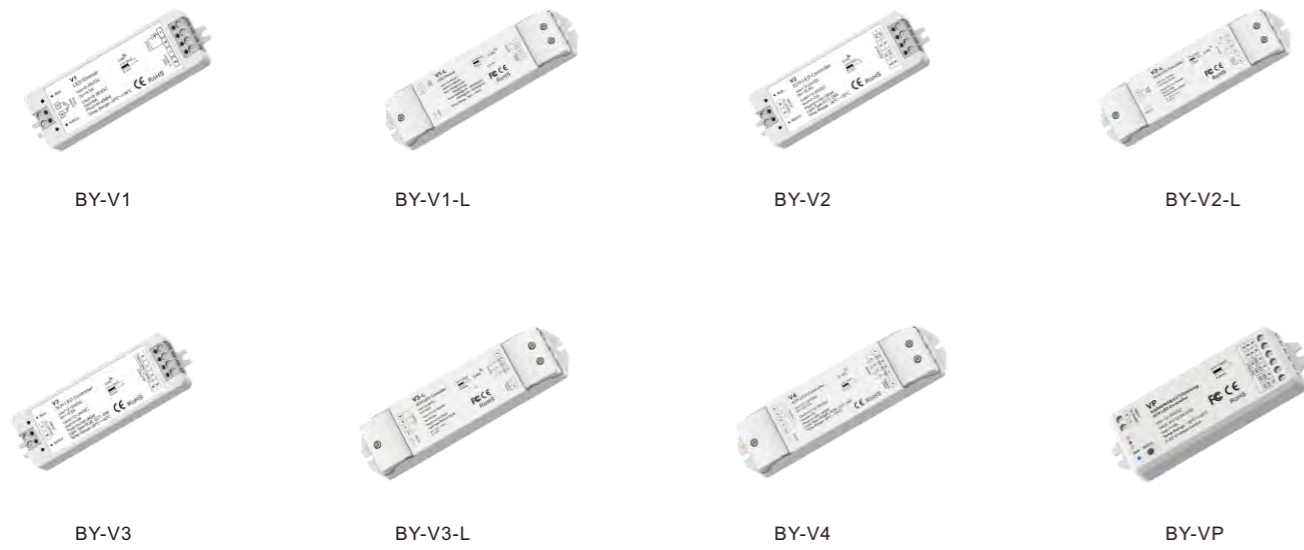


CONSTANT VOLTAGE RF LED CONTROLLER					
Model Number	Input Voltage (dc v)	Ch Qty (PC)	Output Current (A)	Output Power (W)	Dimension (mm)
BY-V1	5-36V	1CH	≤8A	5V<40W,12V<96,24V<192W, 36V<288W	97*33*18
BY-V1-L	12-24V	1CH	≤15A	12V<180W,24V<360W	175*45*27
BY-V2	12-24V	1CH	≤5A	12V<120W,24V<240W	97*33*18
BY-V2-L	12-36V	2CH	≤8A/CH	12V<192V,24V<384W, 36V<576W	170*50*23
BY-V3	12-24V	3CH	≤4A/CH	12V<144W,24V<288W	97*33*18
BY-V3-L	12-36V	3CH	≤6A/CH	12V<216W,24V<432,36V<648W	97*33*18
BY-V4	12-36V	4CH	≤5A/CH	12V<240V,24V<480W, 36V<720W	97*33*18
BY-VP	12-24V	4CH	≤4A/CH	12V<192W,24V<384W	114*38*20

RF REMOTE

FOR REMOTE FOR DC VOLTAGE RF REMOTE



RF REMOTE						
Model Number	Zone	Working Voltage (V)	Working Current (mA)	Standby Current (uA)	Standby Time (Year)	Dimension (mm)
BY-RT1	1 Zone DIM	3V DC(AAA*2)	<5mA	<10uA	1 Years	122*53*17.5
BY-RT6	4 Zone DIM	3V DC(AAA*2)	<5mA	<10uA	1 Years	122*53*17.5
BY-RT8	8 Zone DIM	3V DC(AAA*2)	<5mA	<10uA	1 Years	122*53*17.5
BY-RT2	1 Zone CCT	3V DC(AAA*2)	<5mA	<10uA	1 Years	22*53*17.5
BY-RT7	4 Zone CCT	3V DC(AAA*2)	<5mA	<10uA	1 Years	22*53*17.5
BY-RT8C	8 Zone CCT	3V DC(AAA*2)	<5mA	<10uA	1 Years	22*53*17.5
BY-RT4	1 Zone RGB/RGBW	3V DC(AAA*2)	<5mA	<10uA	1 Years	22*53*17.5
BY-RT9	4 Zone RGB/RGBW	3V DC(AAA*2)	<5mA	<10uA	1 Years	22*53*17.5

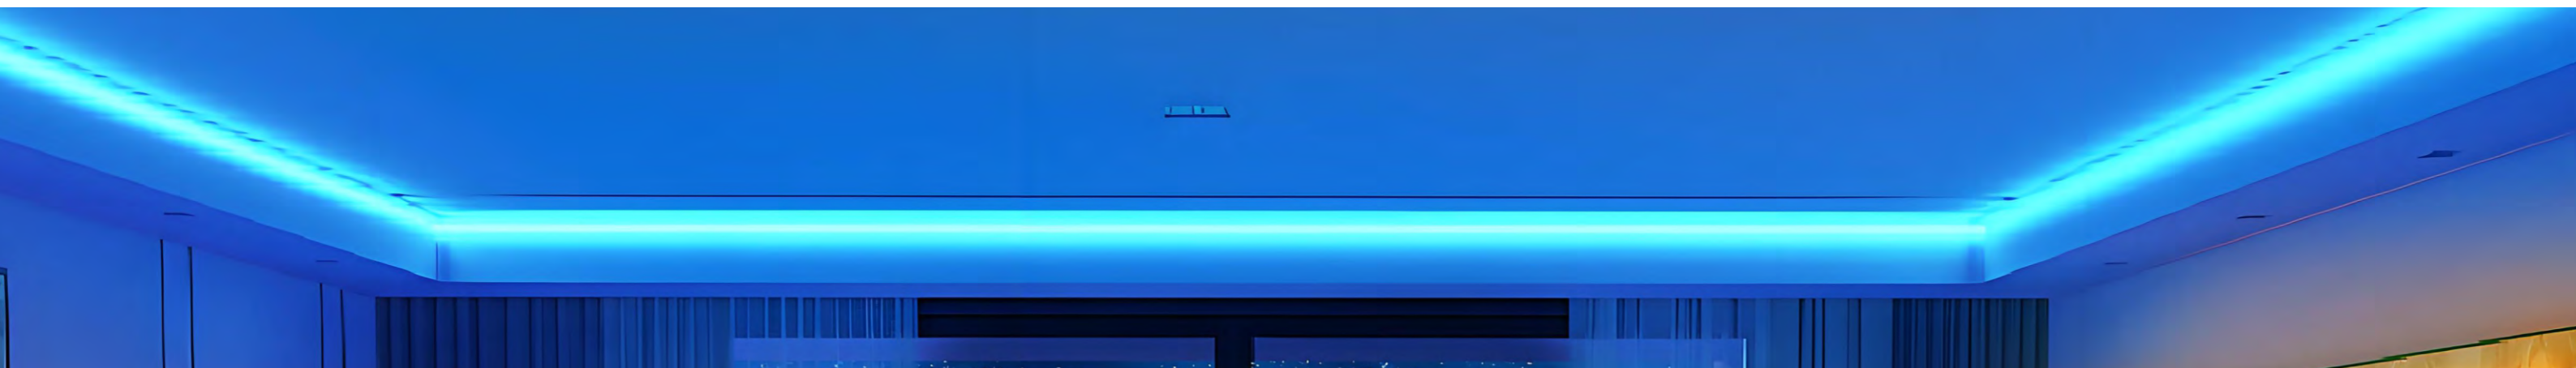

AC VOLTAGE CONTROLLER



BY-S3                      BY-S3(WT)                      BY-S1-HV                      BY-S4

AC VOLTAGE CONTROLLER					
Model Number	Input Voltage (dc v)	Ch Qty (PC)	Output Current (A)	Output Power (W)	Dimension (mm)
BY-S3	100-240VAC	3CH	1A/CH	3*(100-240)W	178*150*38
BY-S3(WT)	100-240VAC	3CH	1A/CH	3*(100-240)W	178*150*38
BY-S1-HV	100-240VAC	N / A	≤1.5A	1.5*(100-240)W	56*56*35
BY-S4	100-240VAC	4CH	1A/CH	4*(100-240)W	163*46*25



\*BY-RS4 only for BY-S4

BY-RS4

AC VOLTAGE RGBW LED STRIP CONTROLLER BY-RS4 FOR BY S4						
Model Number	Zone	Working Voltage (V)	Working Current (mA)	Standby Current (uA)	Standy Time (Year)	Dimension (mm)
BY-RS4	4 Zone RGB/RGBW	3V DC(AAA*2)	<8A	<5uA	1year	97*33*18

DIGITAL CONTROLLER



BY-SP108E                      BY-SP801E                      BY-SP659E

DIGITAL CONTROLLER				
Model Number	Working Voltage (V)	Supported Pixel Qty (PC)	Programmable	Dimension (mm)
BY-SP108E	5-24V DC	2048	Built-In	85*45*22
BY-SP801E	5-24V DC	4096	Program by APP	80*41*20
BY-SP659E	5-24V DC	4096	Program by APP	78*56*20



BY-K1000C                      BY-K4000C                      BY-K8000C                      BY-S8000L  
\*For DMX console

PROGRAMMABLE DIGITAL CONTROLLER				
Model Number	Working Voltage (V)	Supported Pixel Qty (PC)	Programmable	Dimension (mm)
BY-K1000C	5-24V DC	1024	Program by software	159*89*24
BY-K4000C	5-24V DC	4096	Program by software	215*146*30
BY-K8000C	5-24V DC	8192	Program by software	180*120*30
BY-S8000L	5-24V DC	8192	Program by software	292*170*50



BY-XB809                      BY-T790  
\*Master controller                      \*Sub controller

MASTER CONTROLLER AND SUB CONTROLLER				
Model Number	Working Voltage (V)	Supported Pixel Qty (PC)	Type	Dimension (mm)
BYXB809 ( MASTER )	110-240 AC	N / A	Master	260*160*52
BY-T790 ( SUB )	5-24V DC	8192	Sub	310*152*42



# DIGITAL LED STRIP LIGHT

SPI and DMX512

# DIGITAL LED STRIP LIGHT



External IC, one IC is controlled separately as one pixel in running strip light.

VCC: 5V, 12V, 24V is optional  
DI: main data Input  
BI: sub data input  
GND: the Ground


Unlike normal strip light, the digital strip will run as arrow direction. It will not work if reverse



Built-in IC was packed inside LED, one IC is controlled separately as one pixel in running strip light.


VCC: 5V, 12V, 24V is optional  
DI: main data Input  
BI: sub data input  
GND: the Ground

Unlike normal strip light, the digital strip will run as arrow direction. It will not work if reverse



# DIGITAL STRIP LIGHT SYSTEM

STRIP LIGHT SOLUTION

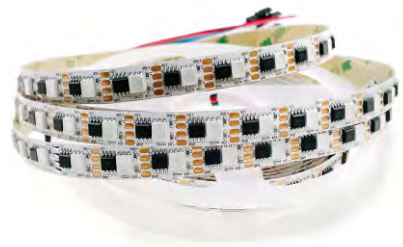

CONTROLLER SOLUTION




LED DRIVER SOLUTION




## HOW TO CONNECT THEM?

Programmable controller

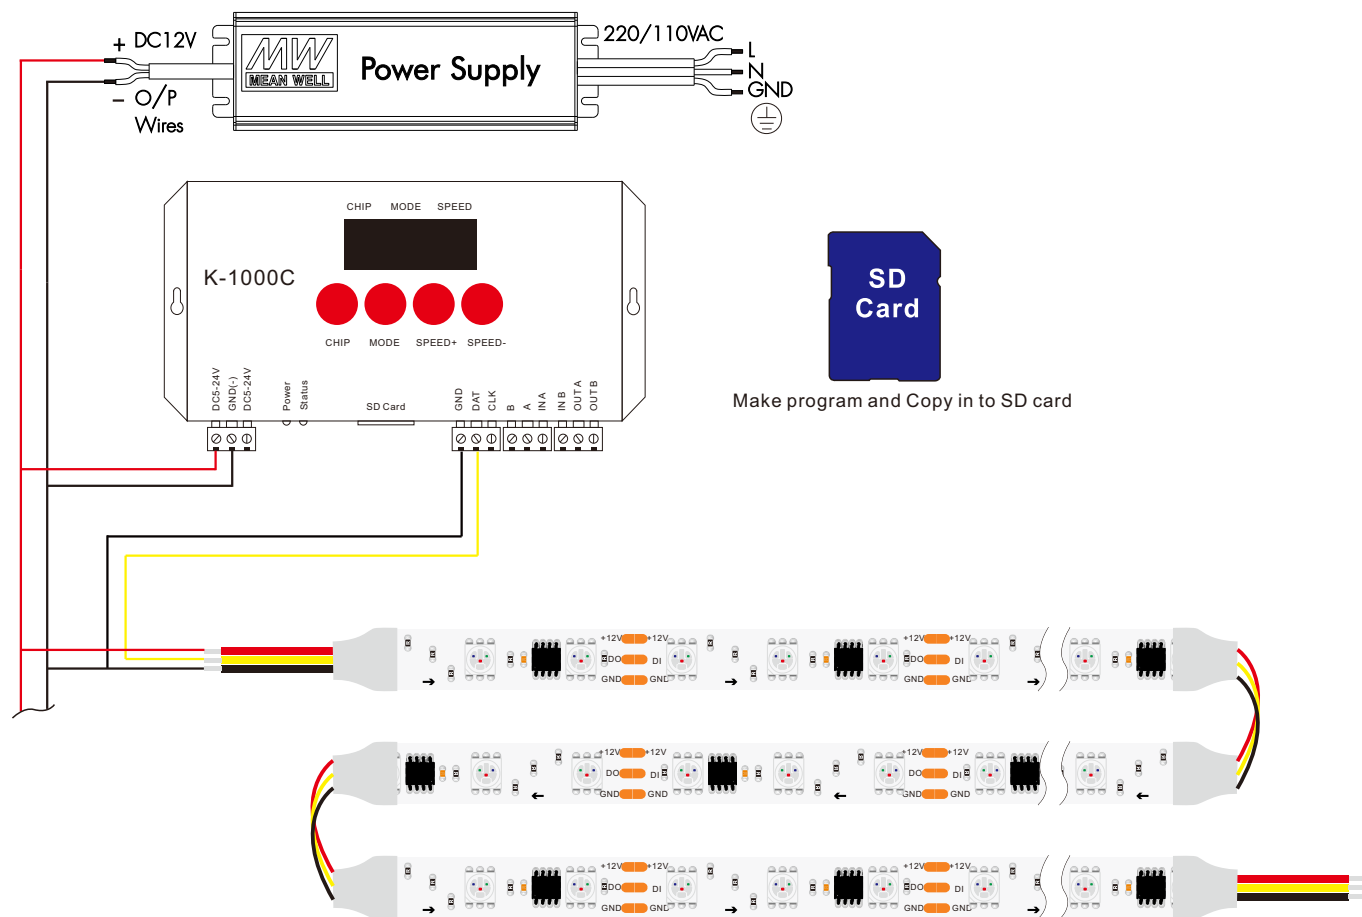

All strip in one port will be connected in series  
Each 5 meter need power feed

Non-Programmable controller

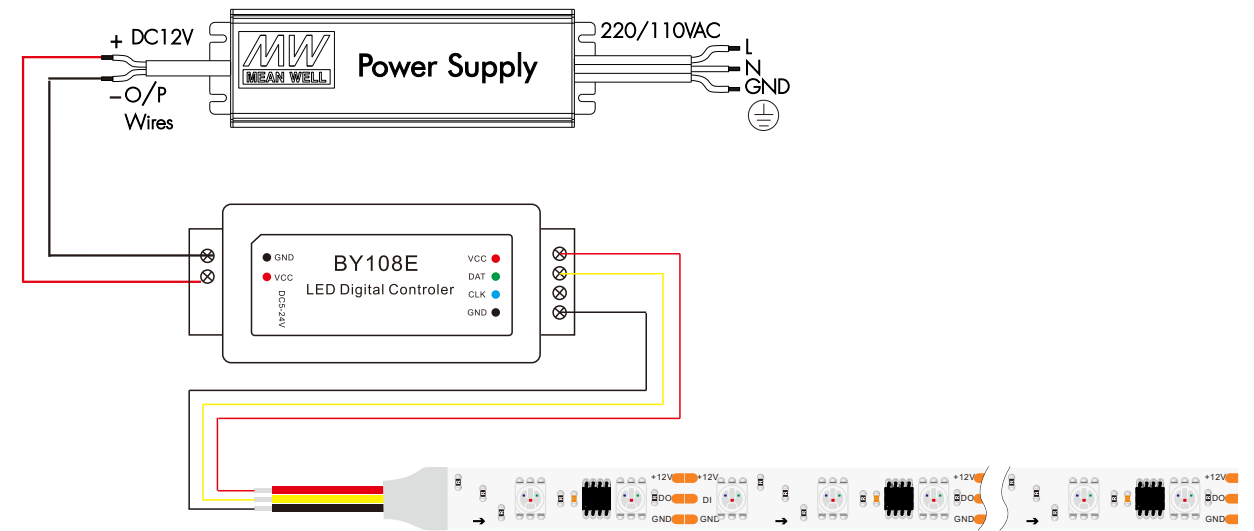

## What is difference for 3lines,4 lines and 5lines?

3 lines is standard Digital SPI strip light with one signal wire. The IC is like WS2811, WS2813, SK6812, ect



4lines is digital SPI strip light with double signal wire, and there is function of break-point continues transmission. if one LED is damaged, the following led still can work, the IC like Tm1934, WS2815, Sk6813.

5line is digital DMX strip light and work with DMX512 protocol, the IC is like USC512 and TM512 ect

# EXTERNAL SPI LED STRIP



5050 WHITE COLOR 10 MM 60LED DIGITAL

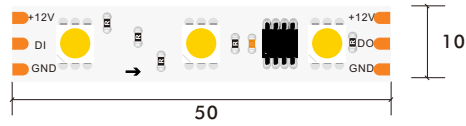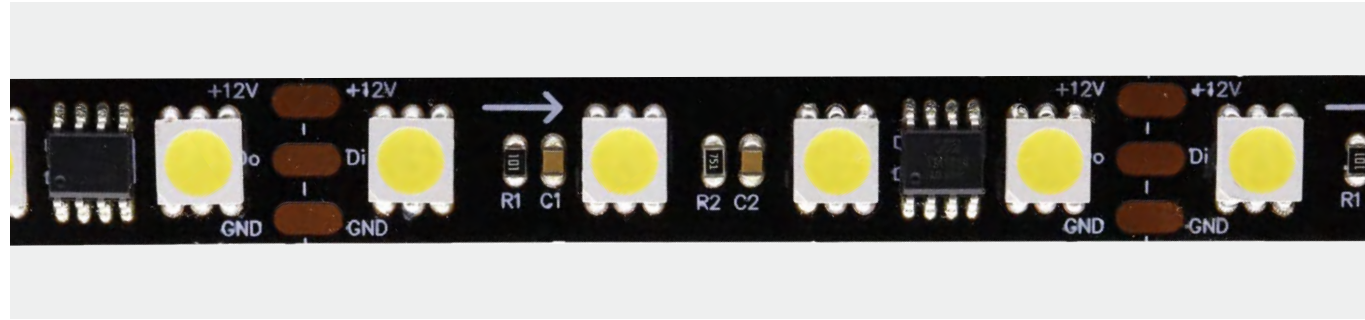

WS2811


UCS1903



12V DC 20 Pixel 3 Line 10mm 5050 60LED White Color 20pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-505027-012AD-060S-MY3-3X20	12	12	60	1152	80	2700	80/90	50	120
S10WXX-505030-012AD-060S-MY3-3X20	12	12	60	1224	85	3000	80/90	50	120
S10WXX-505040-012AD-060S-MY3-3X20	12	12	60	1296	90	4000	80/90	50	120
S10WXX-505060-012AD-060S-MY3-3X20	12	12	60	1224	85	6000	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

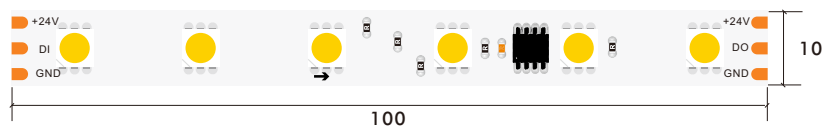

WS2811


UCS1903



24V DC 10 Pixel 3 Line 10mm 5050 60LED White Color 10pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-505027-024AD-060S-MY3-3X10	24	12	60	1152	80	2700	80/90	100	120
S10WXX-505030-024AD-060S-MY3-3X10	24	12	60	1224	85	3000	80/90	100	120
S10WXX-505040-024AD-060S-MY3-3X10	24	12	60	1296	90	4000	80/90	100	120
S10WXX-505060-024AD-060S-MY3-3X10	24	12	60	1224	85	6000	80/90	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under Ip20. it is different with Ip65, Ip66, Ip67, IP68

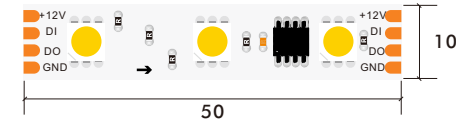


TM1934



12V DC 20 Pixel 4 Line 10mm 5050 60LED White Color 20pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-505027-012AD-060S-MY3-4X20	12	12	60	1152	80	2700	80/90	50	120
S10WXX-505030-012AD-060S-MY3-4X20	12	12	60	1224	85	3000	80/90	50	120
S10WXX-505040-012AD-060S-MY3-4X20	12	12	60	1296	90	4000	80/90	50	120
S10WXX-505060-012AD-060S-MY3-4X20	12	12	60	1224	85	6000	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

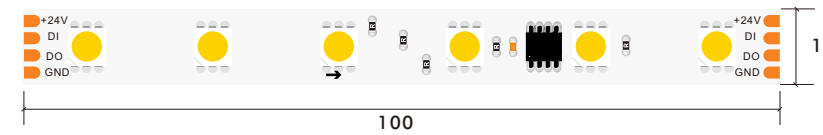


TM1934



24V DC 10 Pixel 4 Line 10mm 5050 60LED White Color 10pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-505027-024AD-060S-MY3-4X10	24	12	60	1152	80	2700	80/90	100	120
S10WXX-505030-024AD-060S-MY3-4X10	24	12	60	1224	85	3000	80/90	100	120
S10WXX-505040-024AD-060S-MY3-4X10	24	12	60	1296	90	4000	80/90	100	120
S10WXX-505060-024AD-060S-MY3-4X10	24	12	60	1224	85	6000	80/90	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

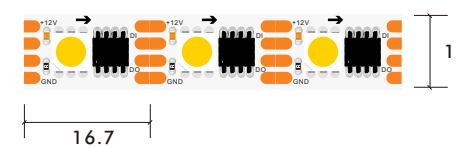

LB1908

GS8208





24V DC 60 Pixel 4 Line 10mm 5050 60LED White Color 60pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-505027-024AD-060S-MY3-4X60	12	14.4	60	1152	80	2700	80/90	16.7	120
S10WXX-505030-024AD-060S-MY3-4X60	12	14.4	60	1224	85	3000	80/90	16.7	120
S10WXX-505040-024AD-060S-MY3-4X60	12	14.4	60	1296	90	4000	80/90	16.7	120
S10WXX-505060-024AD-060S-MY3-4X60	12	14.4	60	1224	85	6000	80/90	16.7	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


2835 WHITE COLOR 8 / 10 MM 120LED DIGITAL STRIP

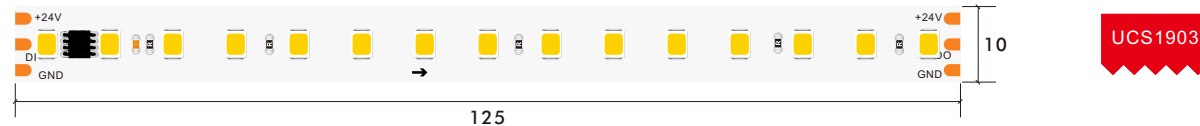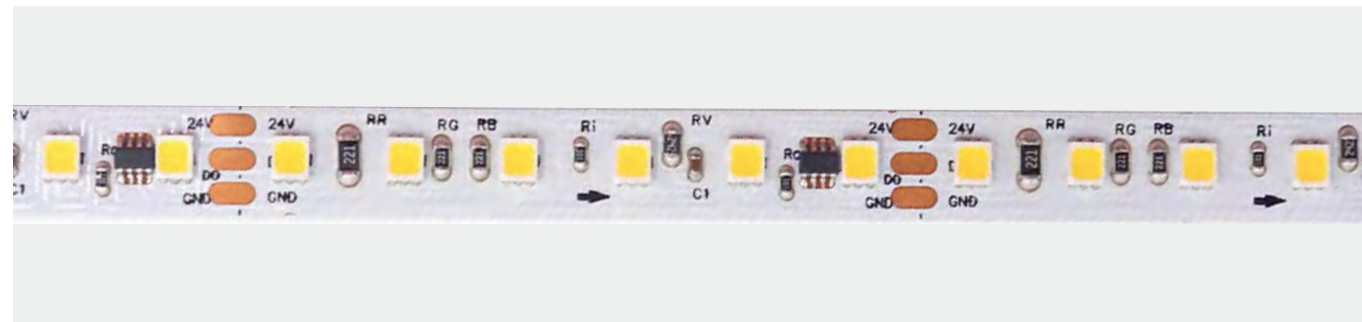

**10mm 2835 120LED White Color 8pixels Digital Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-283527-024AD-120S-MY3-3X08	24	10	120	1440	80	2700	80/90	125	120
S10WXX-283530-024AD-120S-MY3-3X08	24	10	120	1530	85	3000	80/90	125	120
S10WXX-283540-024AD-120S-MY3-3X08	24	10	120	1620	90	4000	80/90	125	120
S10WXX-283560-024AD-120S-MY3-3X08	24	10	120	1530	85	6000	80/90	125	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

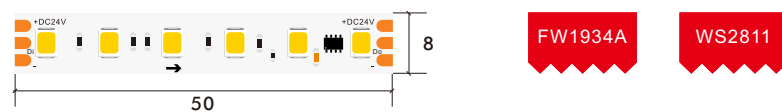

**8mm 2835 120LED White Color 20pixels Digital Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S08WXX-283527-024AD-120S-MY3-3X20	24	12	120	1152	80	2700	80/90	50	120
S08WXX-283530-024AD-120S-MY3-3X20	24	12	120	1224	85	3000	80/90	50	120
S08WXX-283540-024AD-120S-MY3-3X20	24	12	120	1296	90	4000	80/90	50	120
S08WXX-283560-024AD-120S-MY3-3X20	24	12	120	1224	85	6000	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




**8mm 2835 120LED White Color 20pixels Digital Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S08WXX-505027-024AD-120S-MY3-4X20	24	10	120	1152	80	2700	80/90	50	120
S08WXX-505030-024AD-120S-MY3-4X20	24	10	120	1224	85	3000	80/90	50	120
S08WXX-505040-024AD-120S-MY3-4X20	24	10	120	1296	90	4000	80/90	50	120
S08WXX-505060-024AD-120S-MY3-4X20	24	10	120	1224	85	6000	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 WHITE COLOR 8MM 144LED DIGITAL STRIP


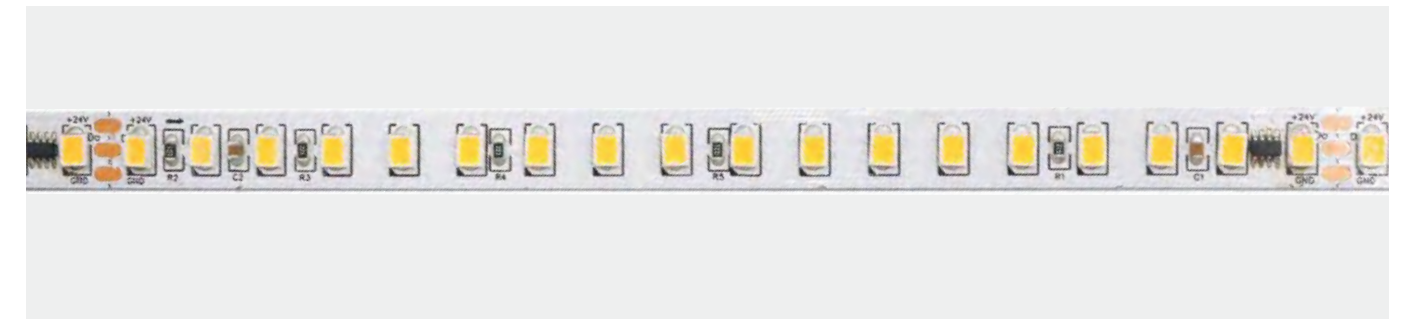


**8mm 2835 144LED White Color 8pixels Digital Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S08WXX-505027-024AD-144S-MY3-4X08	24	8.2	144	1920	80	2700	80/90	125	120
S08WXX-505030-024AD-144S-MY3-4X08	24	8.2	144	2040	85	3000	80/90	125	120
S08WXX-505040-024AD-144S-MY3-4X08	24	8.2	144	2160	90	4000	80/90	125	120
S08WXX-505060-024AD-144S-MY3-4X08	24	8.2	144	2040	85	6000	80/90	125	120


\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 WHITE COLOR 20 MM 360LED DIGITAL STRIP

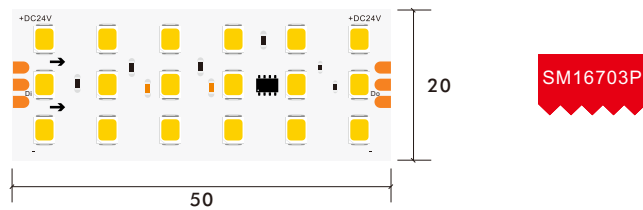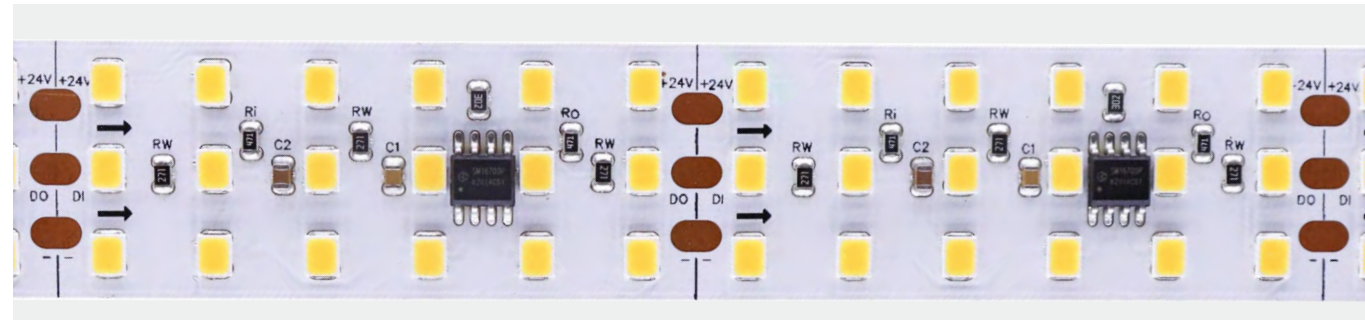

24V DC	20 Pixel	3 Line	20mm 2835 360LED White Color 20pixels Digital Strip	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
				S20WXX-283527-024AD-360T-MY3-3X20	24	25	360	2000	80	2700	80/90	50	120
				S20WXX-283530-024AD-360T-MY3-3X20	24	25	360	2125	85	3000	80/90	50	120
				S20WXX-283540-024AD-360T-MY3-3X20	24	25	360	2250	90	4000	80/90	50	120
				S20WXX-283560-024AD-360T-MY3-3X20	24	25	360	2125	85	6000	80/90	50	120



\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

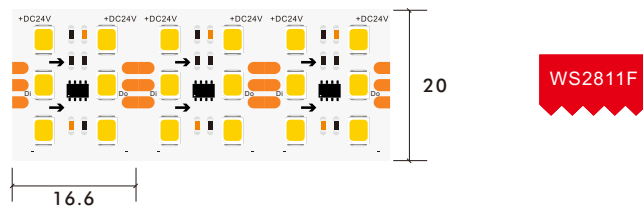

24V DC	60 Pixel	3 Line	20mm 2835 120LED White Color 60pixels Digital Strip	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
				S20WXX-283527-024AD-360T-MY3-3X60	24	22	360	1760	80	2700	80/90	16.6	120
				S20WXX-283530-024AD-360T-MY3-3X60	24	22	360	1870	85	3000	80/90	16.6	120
				S20WXX-283540-024AD-360T-MY3-3X60	24	22	360	1980	90	4000	80/90	16.6	120
				S20WXX-283560-024AD-360T-MY3-3X60	24	22	360	1870	85	6000	80/90	16.6	120


\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

3527 CCT COLOR 8 MM 120LED DIGITAL STRIP

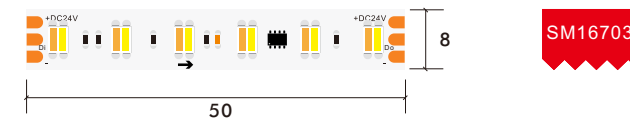
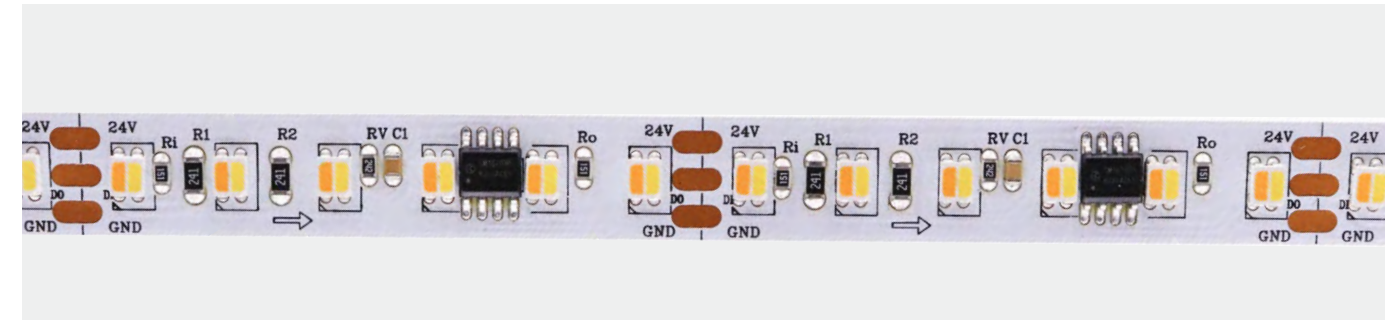


24V DC	20 Pixel	3 Line	8mm 3527 120LED Cct Color 20pixels Digital Strip	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
				S08WXX-3527TW-024AD-120S-MY3-3X30	24	18.7	120	1490	80	CCT	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

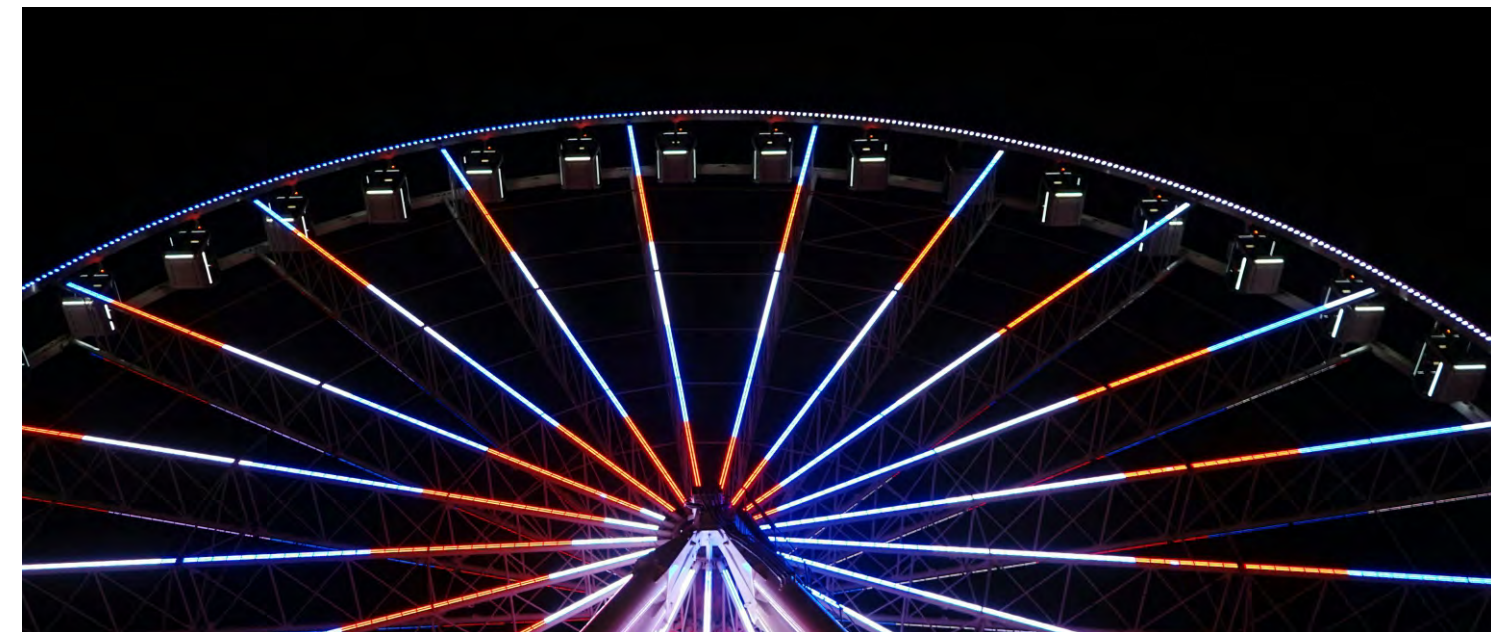

5050 TRIPLE WHITE 10 MM 60LED DIGITAL STRIP

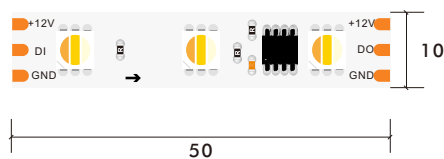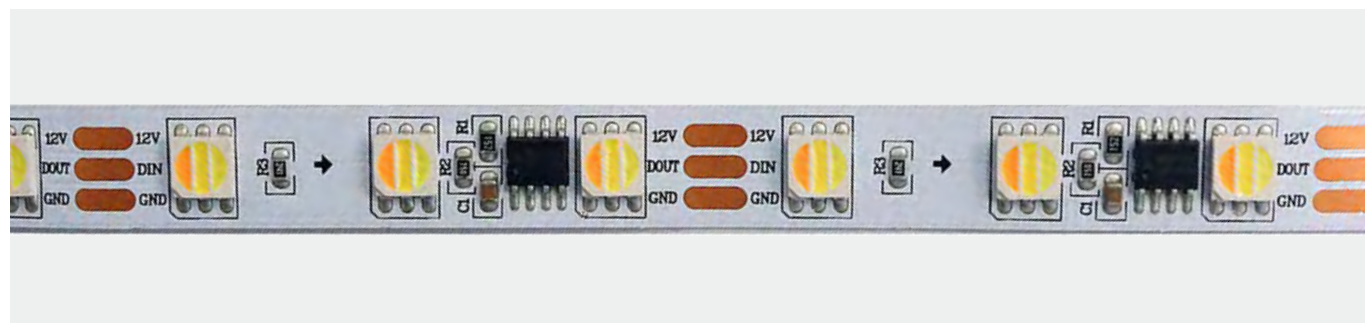


UCS1903



12V DC 20 Pixel 3 Line 10mm 5050 60LED Triple White Color 20pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-50503W-012AD-060S-MY3-3X20	12	12	60	1152	80	Triple White	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

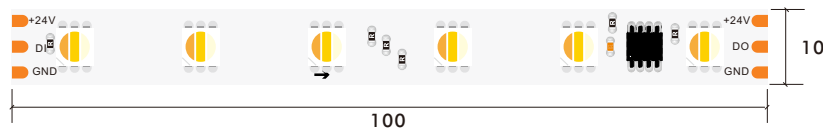


UCS1903



24V DC 10 Pixel 3 Line 10mm 5050 60LED Triple White Color 10pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-50503W-024AD-060S-MY3-3X10	24	12	60	1152	80	Triple White	80/90	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

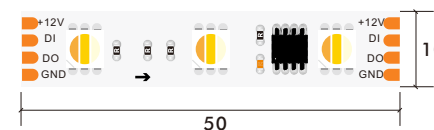


TM1934





12V DC 20 Pixel 4 Line 10mm 5050 60LED Triple White 20pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-50503W-012AD-060S-MY3-4X20	12	12	60	960	80	Triple White	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

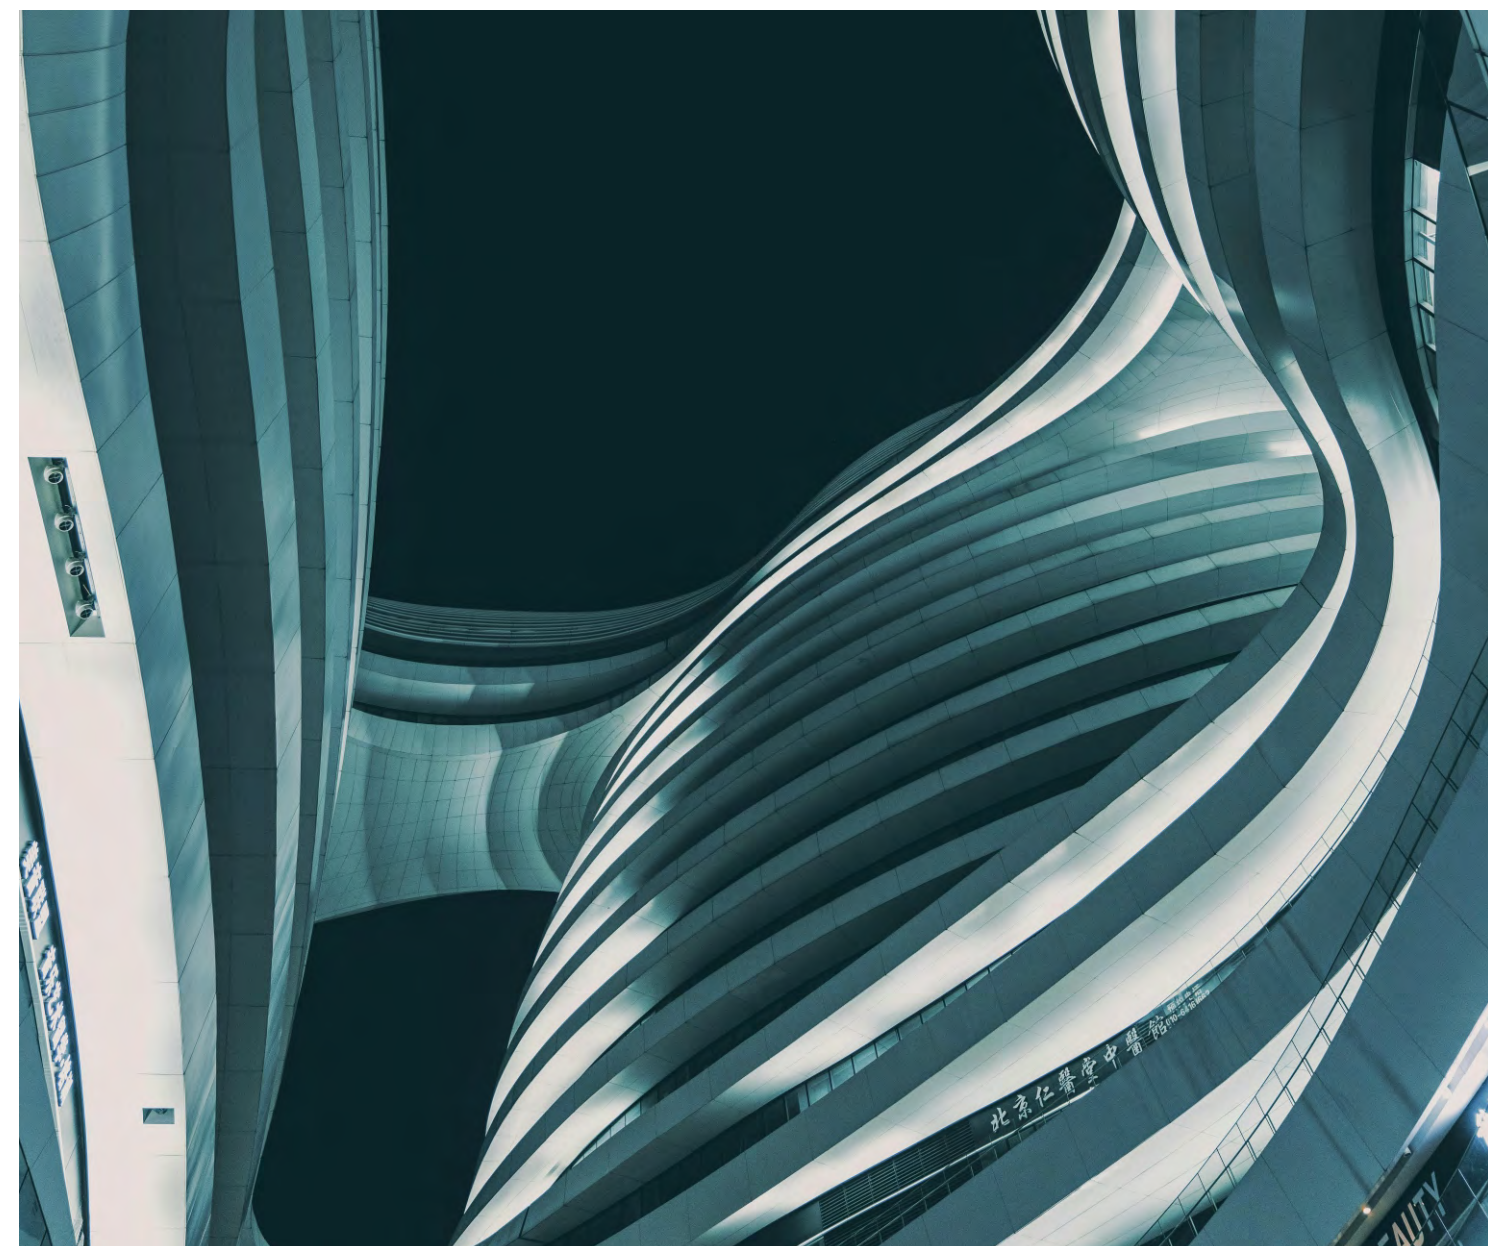

5050 RGB 10 MM 60LED DIGITAL STRIP

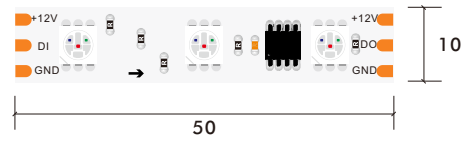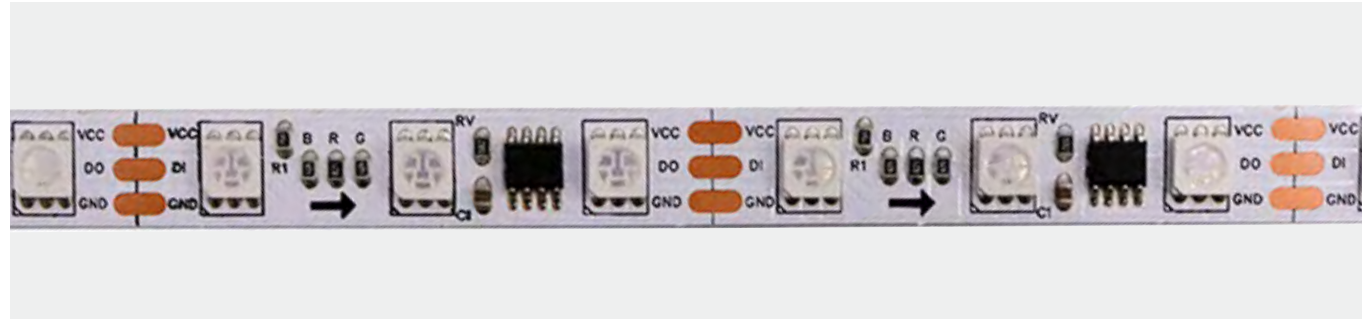


WS2811

UCS1903



12V DC	20 Pixel	3 Line	10mm 5050 60LED RGB Color 20pixels Digital Strip							
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-5050TC-012AD-060S-MY3-3X20	12	14.4	60	N/A	N/A	RGB	80/90	50	120	

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

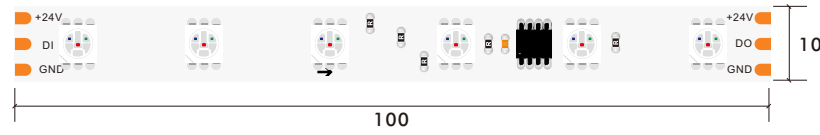


WS2811

UCS1903



24V DC	10 Pixel	3 Line	10mm 5050 60LED RGB Color 10pixels Digital Strip							
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-5050TC-024AD-060S-MY3-3X10	24	14.4	60	N/A	N/A	RGB	80/90	100	120	

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

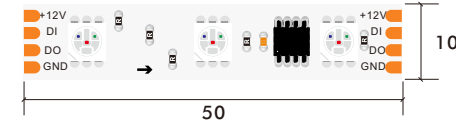


TM1934



12V DC	20 Pixel	4 Line	10mm 5050 60LED RGB Color 20pixels Digital Strip							
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-5050TC-012AD-060S-MY3-4X20	12	12	60	N/A	N/A	RGB	80/90	50	120	

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

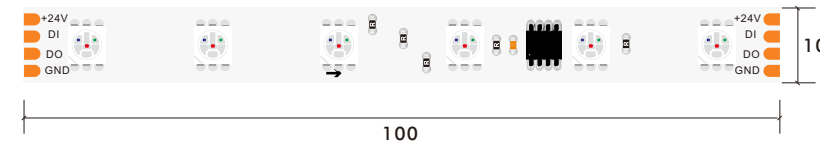


TM1934



24V DC	10 Pixel	4 Line	10mm 5050 60LED RGB Color 10pixels Digital Strip							
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-5050TC-024AD-060S-MY3-4X10	24	12	60	N/A	N/A	RGB	80/90	100	120	

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

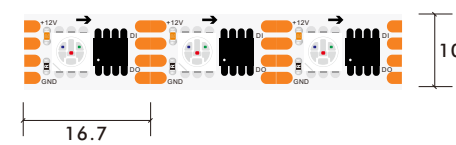

LB1908



GS8208



12V DC	60 Pixel	4 Line	10mm 5050 60LED RGB Color 60pixels Digital Strip							
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)	
S10WXX-5050TC-012AD-060S-MY3-4X60	12	14	60	N/A	N/A	RGB	80/90	100	120	

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 RGB COLOR 8/10 MM 120LED DIGITAL STRIP

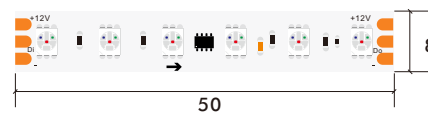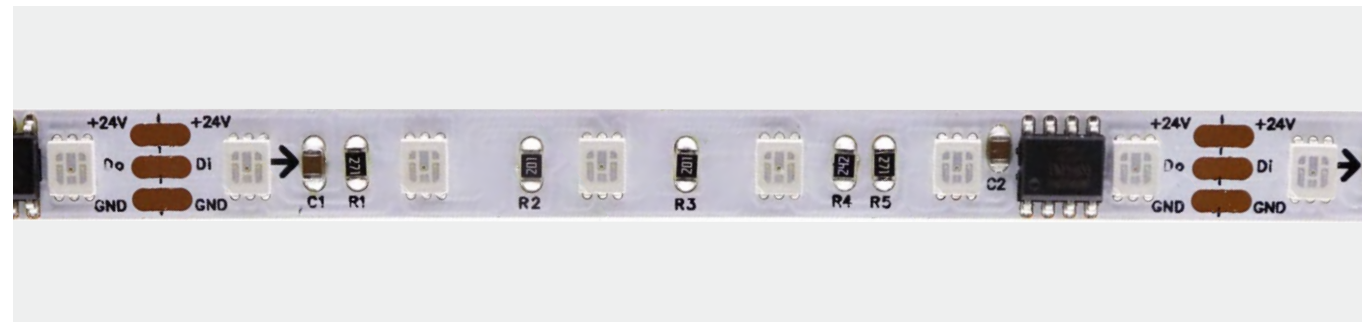


FW1903PE

WS2811



12V DC	20 Pixel	3 Line	8mm 2835 120LED RGB Color 20pixels Digital Strip						
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-2835TC-012AD-120S-MY3-3X20	12	10	120	N/A	N/A	RGB	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

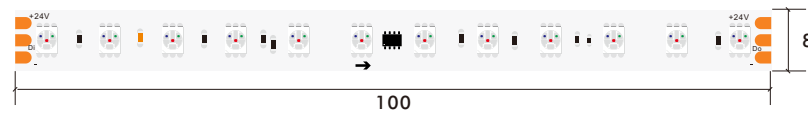


FW1903P



24V DC	10 Pixel	3 Line	8mm 2835 120LED RGB Color 10pixels Digital Strip						
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-2835TC-024AD-120S-MY3-3X10	24	11.5	120	N/A	N/A	RGB	80/90	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

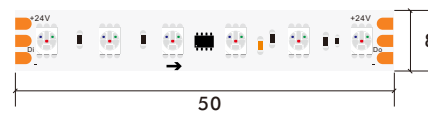


FW1903P



24V DC	20 Pixel	3 Line	8mm 2835 120LED RGB Color 20pixels Digital Strip						
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08WXX-2835TC-024AD-120S-MY3-3X20	24	15	120	N/A	N/A	RGB	80/90	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

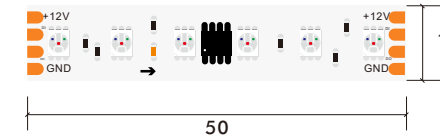


TM1934



12V DC	20 Pixel	4 Line	10mm 2835 120LED RGB Color 20pixels Digital Strip						
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-2835TC-012AD-120S-MY3-4X20	24	11	120	N/A	N/A	RGB	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

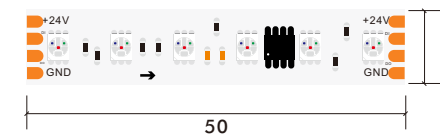


TM1934



24V DC	20 Pixel	4 Line	10mm 2835 120LED RGB Color 20pixels Digital Strip						
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-2835TC-024AD-120S-MY3-4X20	24	22	120	N/A	N/A	RGB	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

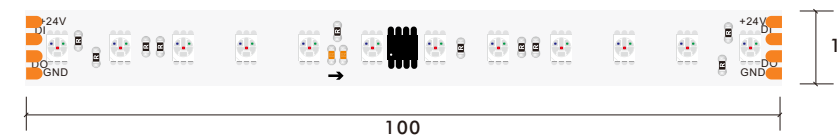

TM1934




24V DC	10 Pixel	4 Line	10mm 2835 120LED RGB Color 10pixels Digital Strip						
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-2835TC-024AD-120S-MY3-4X10	24	11	120	N/A	N/A	RGB	80/90	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



5050 RGB COLOR 20 MM 120LED DIGITAL STRIP

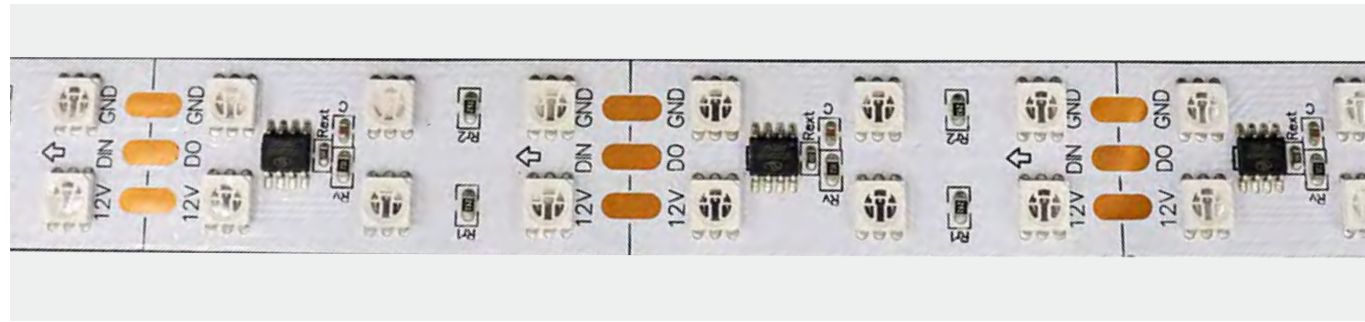


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S20WXX-5050TC-012AD-120D-MY3-3X20	12	20	120	N/A	N/A	RGB	N/A	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S20WXX-5050TC-012AD-120D-MY3-3X30	12	19	120	N/A	N/A	RGB	N/A	33.3	120


\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

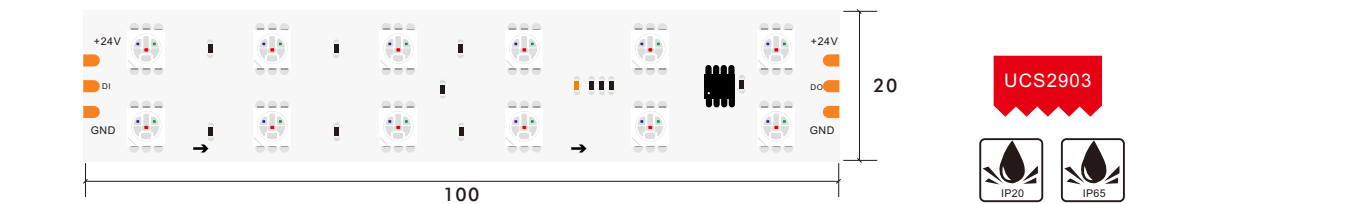

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S20WXX-5050TC-024AD-120D-MY3-3x10	24	16	120	N/A	N/A	RGB	N/A	100	120


\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 RGB COLOR 20 MM 240LED DIGITAL STRIP

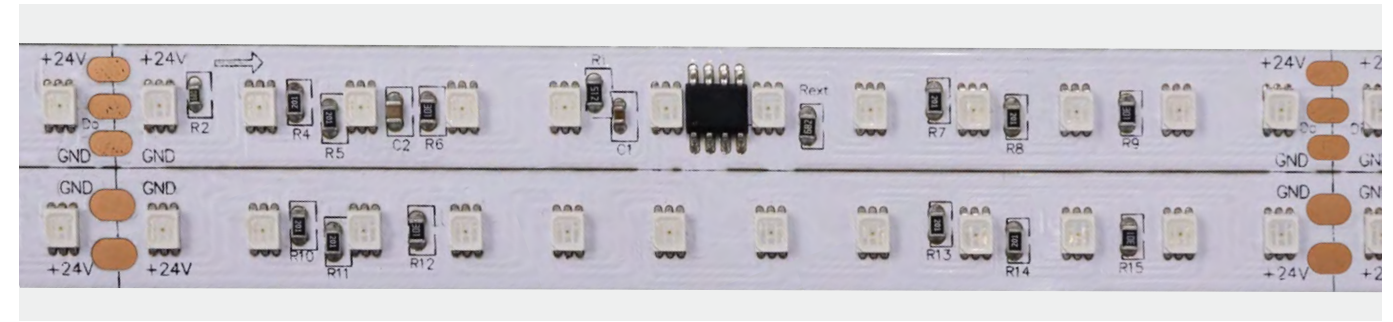


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S20WXX-5050TC-024AD-240D-MY3-3X20	12	20	240	N/A	N/A	RGB	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

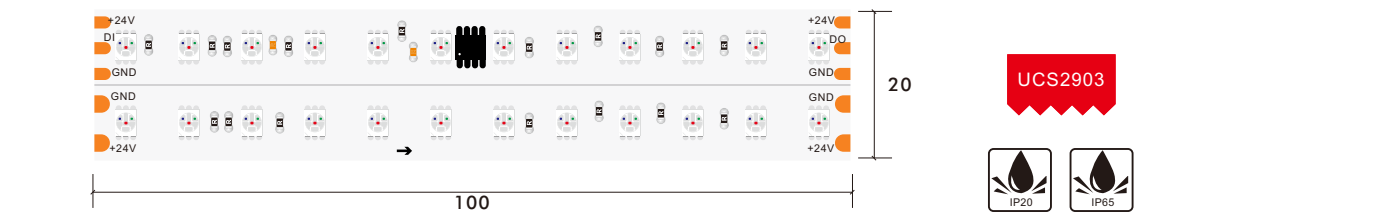


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S20WXX-2835TC-024AD-240D-MY3-3X10	24	20	240	N/A	N/A	RGB	80/90	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

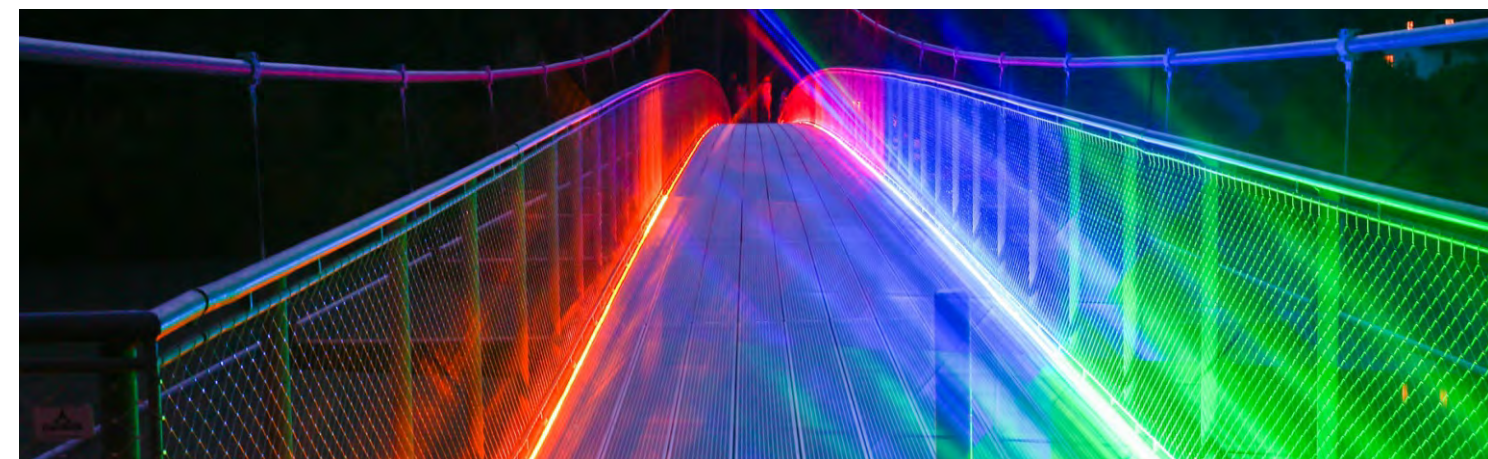

5050 RGBW COLOR 10 MM 60LED DIGITAL STRIP

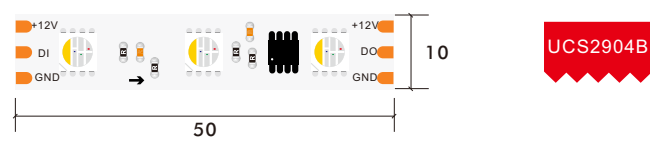


UCS2904B



12V DC 20 Pixel 3 Line 10mm 5050 60LED RGBW Color 20pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-5050MC-012AD-060S-MY3-3X20	12	18	60	N/A	N/A	RGBW	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

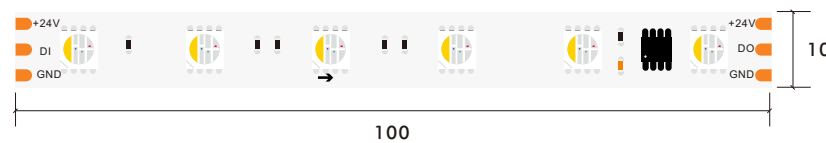


UCS2904B



24V DC 10 Pixel 3 Line 10mm 5050 60LED RGB Color 10pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-5050MC-024AD-060S-MY3-3X10	24	16	60	N/A	N/A	RGBW	80/90	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

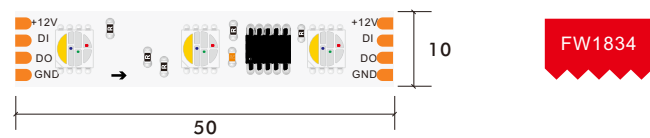


FW1834



12V DC 20 Pixel 4 Line 10mm 5050 60LED RGBW Color 20pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-5050MC-024AD-060S-MY3-4X20	12	10	60	N/A	N/A	RGBW	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

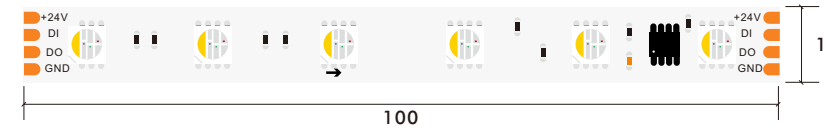

FW1834




24V DC 10 Pixel 4 Line 10mm 5050 60LED RGBW Color 10pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-5050MC-024AD-060S-MY3-4X10	24	10	60	N/A	N/A	RGBW	80/90	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

5050 RGBW COLOR 10 MM 72LED DIGITAL STRIP

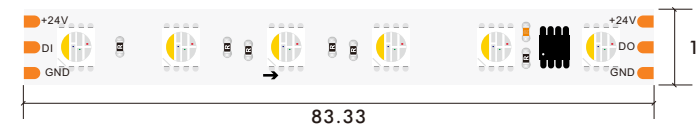

UCS2904B





24V DC 12 Pixel 3 Line 10mm 5050 60LED RGBW Color 12pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-5050MC-024AD-072S-MY3-3X12	24	22	72	N/A	N/A	RGBW	80/90	83.3	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

5050 RGBW COLOR 8/10/12 MM 84LED DIGITAL STRIP

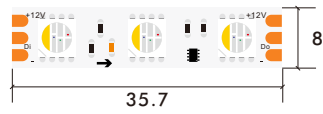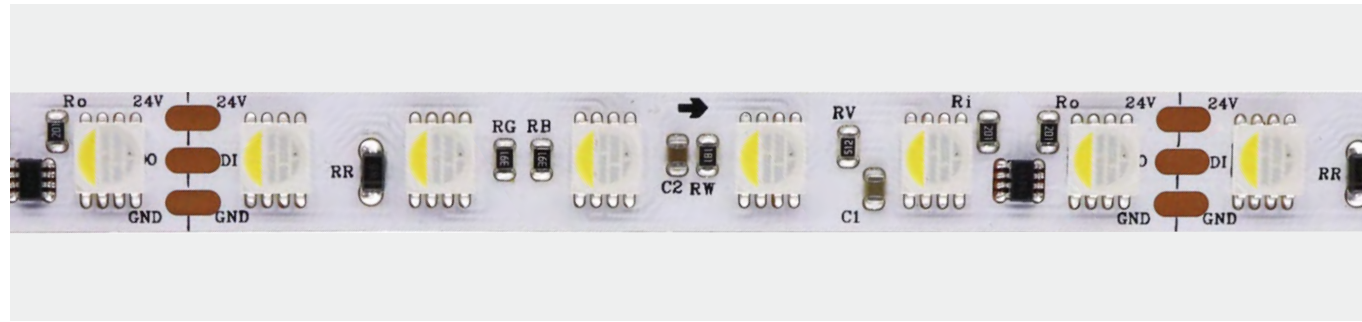

TM1824P




12V DC 28 Pixel 3 Line

**8mm 5050 84LED RGBW Color 28pixels Digital Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S08WXX-5050MC-012AD-084S-MY3-3X28	12	13.8	84	N/A	N/A	RGBW	80/90	35.7	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

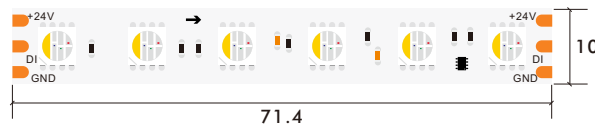

TM1824P




24V DC 14 Pixel 3 Line

**10mm 5050 60LED RGBW Color 14pixels Digital Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-5050MC-024AD-084S-MY3-3X14	24	14	84	N/A	N/A	RGBW	80/90	71.4	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

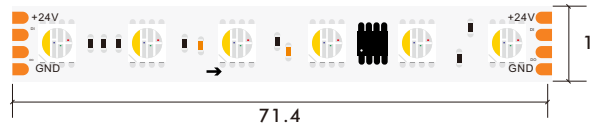

UCS2904B





24V DC 14 Pixel 4 Line

**10mm 5050 84LED RGBW Color 14pixels Digital Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-5050MC-024AD-084S-MY3-4X14	24	15	84	N/A	N/A	RGBW	80/90	71.4	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

4040 RGBW COLOR 8 MM 120LED DIGITAL STRIP

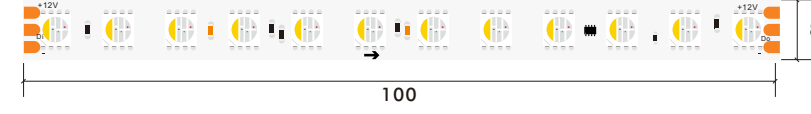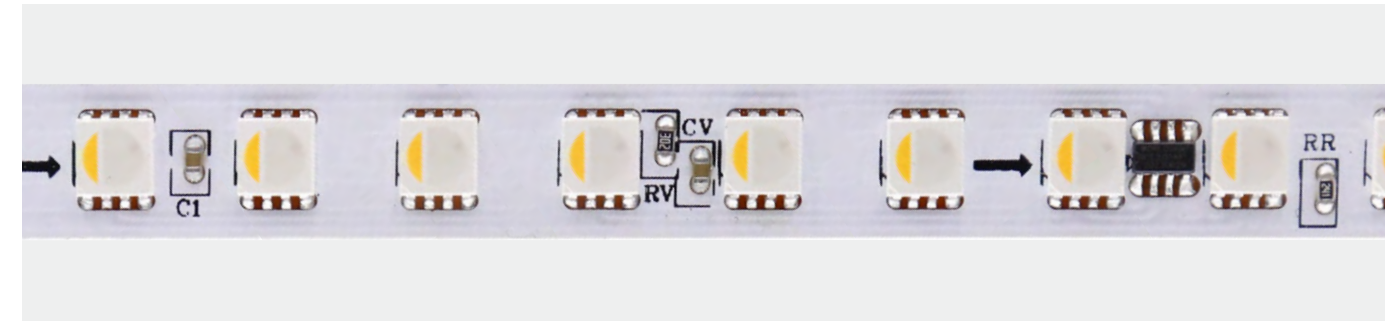

WS2814F




12V DC 10 Pixel 3 Line

**8mm 4040 120LED RGBW Color 10pixels Digital Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S08WXX-4040MC-012AD-120S-MY3-3X10	12	7.5	120	N/A	N/A	RGBW	80/90	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

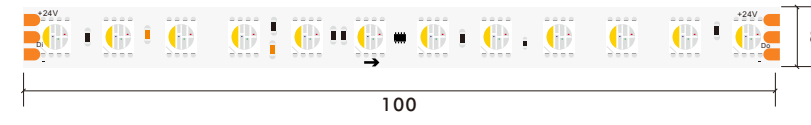

WS2814F




24V DC 10 Pixel 3 Line



**8mm 4040 120LED RGBW Color 10pixels Digital Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S08WXX-4040MC-024AD-120S-MY3-3X10	24	15	120	N/A	N/A	RGBW	80/90	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

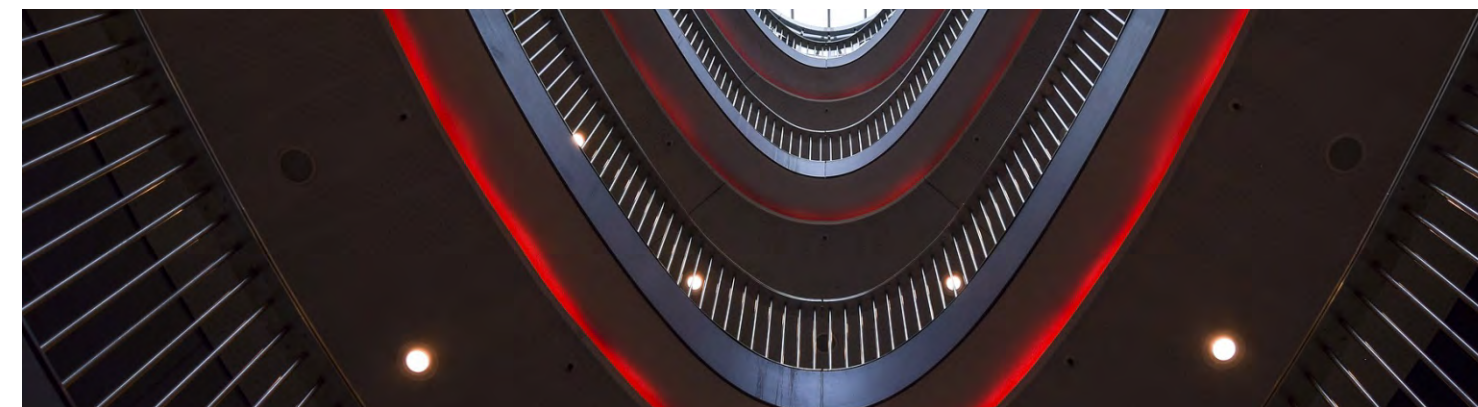

5050 RGBCCT 10 MM 60LED DIGITAL

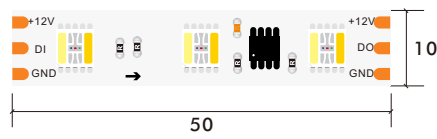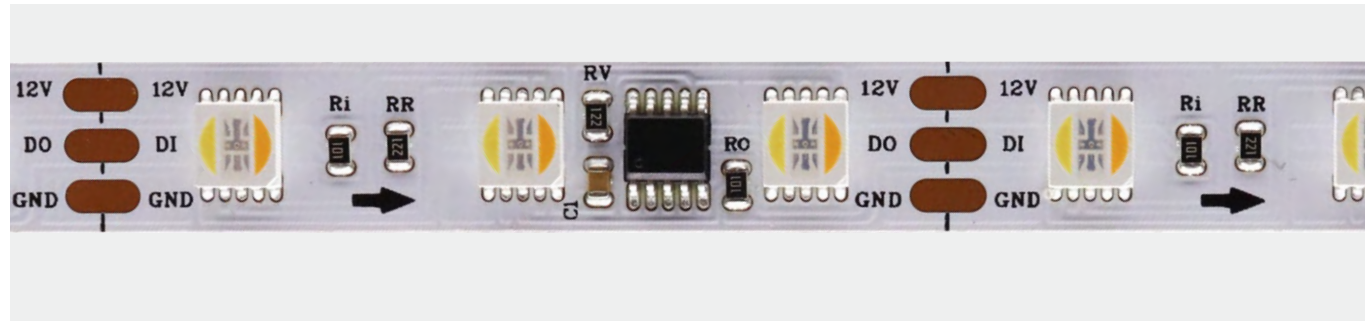


FW1906



**12V DC 20 Pixel 3 Line 10mm 5050 60LED RGBWW Color 20pixels Digital Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-5050FC-012AD-060S-MY3-3X20	12	22	60	N/A	N/A	RGBCCT	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

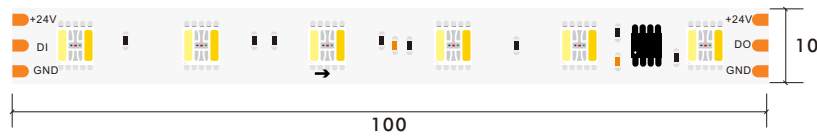

FW1906




**24V DC 10 Pixel 3 Line 10mm 5050 60LED RGBWW Color 10pixels Digital Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-5050FC-024AD-060S-MY3-3X10	24	22	60	N/A	N/A	RGBCCT	80/90	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

5050 RGBCCT 12 MM 84LED DIGITAL STRIP

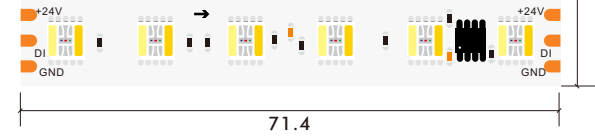


FW1906



**12V DC 14 Pixel 3 Line 12mm 5050 84LED RGBWW Color 14pixels Digital Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S12WXX-5050FC-024CV-084S-MY3-3X14	24	32	84	N/A	N/A	RGBCCT	80/90	71.4	120



\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

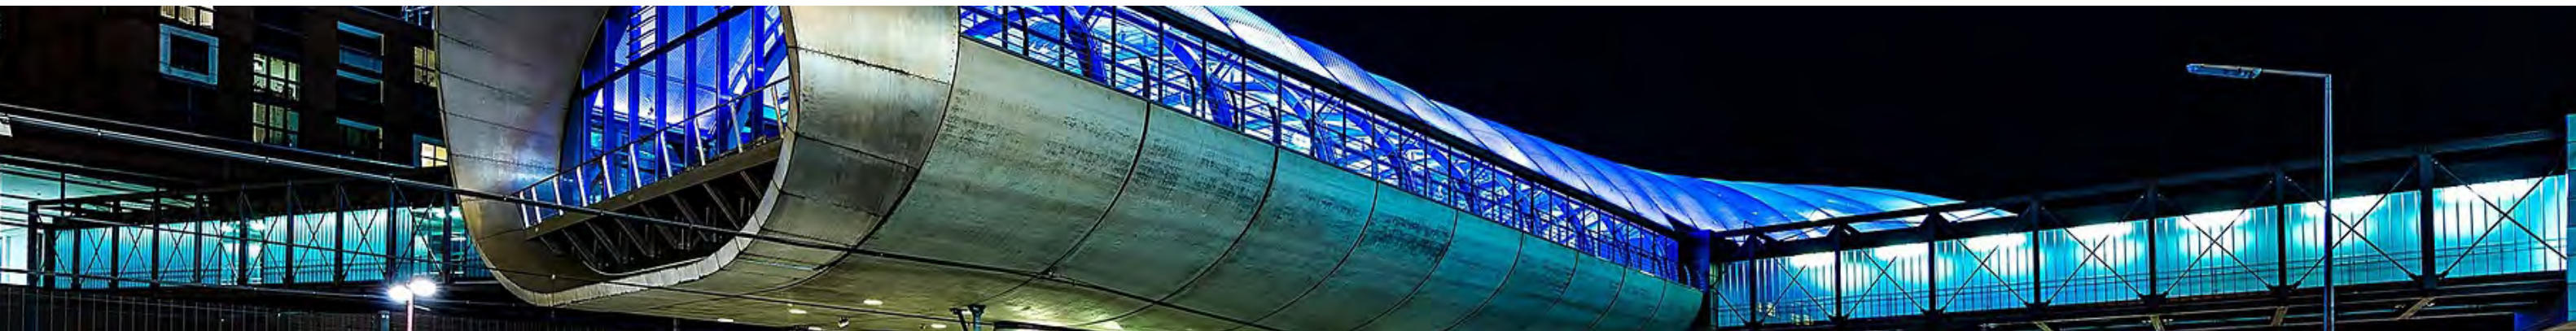

# INTERNAL SPI LED STRIP



5050 RGB COLOR 10 MM 60LED DIGITAL STRIP

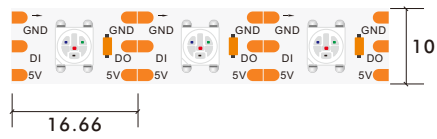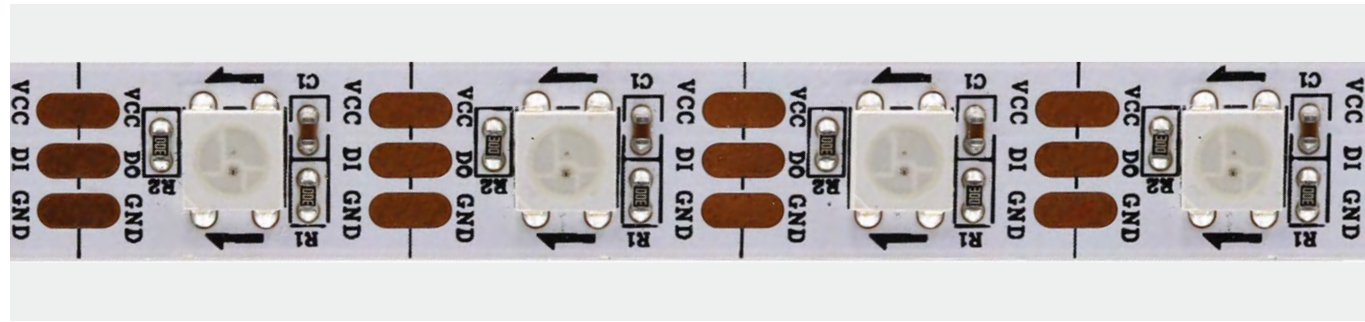

SK6812


WS2812



5V DC 60 Pixel 3 Line 10mm 5050 60LED RGB Color 60pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-5050TC-005AD-060S-MY3-3X60	5	14	60	N/A	N/A	RGB	80/90	16.6	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

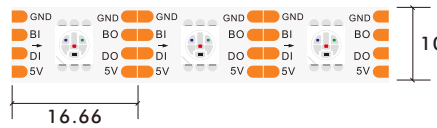

Ws2813

APA102


SK9822



5V DC 60 Pixel 4 Line 10mm 5050 60LED RGB Color 60pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-5050TC-005AD-060S-MY3-4X60	5	7	60	N/A	N/A	RGB	80/90	16.6	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

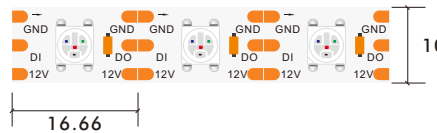


SK6812



12V DC 60 Pixel 3 Line 10mm 5050 60LED RGB Color 60pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-5050TC-012AD-060S-MY3-3X60	12	14	60	N/A	N/A	RGB	80/90	16.6	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

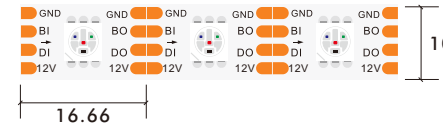

WS2815E

SK6813

GS8208





12V DC 60 Pixel 4 Line 10mm 5050 60LED RGB Color 60pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-5050TC-012CV-060S-MY3-4X60	12	14	60	N/A	N/A	RGB	80/90	16.66	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



5050 RGB COLOR 12MM 144LED DIGITAL STRIP

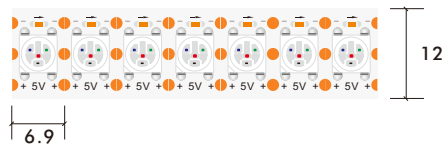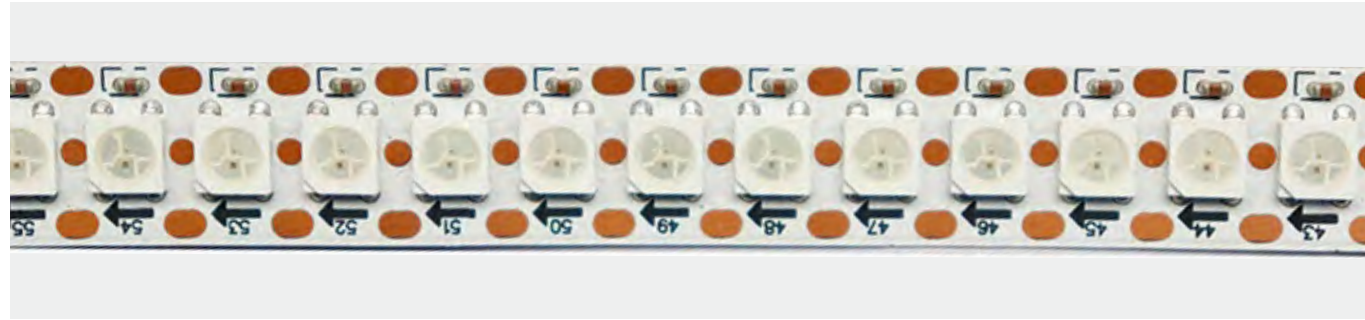


SK6812



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12WXX-5050TC-005AD-144S-MY3-3X144	5	24	144	N/A	N/A	RGB	80/90	6.9	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

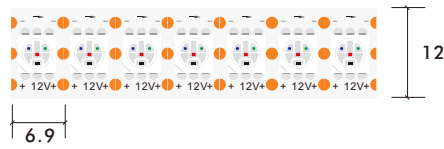


SK6812



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12WXX-2835TC-024AD-060S-MY3-3X144	24	25	144	N/A	N/A	RGB	80/90	6.9	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

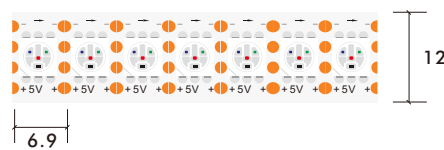


WS2813



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12WXX-5050TC-012AD-144S-MY3-4X144	12	25	144	N/A	N/A	RGB	80/90	6.9	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

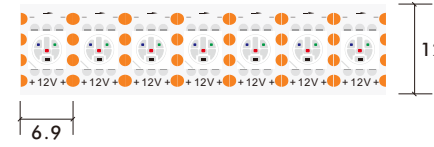

SK6813

SK6809




Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12WXX-5050TC-012AD-144S-MY3-4X144	12	25	144	N/A	N/A	RGB	80/90	6.9	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



3535 RGB COLOR 7 MM 144LED DIGITAL STRIP

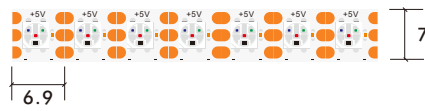


SK6812

5V DC 144 Pixel 3 Line 7mm 3535 144LED RGB Color 144pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S07WXX-3535TC-005AD-144S-MY3-3X144	5	20	144	N/A	N/A	RGB	N/A	6.9	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

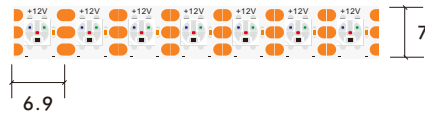

SK6812

SK6809





12V DC 144 Pixel 3 Line 7mm 3535 144LED RGB Color 144pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S07WXX-3535TC-012AD-144S-MY3-3X144	12	14	144	N/A	N/A	RGB	N/A	6.9	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

5050 RGBW COLOR DIGITAL STRIP

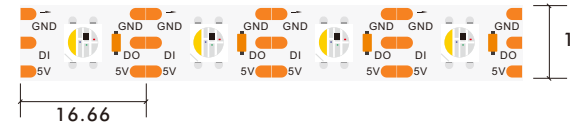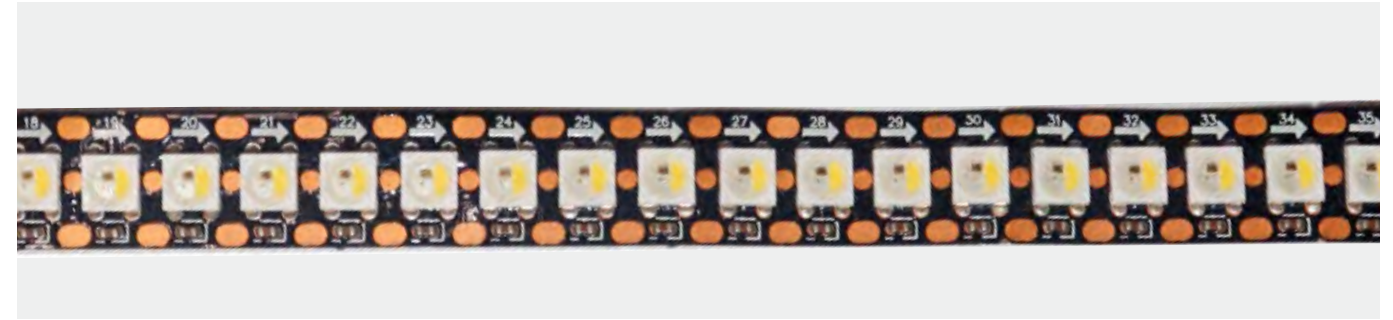


SK6812



5V DC 60 Pixel 3 Line 10mm 5050 60LED RGBW Color 60pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10WXX-5050MC-005AD-060S-MY3-3X60	5	11.8	60	N/A	N/A	RGBW	80/90	16.6	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

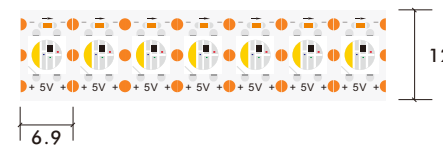

SK6812




5V DC 144 Pixel 3 Line 12mm 5050 144LED RGBW Color 144pixels Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12WXX-5050MC-005AD-144S-MY3-3X144	5	25	144	N/A	N/A	RGBW	80/90	6.9	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




# DMX 512 LED STRIP LIGHT

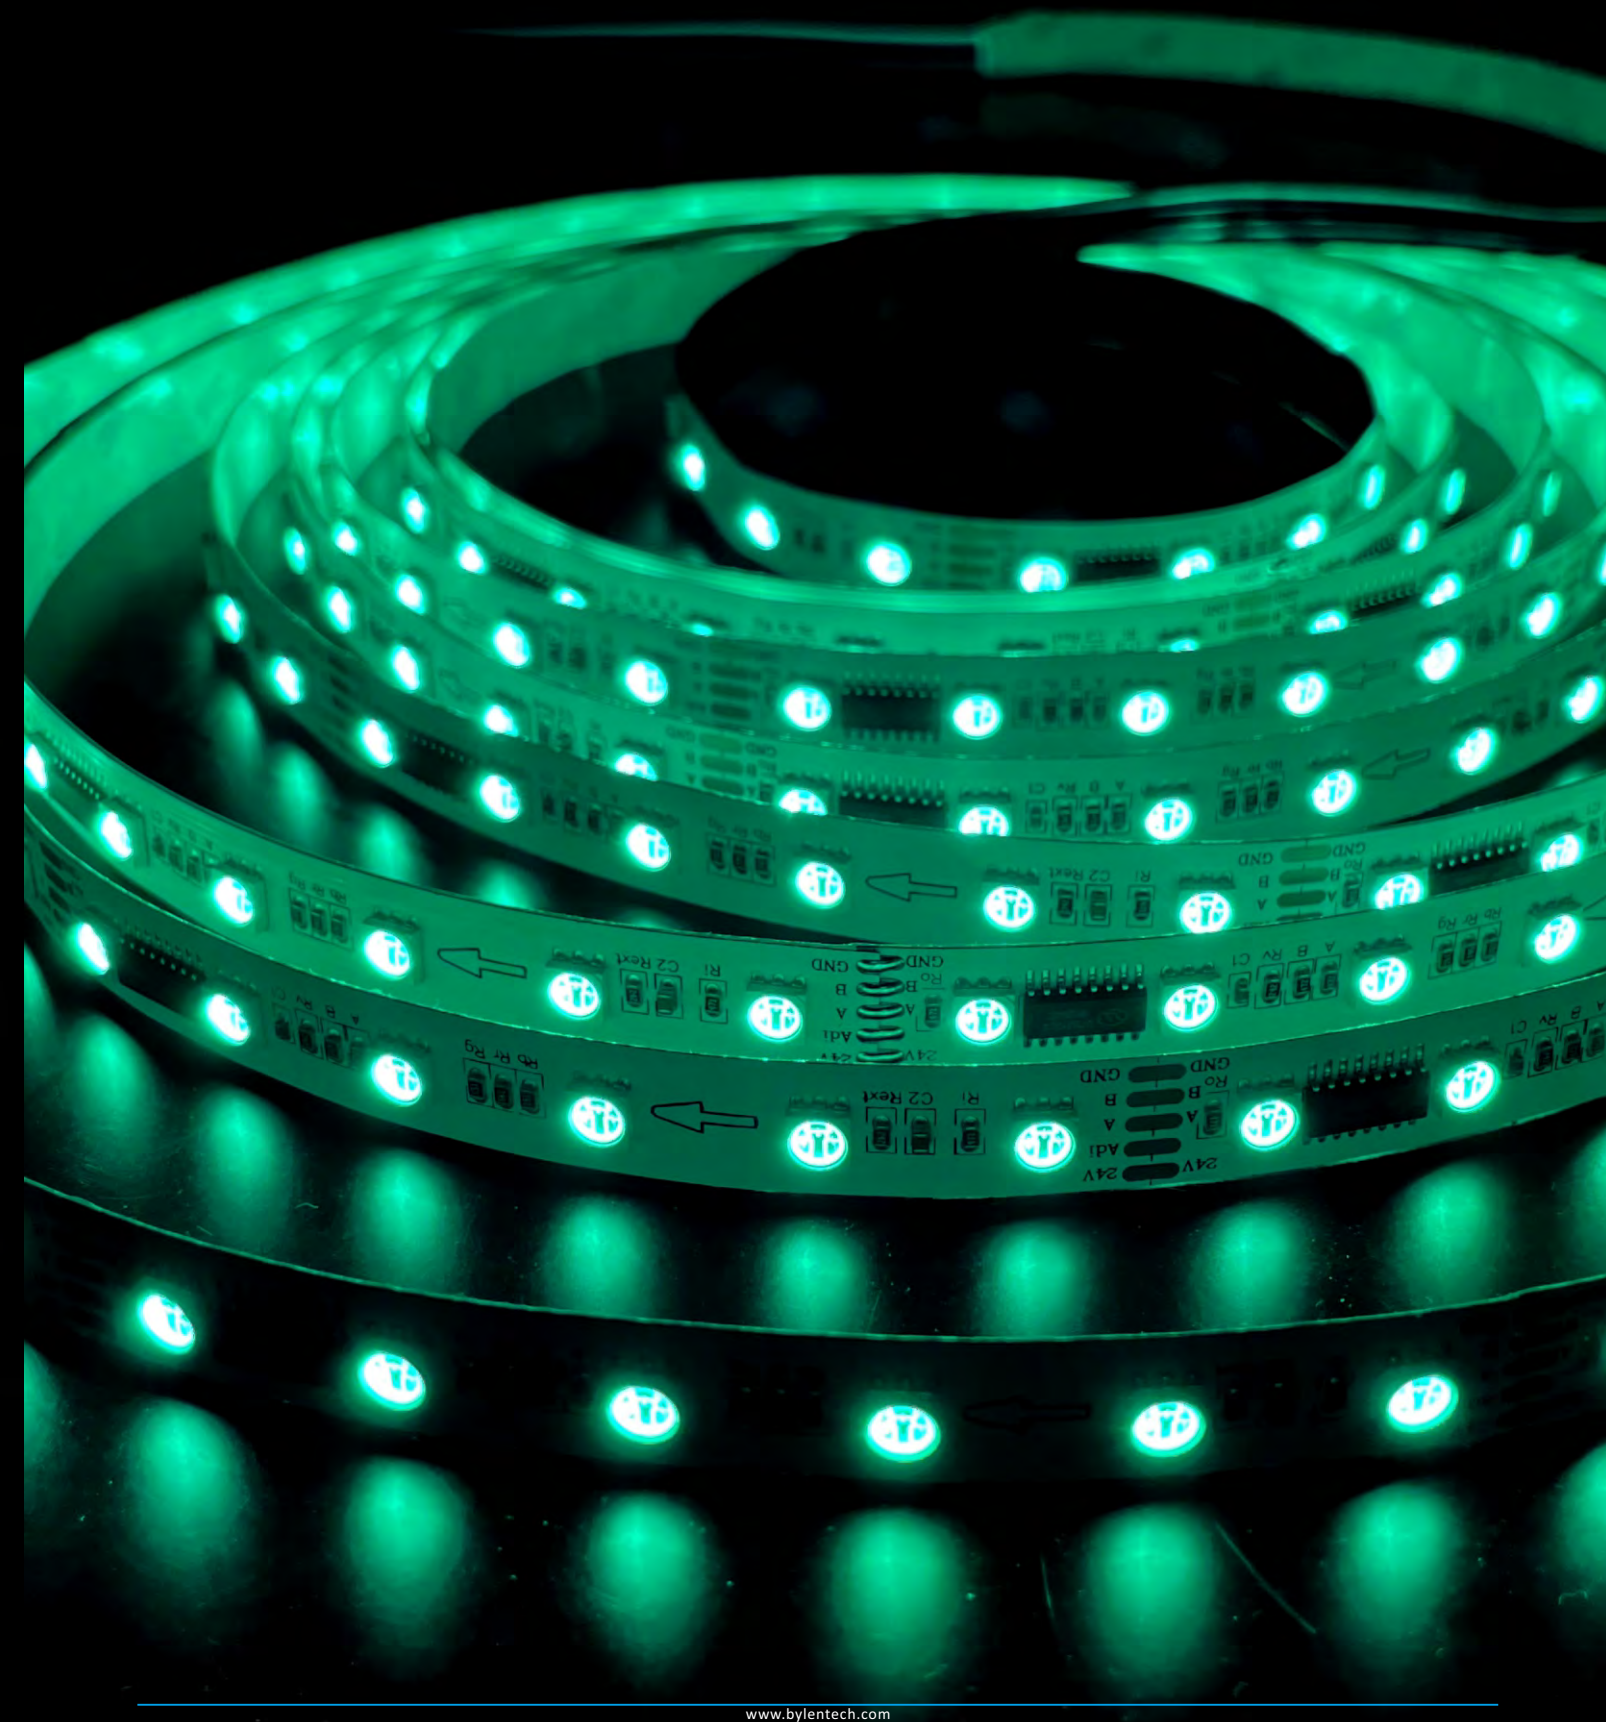

2835 120LED WHITE COLOR DMX STRIP




UCS512H5L

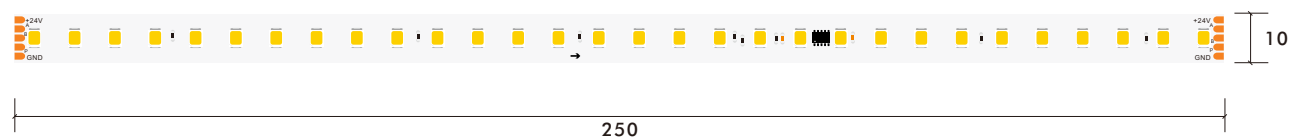

10mm 2835 120LED White Color 4pixels Dmx Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-283527-024DMX-120S-MY3-5X04	24	6.5	120	552	85	2700	80/90	250	120
S10WXX-283530-024DMX-120S-MY3-5X04	24	6.5	120	585	90	3000	80/90	250	120
S10WXX-283540-024DMX-120S-MY3-5X04	24	6.5	120	615	95	4000	80/90	250	120
S10WXX-283560-024DMX-120S-MY3-5X04	24	6.5	120	585	90	6000	80/90	250	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

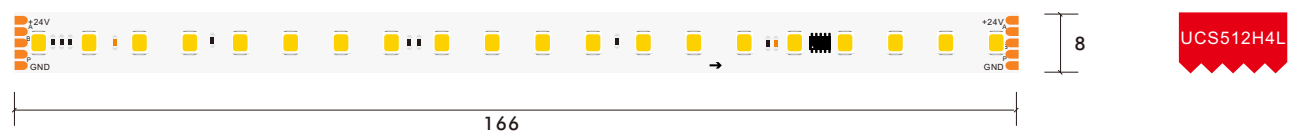


UCS512H4L



10mm 2835 120LED White Color 6pixels Dmx Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-283527-024DMX-120S-MY3-5X06	24	11	120	935	85	2700	80/90	166	120
S10WXX-283530-024DMX-120S-MY3-5X06	24	11	120	990	90	3000	80/90	166	120
S10WXX-283540-024DMX-120S-MY3-5X06	24	11	120	1045	95	4000	80/90	166	120
S10WXX-283560-024DMX-120S-MY3-5X06	24	11	120	990	90	6000	80/90	166	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

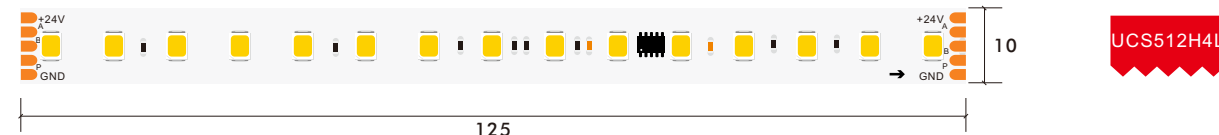

UCS512H4L



10mm 2835 120LED White Color Dmx 8 Pixels Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-283527-024DMX-120S-MY3-5X08	24	12	120	1020	85	2700	80/90	125	120
S10WXX-283530-024DMX-120S-MY3-5X08	24	12	120	1080	90	3000	80/90	125	120
S10WXX-283540-024DMX-120S-MY3-5X08	24	12	120	1140	95	4000	80/90	125	120
S10WXX-283560-024DMX-120S-MY3-5X08	24	12	120	1080	90	6000	80/90	125	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



UCS512H4L



10mm 2835 120LED White Color 10pixels Dmx Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-283527-024DMX-120S-MY3-5X10	24	19	120	1632	85	2700	80/90	100	120
S10WXX-283530-024DMX-120S-MY3-5X10	24	19	120	1728	90	3000	80/90	100	120
S10WXX-283540-024DMX-120S-MY3-5X10	24	19	120	1824	95	4000	80/90	100	120
S10WXX-283560-024DMX-120S-MY3-5X10	24	19	120	1728	90	6000	80/90	100	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



2835 WHITE COLOR 240LED DMX STRIP





15mm 2835 240LED White Color 8pixels Dmx Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S15WXX-283527-024DMX-240D-MY3-5X08	24	17	240	1445	85	2700	80/90	125	120
S15WXX-283530-024DMX-240D-MY3-5X08	24	17	240	1530	90	3000	80/90	125	120
S15WXX-283540-024DMX-240D-MY3-5X08	24	17	240	1615	95	4000	80/90	125	120
S15WXX-283560-024DMX-240D-MY3-5X08	24	17	240	1530	90	6000	80/90	125	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




3527 CCT DUAL COLOR 120LED DMX STRIP

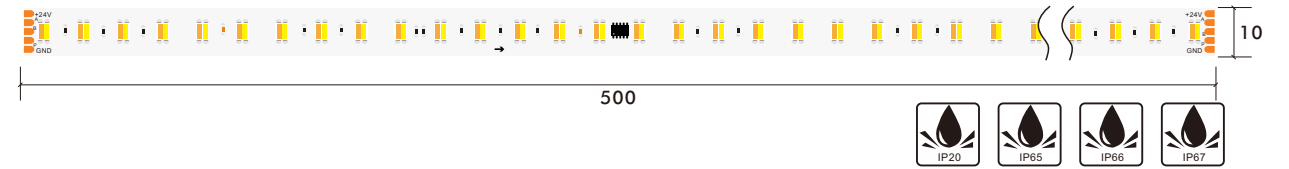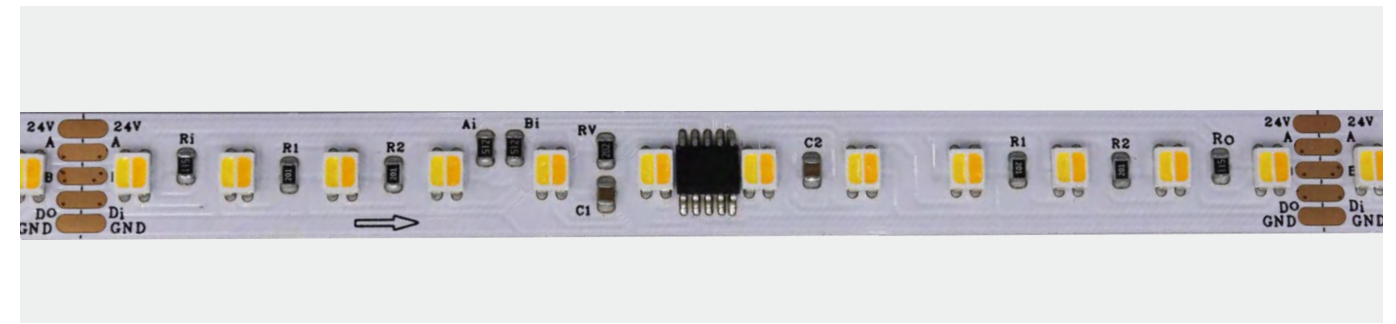

10mm 3527 120LED CCT Color 2pixels Dmx Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-3527TW-024DMX-120S-MY3-5X02	24	19	120	1520	80	CCT	80/90	500	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

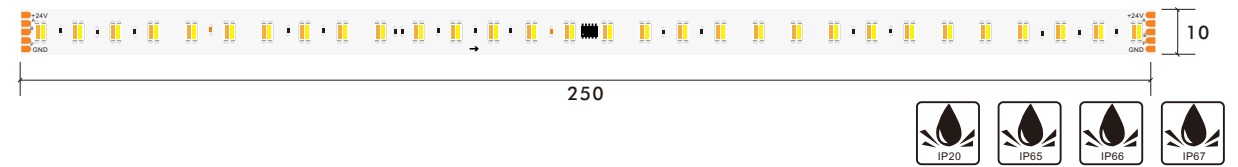

10mm 3527 120LED CCT Color 4pixels Dmx Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-3527TW-024DMX-120S-MY3-5X04	24	10.3	120	850	80	CCT	80/90	250	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68





10mm 3527 120LED CCT Color 10pixels Dmx Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-3527TW-024DMX-120S-MY3-5X10	24	19	120	1520	80	CCT	80/90	100	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

5050 RGB COLOR 10/12MM 60LED DMX STRIP

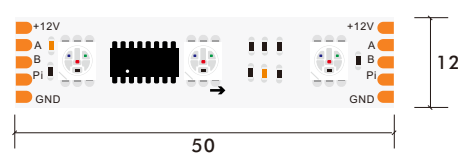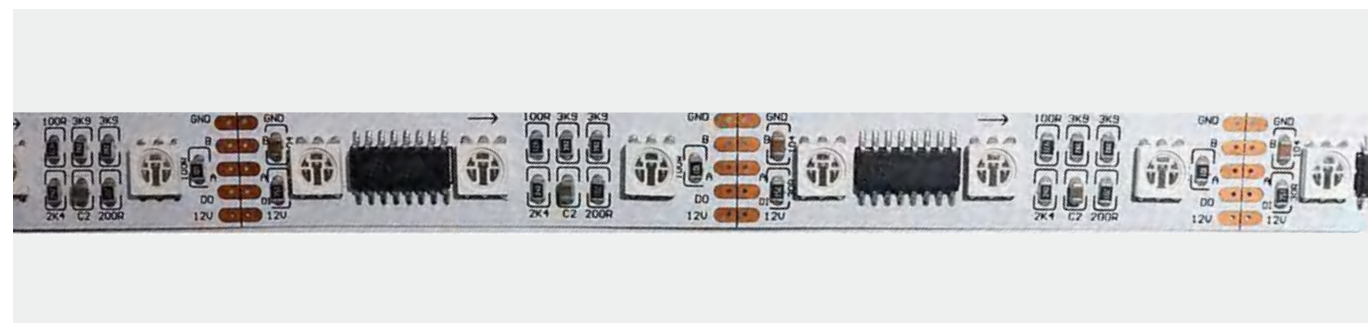


UCS512C4 UCS512H4L



**12mm 5050 60LED RGB Color 20pixels Dmx Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S12WXX-5050TC-012DMX-060S-MY3-5X20	12	14.4	60	N/A	N/A	RGB	N/A	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

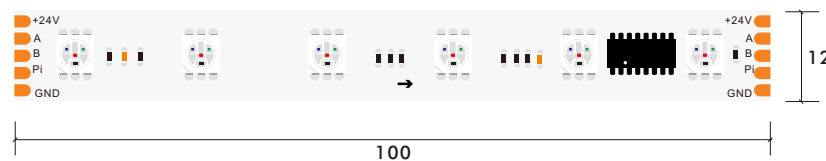

UCS512C4 UCS512H4L





**12mm 5050 60LED RGB Color 10pixels Dmx Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S12WXX-5050TC-024DMX-060S-MY3-5X10	24	14.4	60	N/A	N/A	RGB	N/A	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

2835 RGB COLOR 120LED DMX STRIP

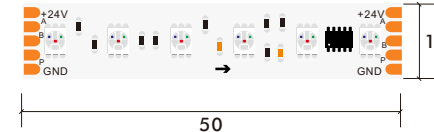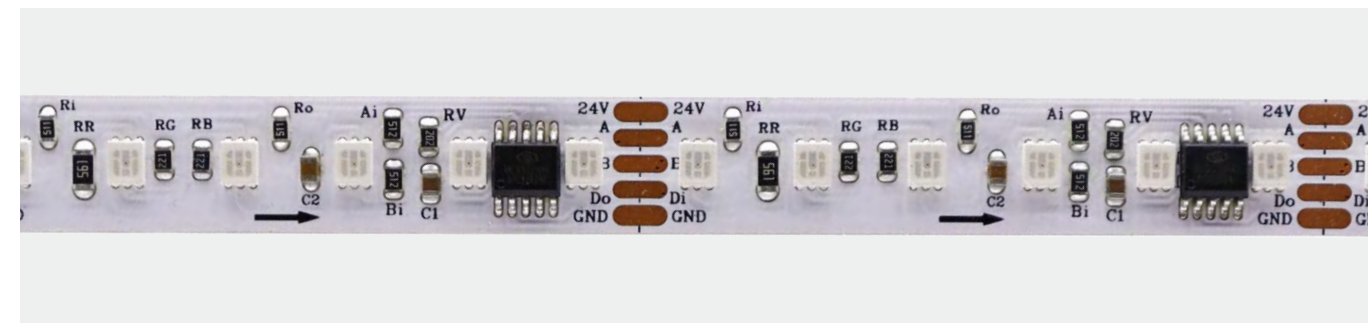


UCS512H4L



**10mm 2835 120LED RGB Color 20pixels Dmx Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-2835TC-024DMX-120S-MY3-5X20	24	14	120	N/A	N/A	RGB	N/A	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

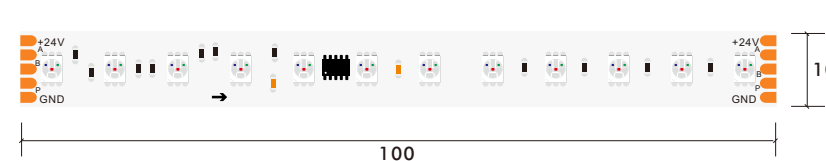


UCS512H5L





**10mm 2835 120LED RGB Color 10pixels Dmx Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10WXX-2835TC-024DMX-120S-MY3-5X10	24	21	120	N/A	N/A	RGB	N/A	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

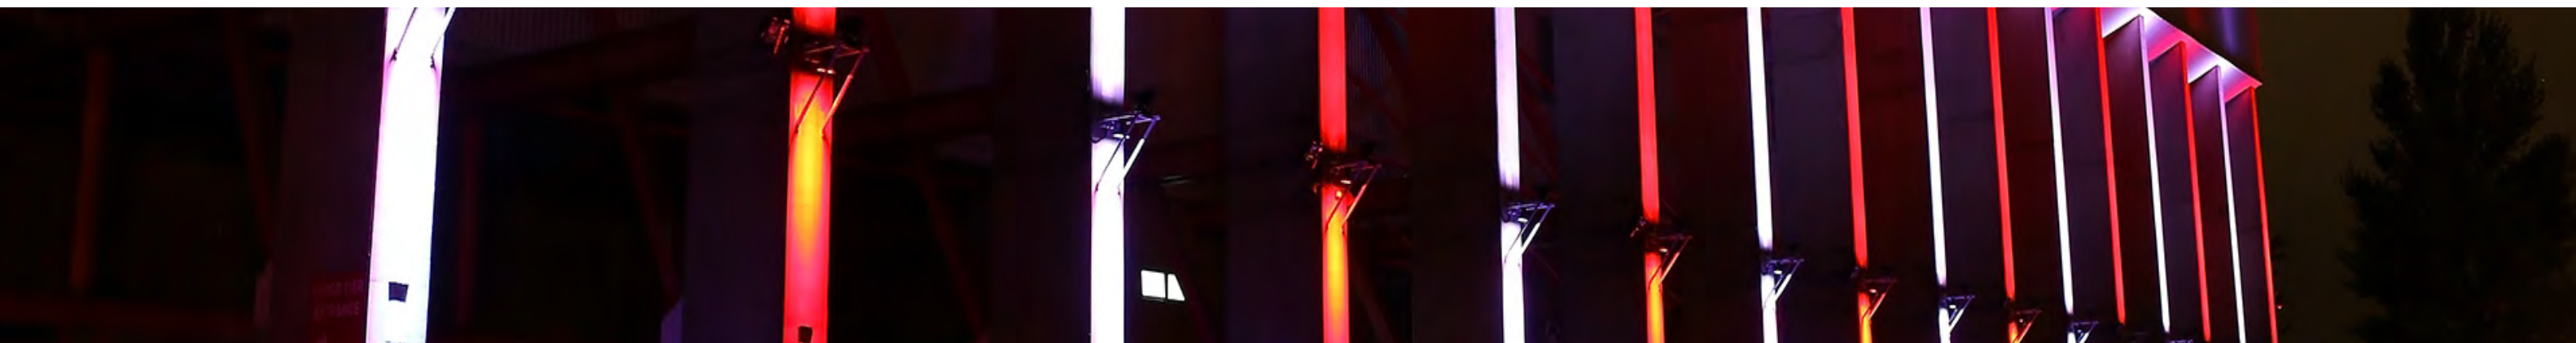

5050 RGBW COLOR 12MM 60LED DMX STRIP

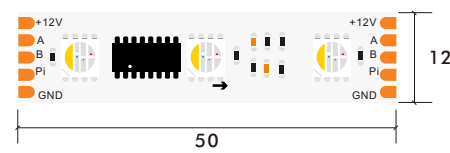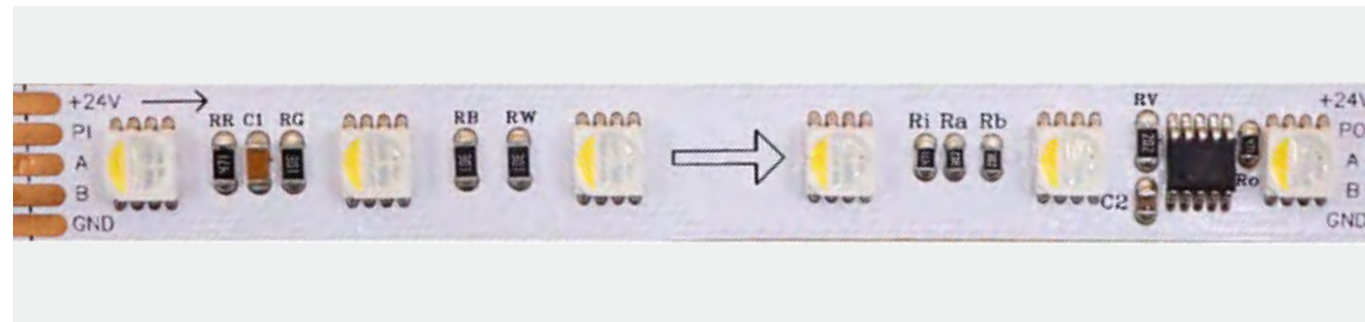


UCS512C4 UCS512H4L



**12V DC 20 Pixel 5 Line 12mm 5050 60LED RGBW Color 20pixels Dmx Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S12WXX-5050MC-012DMX-060S-MY3-5X20	12	18	60	N/A	N/A	RGBW	80/90	50	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

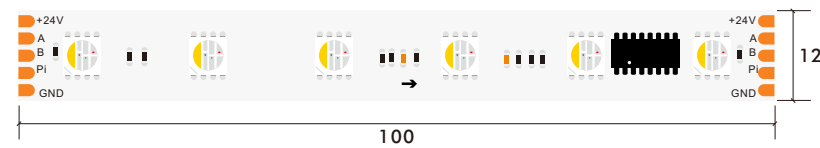

UCS512C4 UCS512H4L





**24V DC 10 Pixel 5 Line 12mm 5050 60LED RGBW Color 10pixels Dmx Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S12WXX-5050MC-024DMX-060S-MY3-5X10	24	18	60	N/A	N/A	RGBW	80/90	100	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

5050 RGBW COLOR 12MM 84LED DMX STRIP

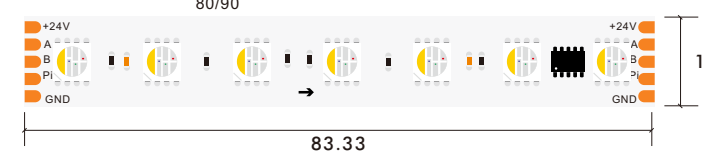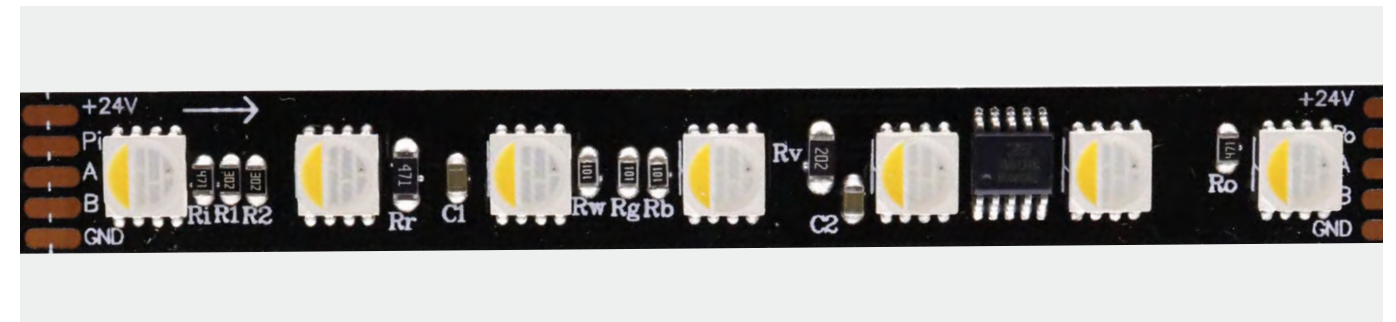


UCS512H4L



**24V DC 12 Pixel 5 Line 12mm 5050 84LED RGBW Color 12pixels Dmx Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S12WXX-5050MC-024DMX-084S-MY3-5X12	24	27.4	84	N/A	N/A	RGBW	80/90	83.3	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

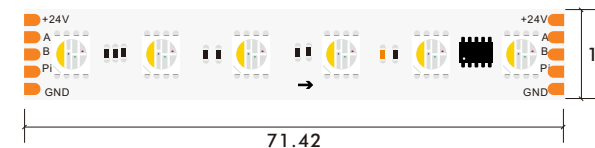


UCS512H4L





**24V DC 14 Pixel 5 Line 12mm 5050 84LED RGBW 14pixels Dmx Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S12WXX-5050MC-024DMX-084S-MY3-5X14	24	27.7	84	N/A	N/A	RGBW	80/90	71.42	120

\*The strip light will come with 5 meters /reel  
\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

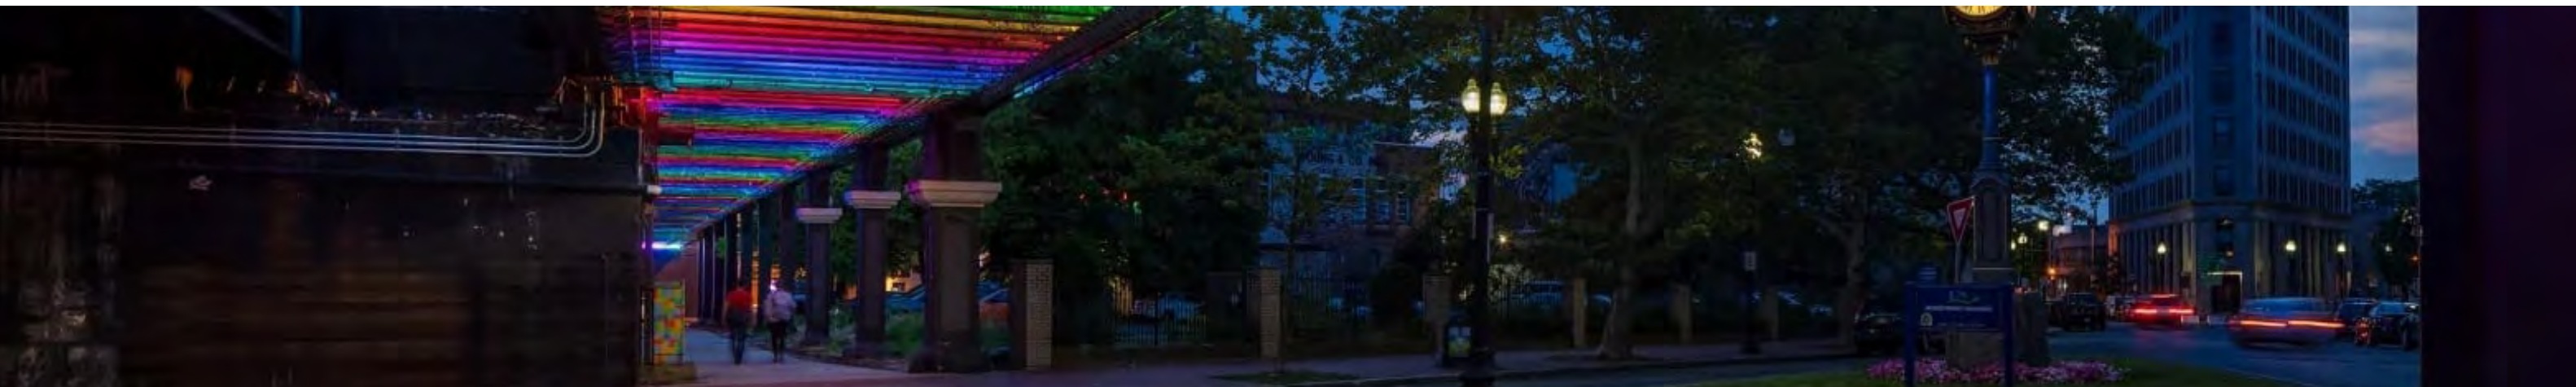


5050 RGBW COLOR 12MM 96LED DMX STRIP

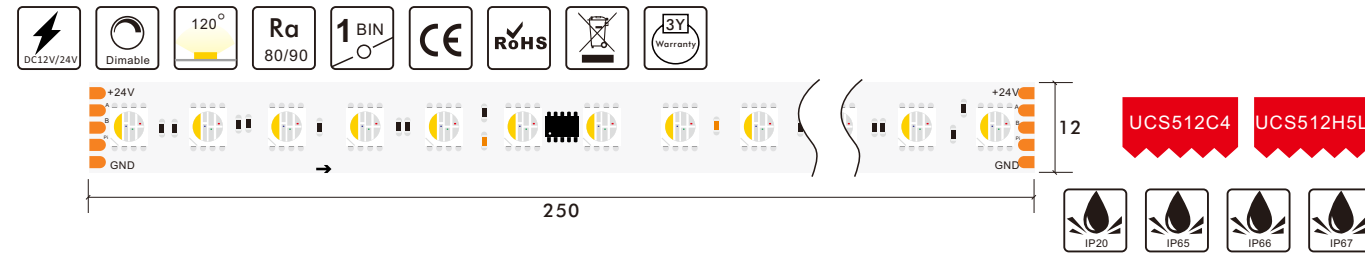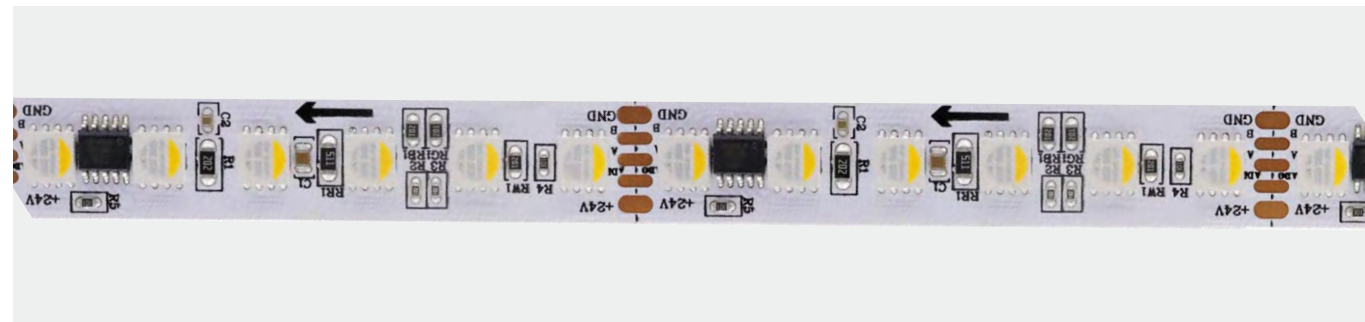

24V DC 4 Pixel 5 Line 12mm 5050 96LED RGBW Color 4pixels Dmx Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S12WXX-5050MC-024DMX-096S-MY3-5X04	24	10	96	N/A	N/A	RGBW	N/A	250	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

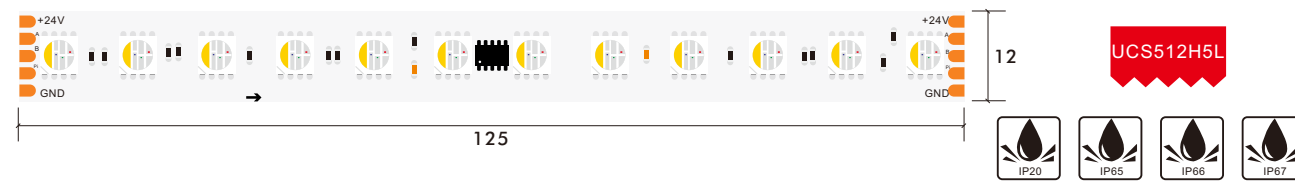

24V DC 8 Pixel 5 Line 12mm 5050 96LED RGBW Color 8pixels Dmx Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S12WXX-5050MC-024DMX-096S-MY3-5X08	24	21	N/A	N/A	80	RGBW	N/A	125	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68





24V DC 16 Pixel 5 Line 12mm 5050 96LED RGBW Color 16pixels Dmx Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S12WXX-5050MC-024DMX-096S-MY3-5X12	24	30	N/A	N/A	N/A	RGBW	N/A	62.5	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


5050 RGBCCT COLOR 12MM 60LED DMX STRIP

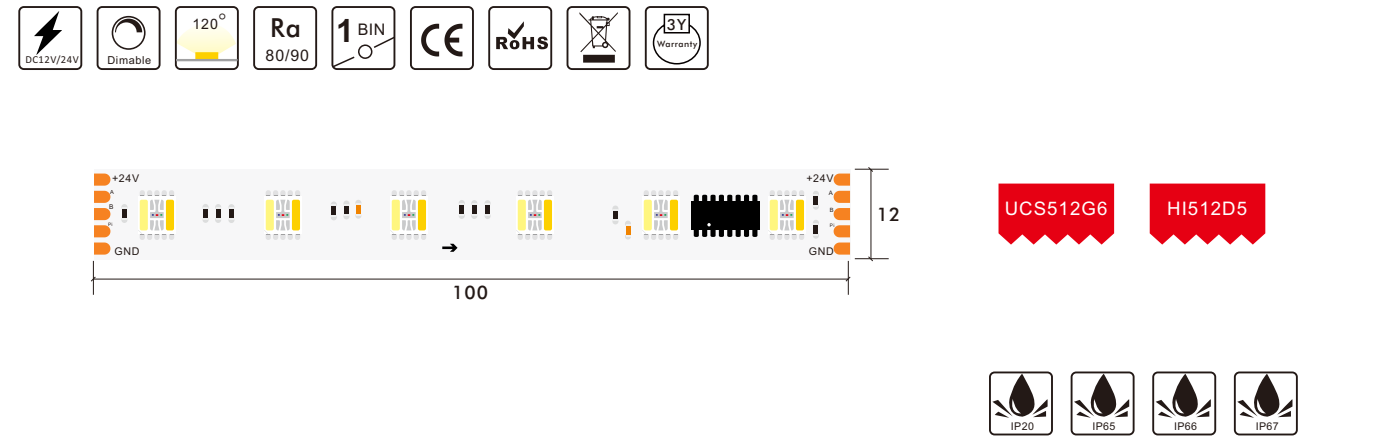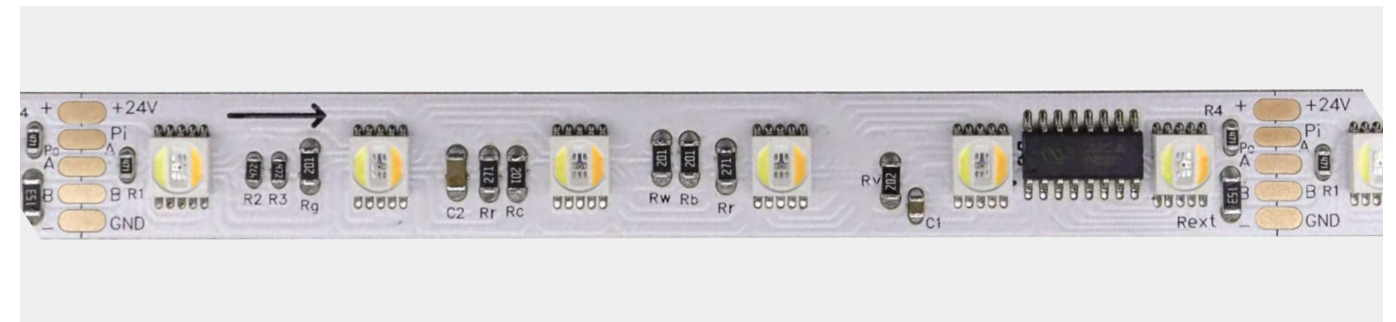

24V DC 10 Pixel 5 Line 12mm 5050 60LED RGBWW Color 10pixels Dmx Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S12WXX-5050FC-024DMX-060S-MY3-5X10	24	23	60	N/A	N/A	RGBWW	80/90	100	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

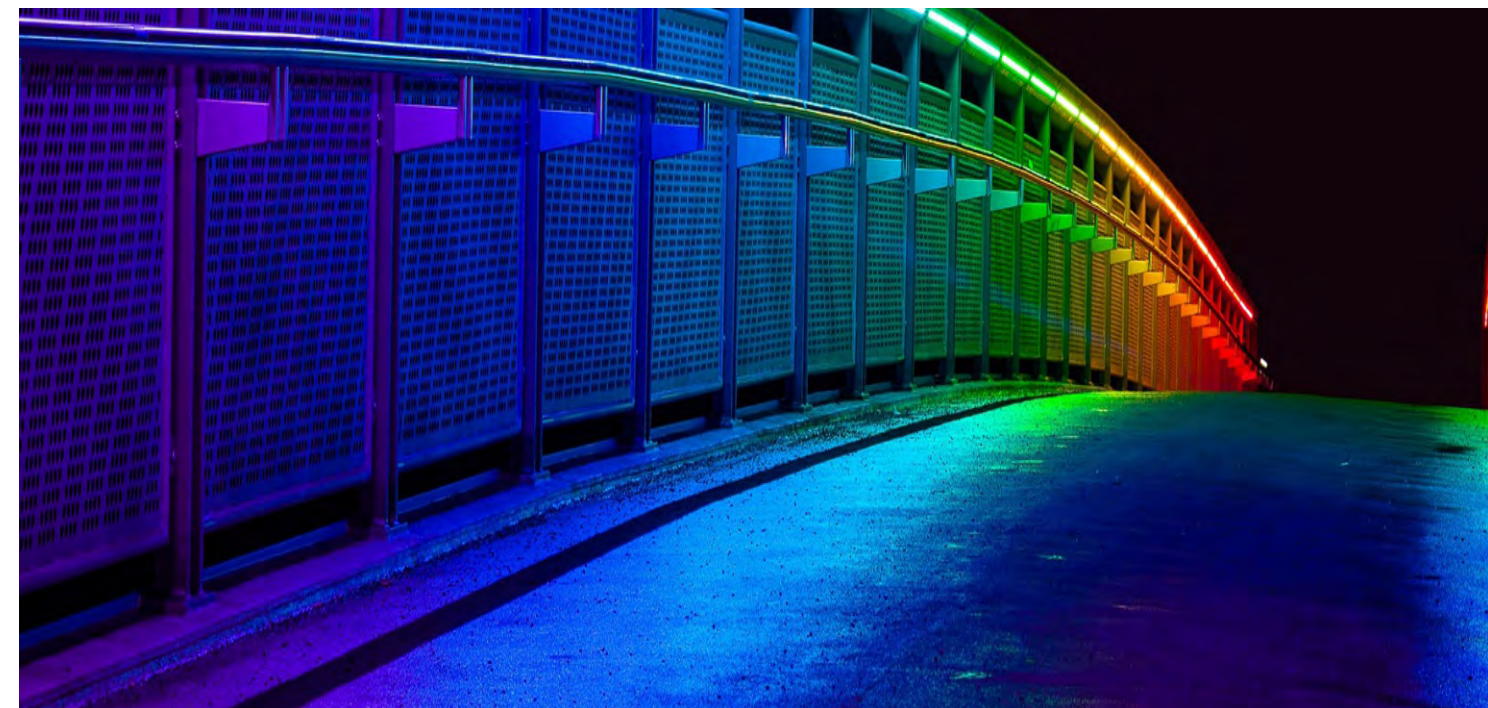




# NEON FLEX

SILICONE EXTRUSION



# Side Bend Neon flex

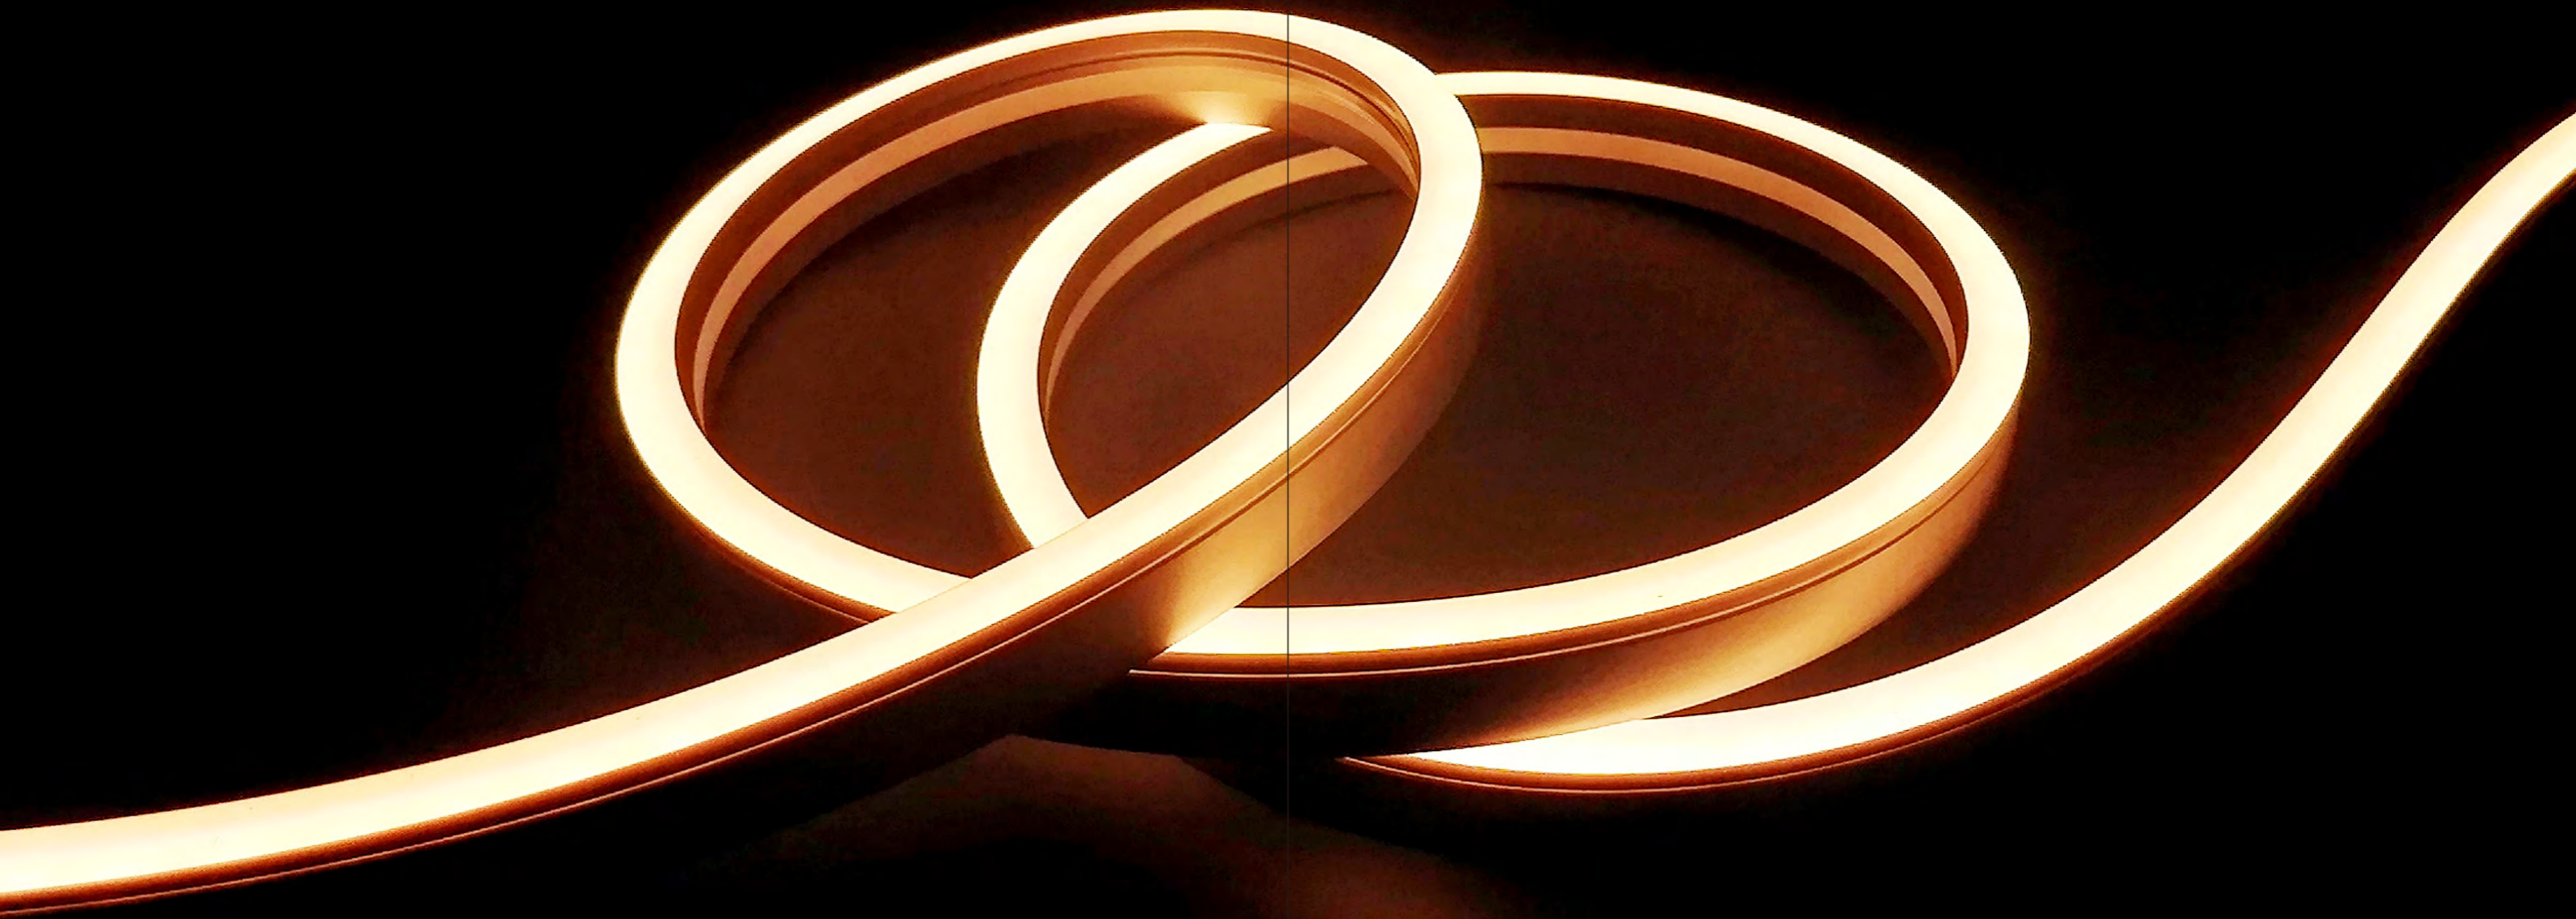

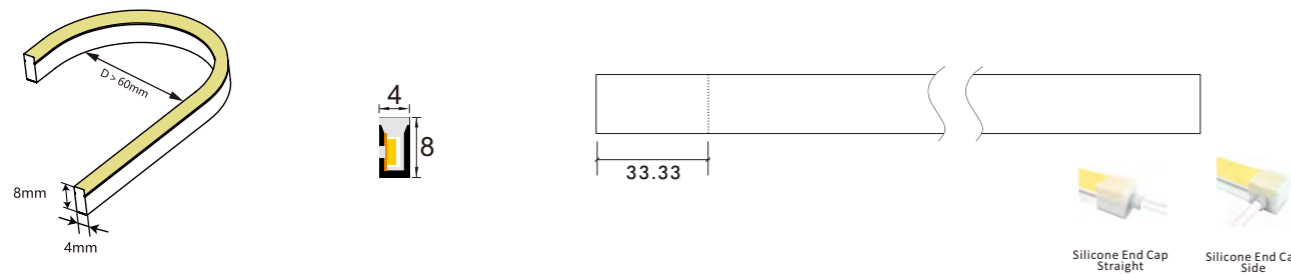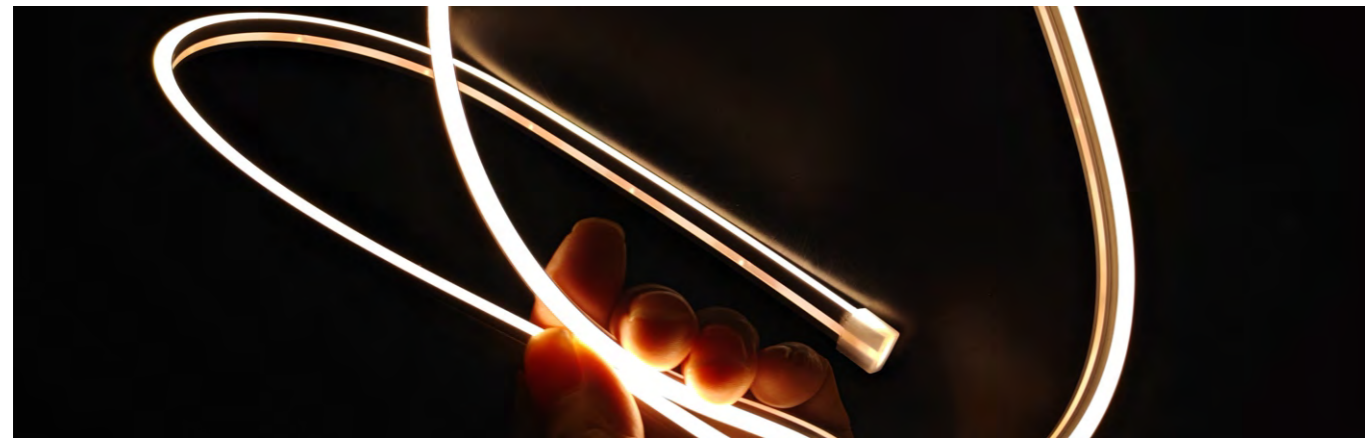

**24V DC Side Bend 4\*8mm Neon flex**



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N05W67-221627-024CV-210S-MY3-S0408	24	6	210	240	40	2700	90	33.33	120
N05W67-221630-024CV-210S-MY3-S0408	24	6	210	270	45	3000	90	33.33	120
N05W67-221640-024CV-210S-MY3-S0408	24	6	210	330	55	4000	90	33.33	120
N05W67-221660-024CV-210S-MY3-S0408	24	6	210	270	45	6000	90	33.33	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**



Item#	Description
2PCN-S0408-001	Silicone material, for 4*8mm end cap with hole for wire, come out in strange
2PCN-S0408-002	Silicone material, for 4*8mm end cap with hole for wire, come out from side
2PCN-S0408-003	Silicone material, for 4*8mm end cap without hole
2PCN-S0408-004	Aluminum clips, 10mm length
2PCN-S0408-005	Aluminum channel for 4*8mm one meter length

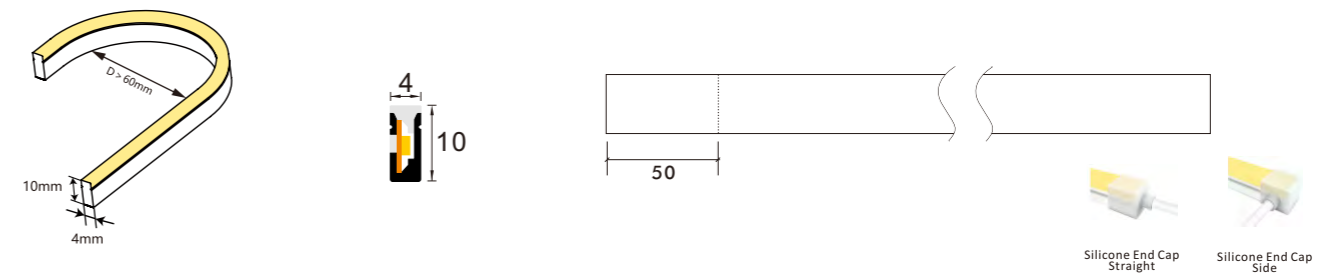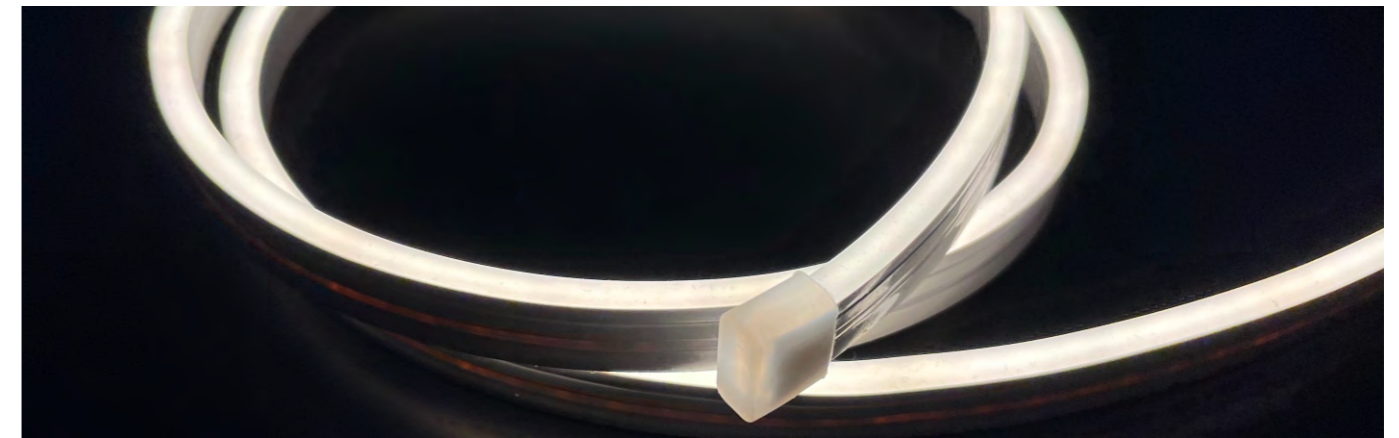

**24V DC Side Bend 4\*10mm Neon flex**



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N06W67-2835XX-024CV-160S-MY3-S0410	24	6	160	330	55	WHITE	80/90	50	120
N06W67-2835XX-024CV-160S-MY3-S0410MC	24	6	160	246	41	WHITE	80/90	12.5	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**



Item#	Description
2PCN-S0410-001	Silicone material, for 4*10mm end cap with hole for wire, come out in strange
2PCN-S0410-002	Silicone material, for 4*10mm end cap with hole for wire, come out from side
2PCN-S0410-003	Silicone material, for 4*10mm end cap without hole
2PCN-S0410-004	Aluminum clips, 10mm length
2PCN-S0410-005	Aluminum channel for 4*10mm one meter length
2PCN-S0410-006	Flexible Aluminum channel for 4*10mm one meter length

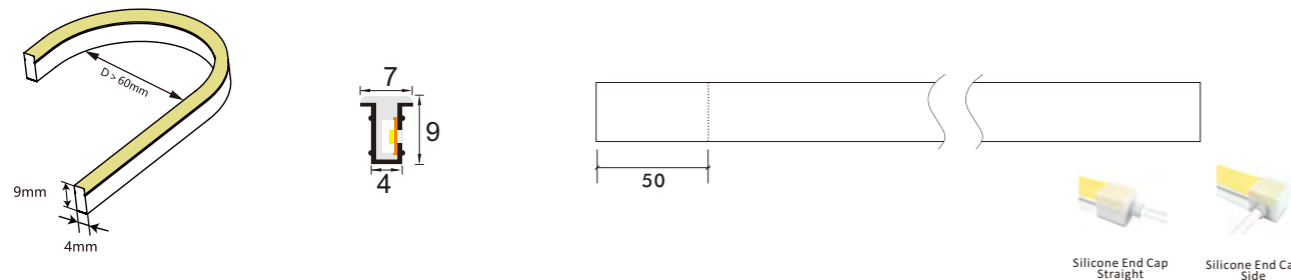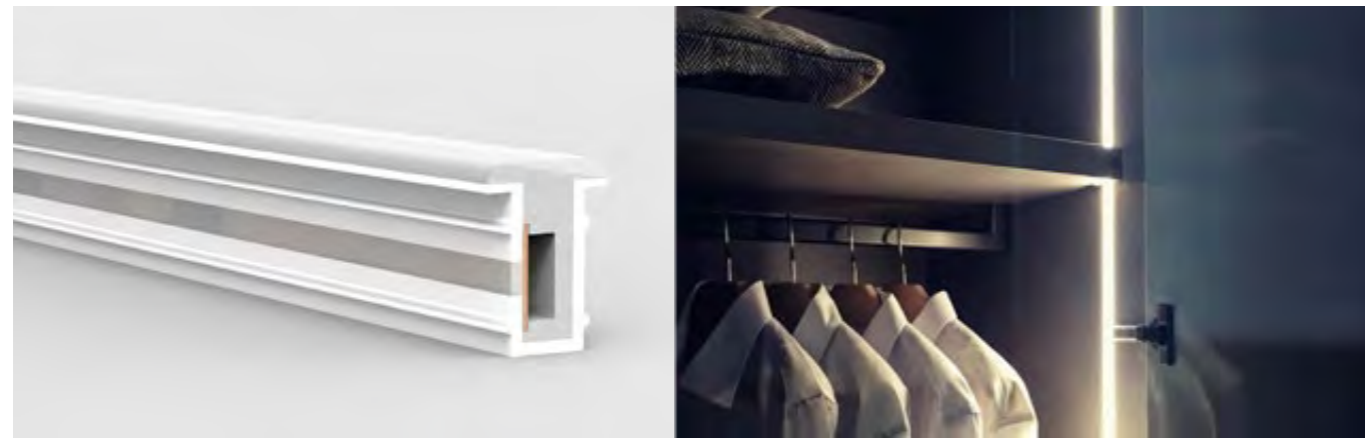

**24V DC Side Bend 4\*9mm Neon flex**


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N06W67-2835XX-024CV-160S-MY3-S0409T	24	6	160	330	55	WHITE	80/90	50	120
N06W67-2835XX-024CV-160S-MY3-S0409TMC	24	6	160	246	41	WHITE	80/90	12.5	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**



Item#	Description
2PCN-S0409T-001	Silicone material, for 4*9mm end cap with hole for wire, come out in strange
2PCN-S0409T-003	Silicone material, for 4*9mm end cap without hole
2PCN-S0409T-004	Aluminum clips, 10mm length

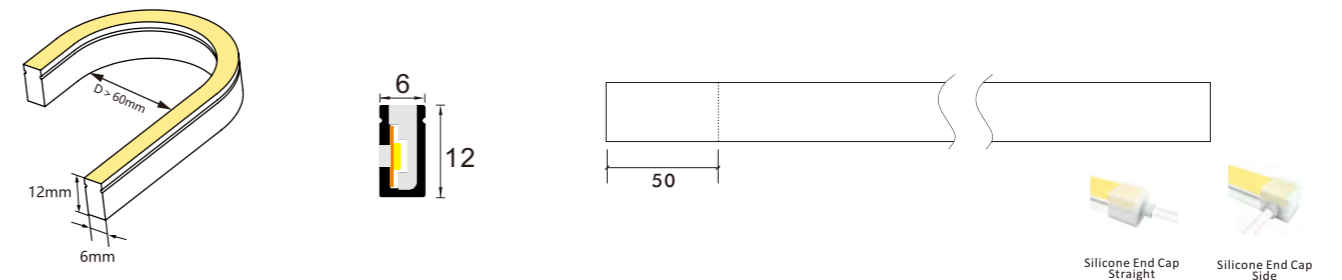

**24V DC Side Bend 6\*12mm Neon flex**



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N08W67-2835XX-024CV-140S-MY3-S0612	24	12	140	660	55	WHITE	80/90	50	120
N08W67-2835XX-024CV-120S-MY3-S0612MC	24	12	120	492	41	WHITE	80/90	16.6	120
N08W67-2216TW-024CV-240S-MY3-S0612	24	12	240	492	41	CCT	90	50	120
N08W67-3838TC-024CV-120S-MY3-S0612	24	12	120	N / A	N / A	RGB	N / A	50	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**



Item#	Description
2PCN-S0612-001	Silicone material, for 6*12mm end cap with hole for wire, come out in strange
2PCN-S0612-002	Silicone material, for 6*12mm end cap with hole for wire, come out from side
2PCN-S0612-003	Silicone material, for 6*12mm end cap without hole
2PCN-S0612-004	Aluminum clips, 10mm length
2PCN-S0612-005	Aluminum channel for 6*12mm one meter length
2PCN-S0612-006	Flexible Aluminum channel for 6*12mm one meter length
2PCN-S0612-007	Silicone material, for 6*12mm end cap with hole for wire, come out from bottom

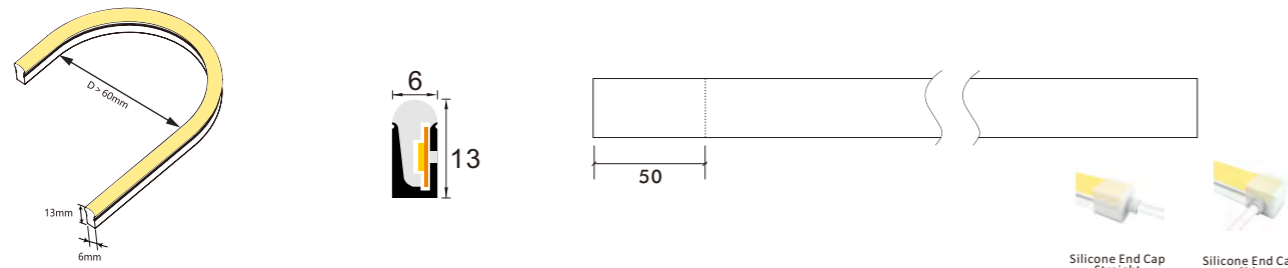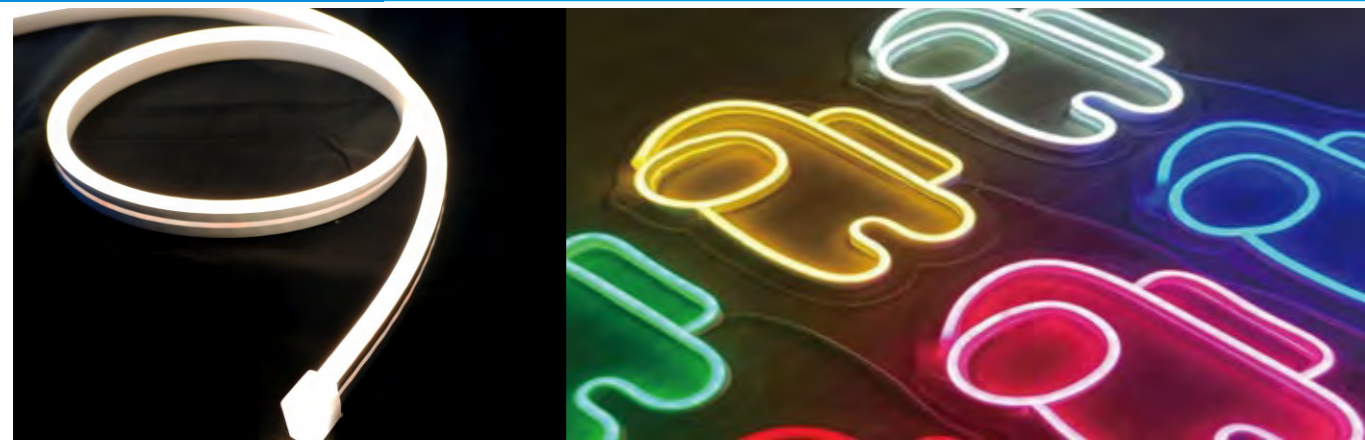

**24V DC Side Bend 6\*13mm Neon flex**



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N08W67-2835XX-024CV-140S-MY3-S0613	24	12	140	660	55	WHITE	80/90	50	120
N08W67-2835XX-024CV-120S-MY3-S0613MC	24	12	120	492	41	WHITE	80/90	16.6	120
N08W67-2216TW-024CV-240S-MY3-S0613	24	12	240	492	41	CCT	90	50	120
N08W67-2835TC-024CV-120S-MY3-S0613	24	12	120	N/A	N/A	RGB	N/A	50	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**



Item#	Description
2PCN-S0613-001	Silicone material, for 06*13mm end cap with hole for wire, come out in strange
2PCN-S0613-003	Silicone material, for 06*13mm end cap without hole
2PCN-S0613-004	Aluminum clips, 2mm length
2PCN-S0613-005	Aluminum channel for 6*13mm one meter length

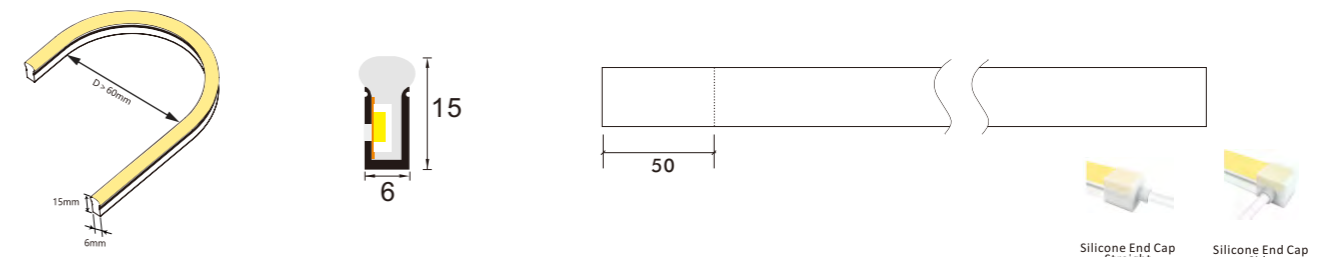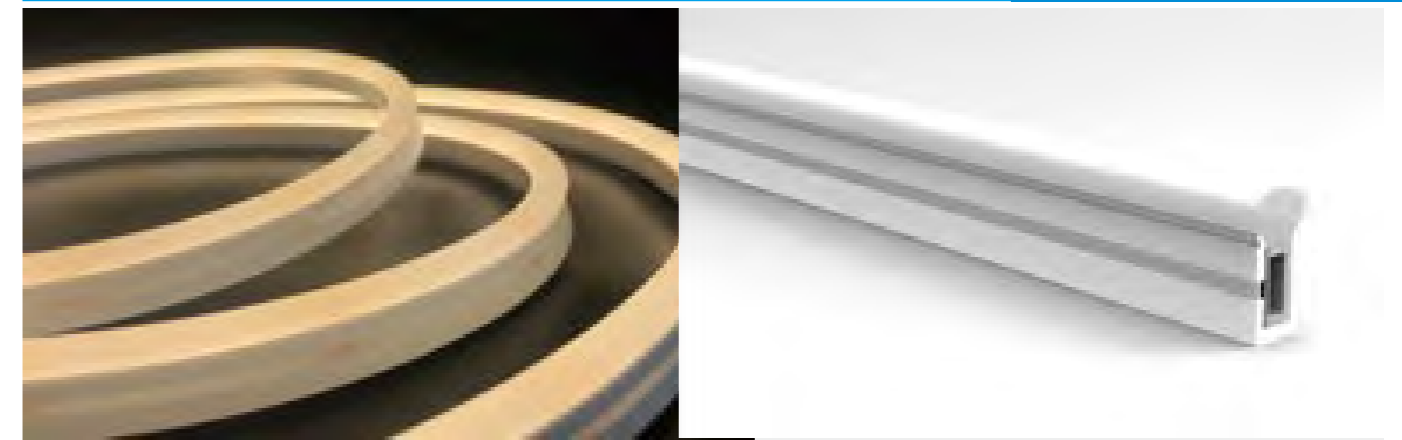

**24V DC Side Bend 6\*15mm Neon flex**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N08W67-2835XX-024CV-140S-MY3-S0615	24	12	140	660	55	WHITE	80/90	50	120
N08W67-2835XX-024CV-120S-MY3-S0615MC	24	12	120	492	41	WHITE	80/90	50	120
N08W67-2835TW-024CV-240S-MY3-S0615	24	12	240	492	41	CCT	90	50	120
N08W67-2835TC-024CV-120S-MY3-S0615	24	12	120	N/A	N/A	RGB	N/A	50	120


\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**



Item#	Description
2PCN-S0613-001	Silicone material, for 06*13mm end cap with hole for wire, come out in strange
2PCN-S0613-003	Silicone material, for 06*13mm end cap without hole
2PCN-S0613-004	Aluminum clips, 2mm length
2PCN-S0613-005	Aluminum channel for 6*13mm one meter length

S0714

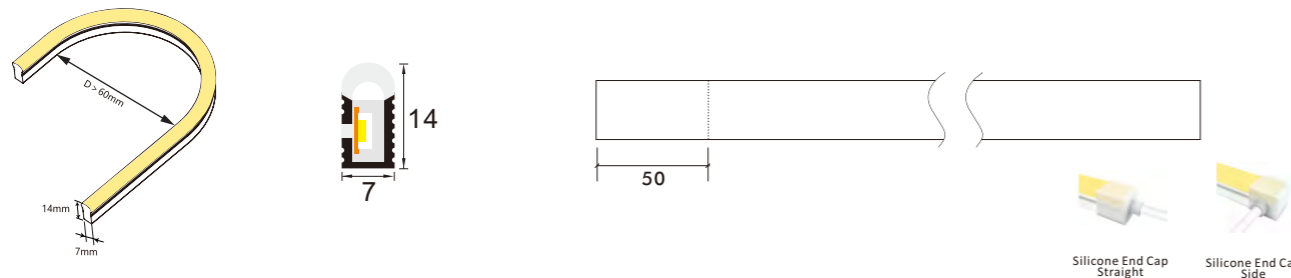

**24V DC Side Bend 7\*14mm Neon flex**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N06W67-2835XX-024CV-160S-MY3-S0714	24	6	160	330	55	WHITE	80/90	50	120
N06W67-2835XX-024CV-160S-MY3-S0714MC	24	6	160	246	41	WHITE	80/90	12.5	120


\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

Optional Accessories



Item#	Description
2PCN-S0714-001	Silicone material, for 7*14mm end cap with hole for wire, come out in strange
2PCN-S0714-003	Silicone material, for 7*14mm end cap without hole
2PCN-S0714-004	Aluminum clips, 2mm length
2PCN-S0714-005	Aluminum channel for 7*14mm one meter length
2PCN-S0714-006	Flexible Aluminum channel for 7*14mm one meter length

S0816

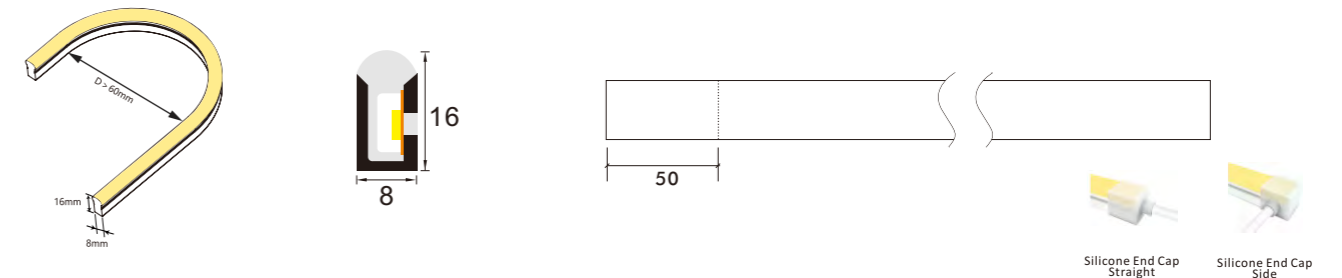

**24V DC Side Bend 8\*16mm Neon flex**



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-S0816	24	12	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-S0816MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-S0816	24	16	240	574	41	CCT	90	50	120
N10W67-3838TC-024CV-168S-MY3-S0816	24	12	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-4040FC-024CV-126S-MY3-S0816	24	12	126	N/A	N/A	RGBW	N/A	55.5	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

Optional Accessories



Item#	Description
2PCN-S0816-001	Silicone material, for 8*16mm end cap with hole for wire, come out in strange
2PCN-S0816-003	Silicone material, for 8*16mm end cap without hole
2PCN-S0816-004	Aluminum clips, 2mm length
2PCN-S0816-005	Aluminum channel for 8*16mm one meter length
2PCN-S0816-006	Flexible Aluminum channel for 8*16mm one meter length

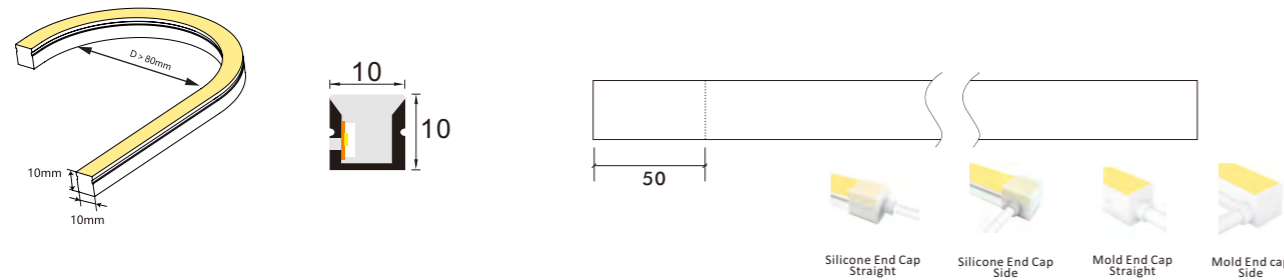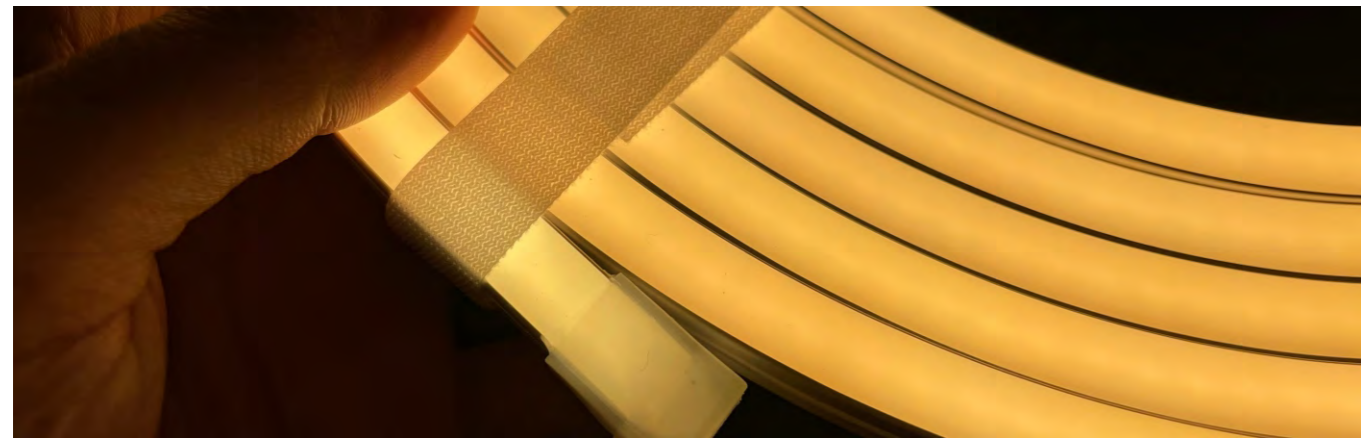


24V DC Side Bend 10*10mm Neon flex										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
N06W67-283527-024CV-160S-MY3-S1010	24	6	160	330	55	WHITE	80/90	50	120	
N06W67-283527-024CV-160S-MY3-S1010MC	24	6	160	246	41	WHITE	80/90	12.5	120	

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

Optional Accessories



Item#	Description
2PCN-1010-001	Silicone material, for 10*10mm end cap with hole for wire, come out in strange
2PCN-1010-002	Silicone material, for 10*10mm end cap with hole for wire, come out from side
2PCN-1010-003	Silicone material, for 10*10mm end cap without hole
2PCN-1010-004	Aluminum clips, 2mm lenght
2PCN-1010-005	Aluminum channel for 10*10mm one meter length
2PCN-1010-006	Flexible Aluminum channel for 10*10mm one meter length

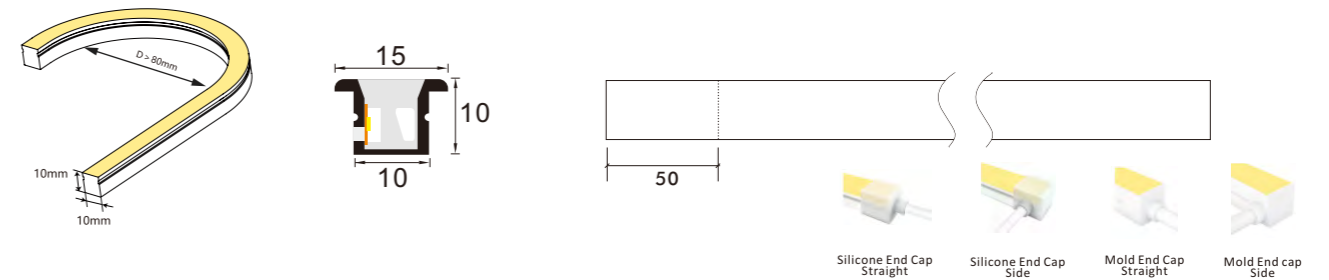


24V DC Side Bend 10*10mm Neon flex										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
N06W67-283527-024CV-160S-MY3-S1010T	24	6	160	330	55	WHITE	80/90	50	120	
N06W67-283527-024CV-160S-MY3-S1010TMC	24	6	160	246	41	WHITE	80/90	12.5	120	

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

Optional Accessories



Item#	Description
2PCN-S1010T-001	Silicone material, for 10*10mm end cap with hole for wire, come out in strange
2PCN-S1010T-002	Silicone material, for 10*10mm end cap with hole for wire, come out from side
2PCN-S1010T-003	Silicone material, for 10*10mm end cap without hole
2PCN-S1010T-004	Aluminum clips, 10mm lenght
2PCN-S1010T-005	Aluminum channel for 10*10mm one meter length

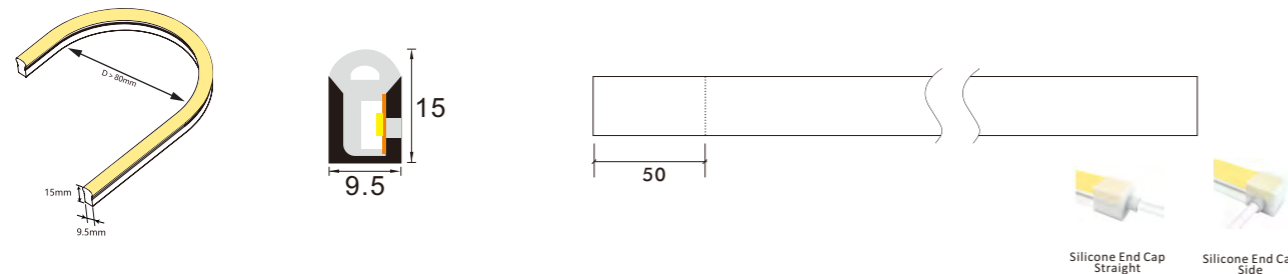


**24V DC Side Bend 10\*15mm Neon flex**



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N08W67-2835XX-024CV-140S-MY3-S1015	24	12	140	660	55	WHITE	80/90	50	120
N08W67-2835XX-024CV-120S-MY3-S1015MC	24	12	120	540	45	WHITE	80/90	16.6	120
N08W67-2835TW-024CV-240S-MY3-S1015	24	12	240	492	41	CCT	90	50	120
N08W67-2835TC-024CV-140S-MY3-S1015	24	12	140	N/A	N/A	RGB	N/A	50	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**



Item#	Description
2PCN-S1015-001	Silicone material, for 10*15mm end cap with hole for wire, come out in strange
2PCN-S1015-003	Silicone material, for 10*15mm end cap without hole

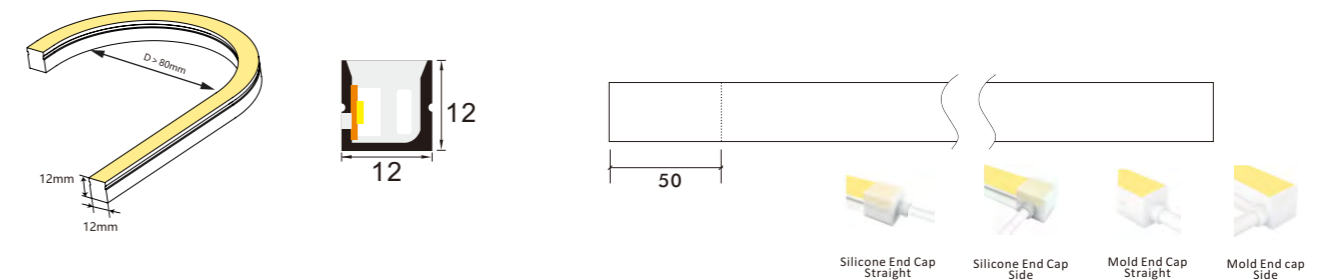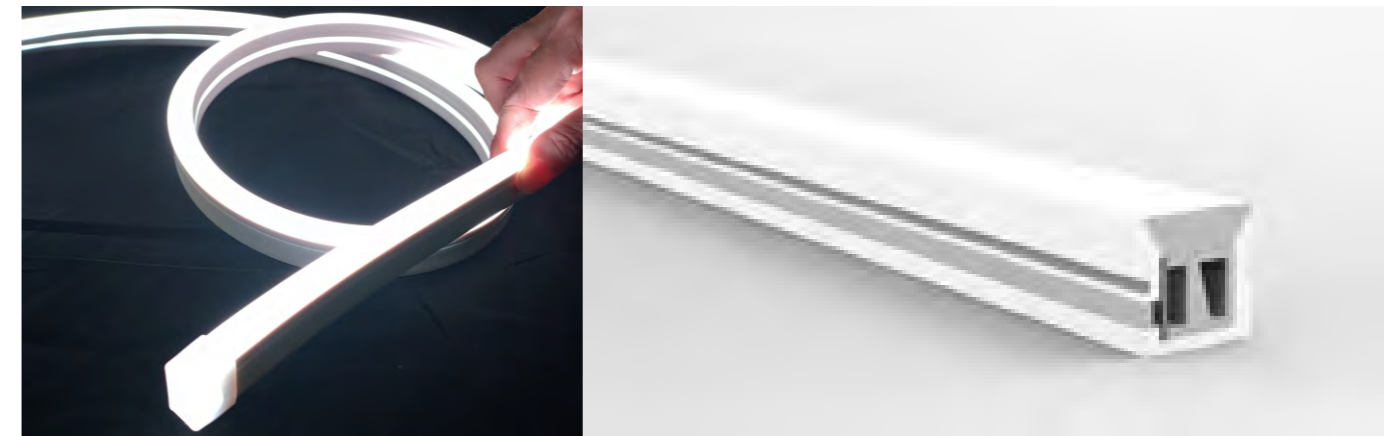


**24V DC Side Bend 12\*12mm Neon flex**



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N08W67-2835XX-024CV-140S-MY3-S1212	24	12	140	660	55	WHITE	80/90	50	120
N08W67-2835XX-024CV-120S-MY3-S1212MC	24	12	120	540	45	WHITE	80/90	16.6	120
N08W67-2835TW-024CV-240S-MY3-S1212	24	12	240	492	41	CCT	90	50	120
N08W67-2835TC-024CV-140S-MY3-S1212	24	12	140	N/A	N/A	RGB	N/A	50	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**

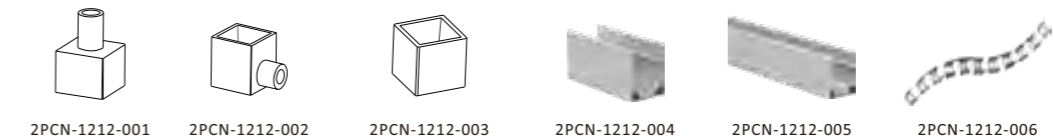

Item#	Description
2PCN-1212-001	Silicone material, for 12*12mm end cap with hole for wire, come out in strange
2PCN-1212-002	Silicone material, for 12*12mm end cap with hole for wire, come out from side
2PCN-1212-003	Silicone material, for 12*12mm end cap without hole
2PCN-1212-004	Aluminum clips, 2mm length
2PCN-1212-005	Aluminum channel for 12*12mm one meter length
2PCN-1212-006	Flexible Aluminum channel for 12*12mm one meter length

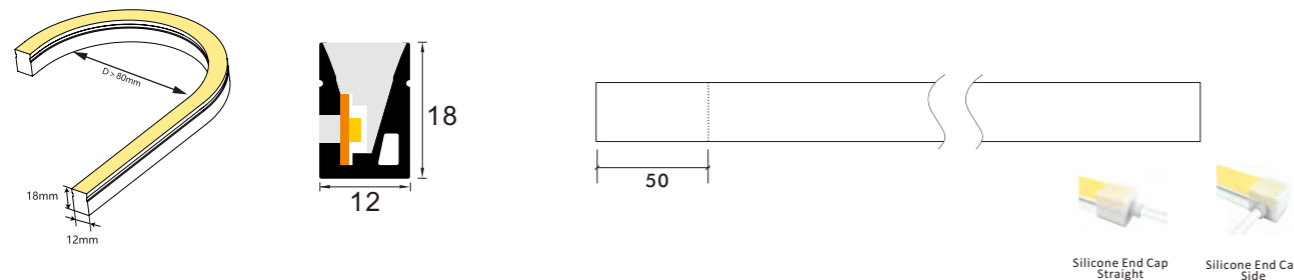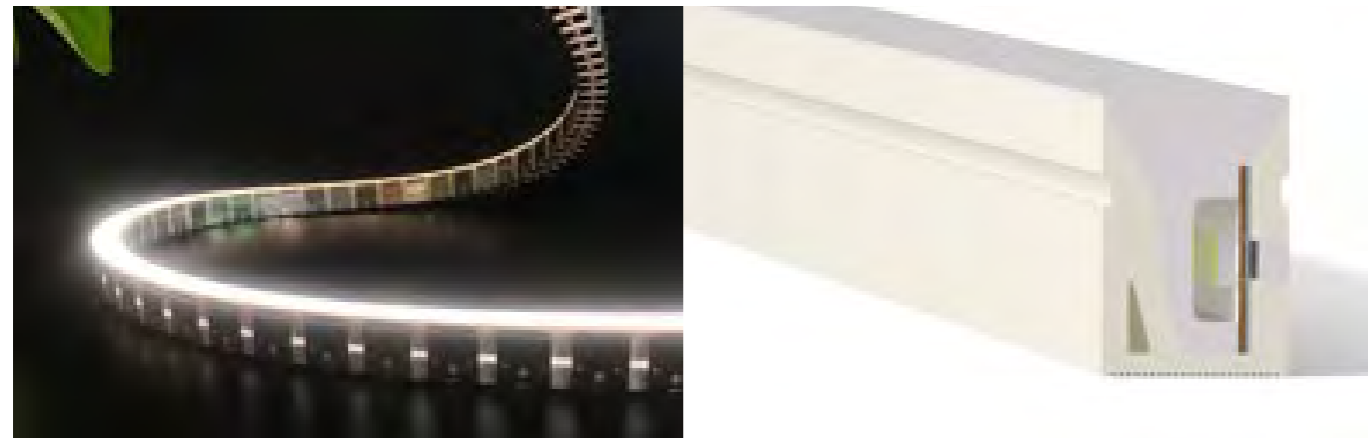


**24V DC Side Bend 12\*18mm Neon flex**



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-S1218	24	12	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-S1218MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-S1218	24	16	240	574	41	CCT	90	50	120
N10W67-3838TC-024CV-168S-MY3-S1218	24	12	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-4040FC-024CV-126S-MY3-S1218	24	12	126	N/A	N/A	RGBW	N/A	55.5	120

\*The neon flex will come with 5 meters /reel  
 \*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**

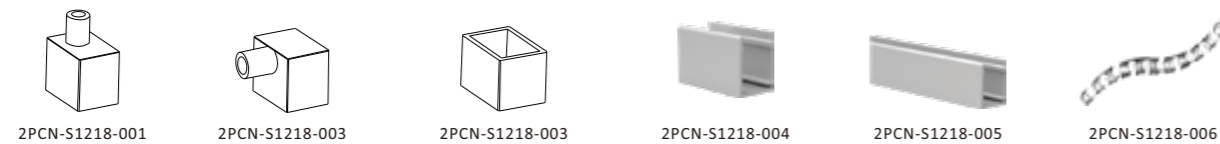

Item#	Description
2PCN-S1218-001	Silicone material, for 12*18mm end cap with hole for wire, come out in strange
2PCN-S1218-002	Silicone material, for 12*18mm end cap with hole for wire, come out from side
2PCN-S1218-003	Silicone material, for 12*18mm end cap without hole
2PCN-S1218-004	Aluminum clips, 2mm lenght
2PCN-S1218-005	Aluminum channel for 12*18mm one meter length
2PCN-S1218-006	Flexible Aluminum channel for 12*18mm one meter length

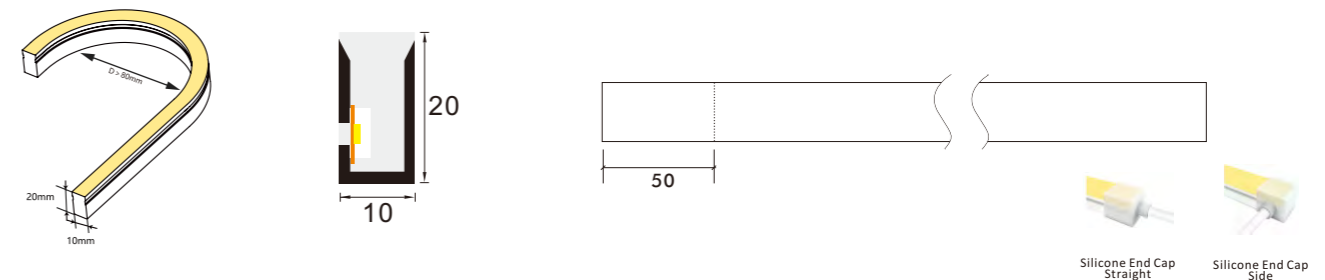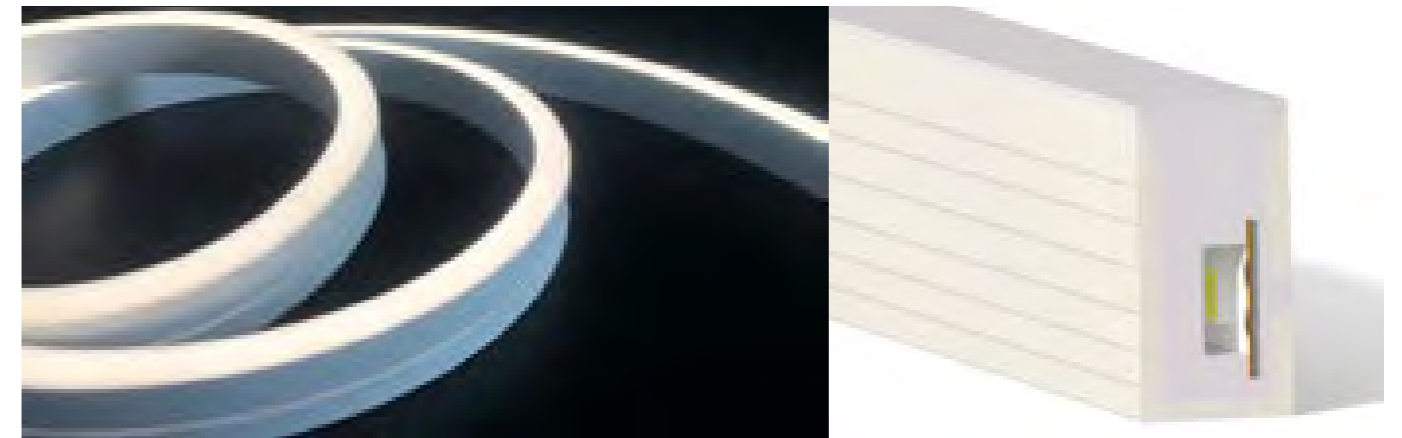


**24V DC Side Bend 10\*20mm Neon flex**


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-S1020	24	12	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-S1020MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-S1020	24	16	240	574	41	CCT	90	50	120
N10W67-2835TC-024CV-168S-MY3-S1020	24	12	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-4040FC-024CV-126S-MY3-S1020	24	12	126	N/A	N/A	RGBW	N/A	55.5	120

\*The neon flex will come with 5 meters /reel  
 \*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**

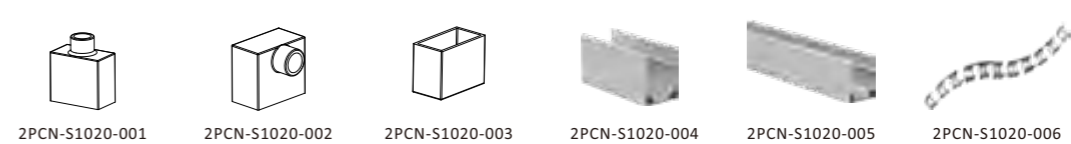

Item#	Description
2PCN-S1020-001	Silicone material, for 10*20mm end cap with hole for wire, come out in strange
2PCN-S1020-002	Silicone material, for 10*20mm end cap with hole for wire, come out from side
2PCN-S1020-003	Silicone material, for 10*20mm end cap without hole
2PCN-S1020-004	Aluminum clips, 2mm lenght
2PCN-S1020-005	Aluminum channel for 10*20mm one meter length
2PCN-S1020-006	Flexible Aluminum channel for 10*20mm one meter length

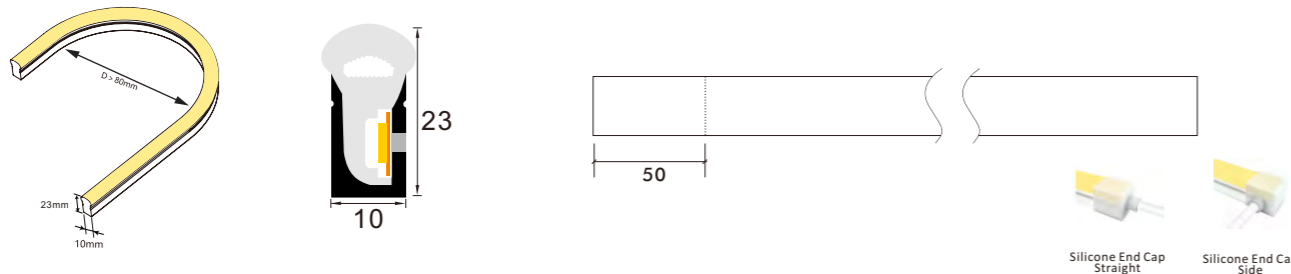

**24V DC Side Bend 10\*23mm Neon flex**


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-S1023	24	14	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-S1023MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-S1023	24	16	240	574	41	CCT	90	50	120
N10W67-2835TC-024CV-168S-MY3-S1023	24	16	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-4040FC-024AD-126S-MY3-S1023	24	15	84	N/A	N/A	RGBW SPI	N/A	71.4	120

\*The neon flex will come with 5 meters /reel  
 \*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**



Item#	Description
2PCN-S1023-001	Silicone material, for 10*22mm end cap with hole for wire, come out in strange
2PCN-S1023-002	Silicone material, for 10*22mm end cap with hole for wire, come out from side
2PCN-S1023-002A	Silicone material, for 10*22mm end cap with hole for wire, come out from side
2PCN-S1023-003	Silicone material, for 10*22mm end cap without hole
2PCN-S1023-004	Aluminum clips, 2mm length
2PCN-S1023-005	Aluminum channel for 10*22mm one meter length
2PCN-S1023-006	Flexible Aluminum channel for 10*22mm one meter length

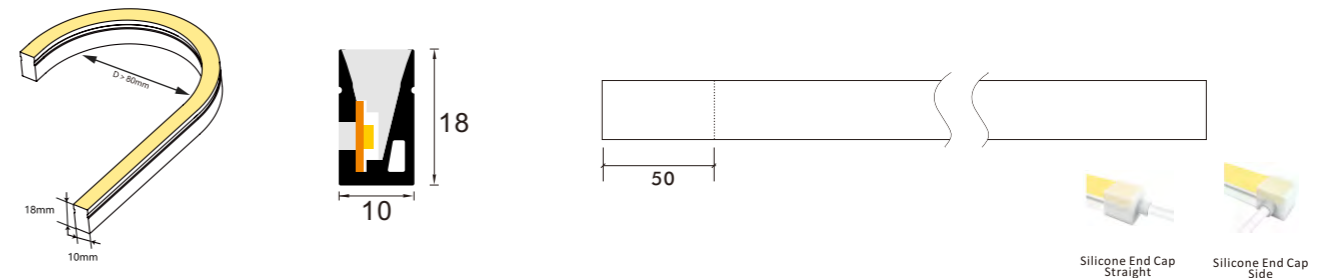


**24V DC Side Bend 10\*18mm Neon flex**


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-S1018	24	12	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-S1018MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-S1018	24	16	240	574	41	CCT	90	50	120
N10W67-3838TC-024CV-168S-MY3-S1018	24	12	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-4040FC-024CV-126S-MY3-S1018	24	12	126	N/A	N/A	RGBW	N/A	55.5	120

\*The neon flex will come with 5 meters /reel  
 \*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**

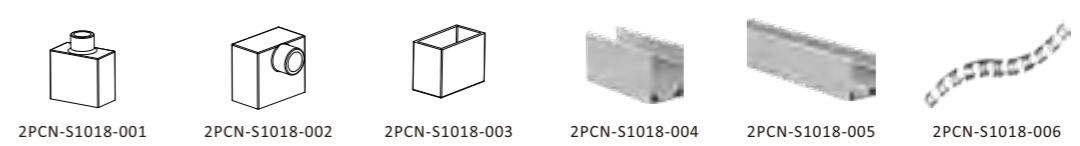

Item#	Description
2PCN-S1018-001	Silicone material, for 10*18mm end cap with hole for wire, come out in strange
2PCN-S1018-002	Silicone material, for 10*18mm end cap with hole for wire, come out from side
2PCN-S1018-003	Silicone material, for 10*18mm end cap without hole
2PCN-S1018-004	Aluminum clips, 2mm length
2PCN-S1018-005	Aluminum channel for 10*18mm one meter length
2PCN-S1018-006	Flexible Aluminum channel for 10*18mm one meter length

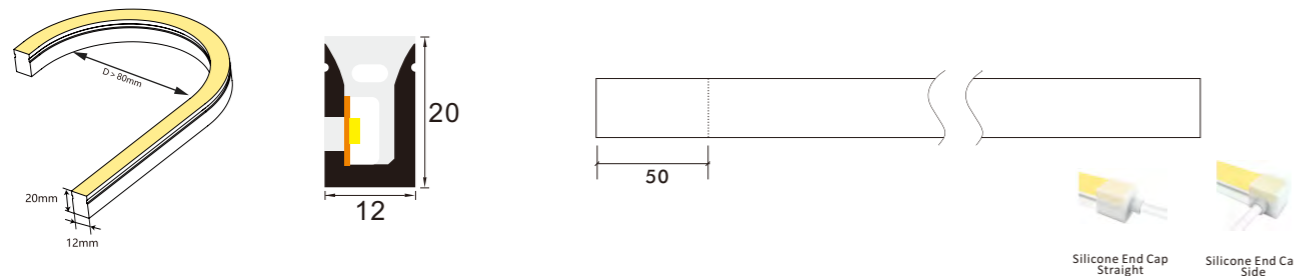



**24V DC Side Bend 12\*20mm Neon flex**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-S1220	24	14	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-S1220MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-S1220	24	16	240	574	41	CCT	90	50	120
N10W67-2835TC-024CV-168S-MY3-S1220	24	16	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-5050FC-024CV-096S-MY3-S1220	24	20	96	N/A	N/A	RGBW	N/A	62.5	120
N10W67-5050MC-024AD-084S-MY3-S1220	24	15	84	N/A	N/A	RGBW SPI	N/A	71.4	120
N10W67-5050MC-024CV-096DMX-MY3-S1220	24	20	96	N/A	N/A	RGBW DMX	N/A	62.5	120

**Optional Accessories**



Item#	Description
2PCN-S1220-001	Silicone material, for 12*20mm end cap with hole for wire, come out in strange
2PCN-S1220-002	Silicone material, for 12*20mm end cap with hole for wire, come out from side
2PCN-S1220-003	Silicone material, for 12*20mm end cap without hole
2PCN-S1220-004	Aluminum clips, 2mm lenght
2PCN-S1220-005	Aluminum channel for 12*20mm one meter length
2PCN-S1220-006	Flexible Aluminum channel for 12*20mm one meter length

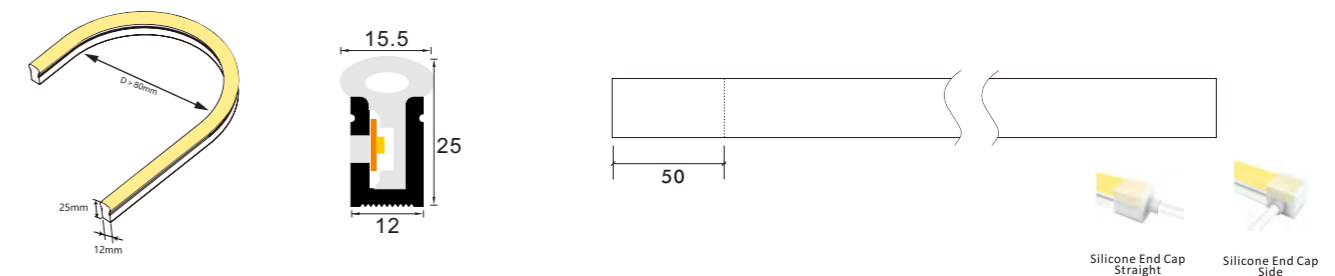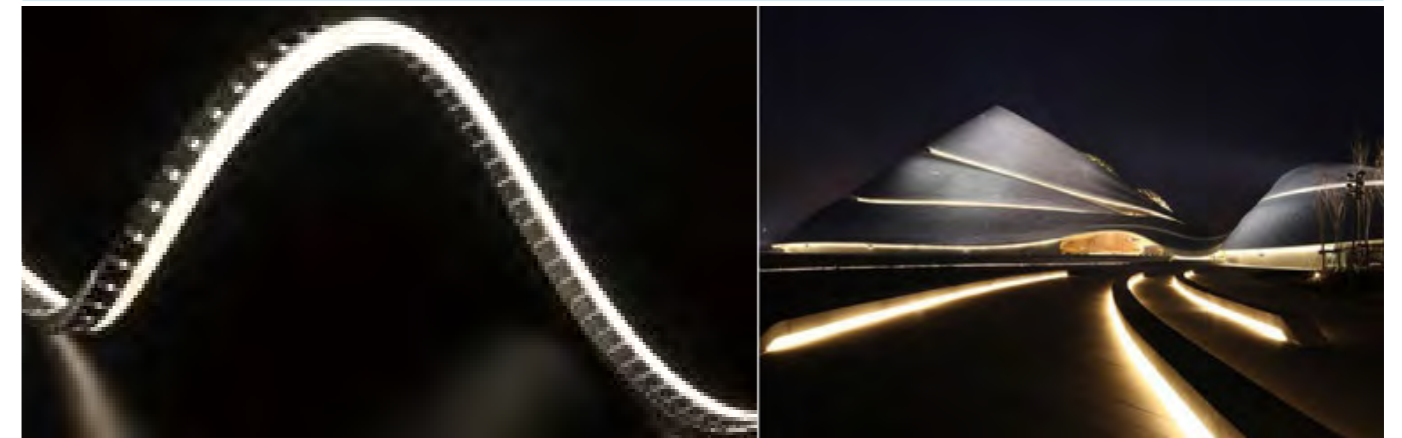

**24V DC Side Bend 12\*25mm Neon flex**



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-S1225	24	14	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-S1225MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-S1225	24	16	240	656	41	CCT	90	50	120
N10W67-3838TC-024CV-168S-MY3-S1225	24	16	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-5050MC-024AD-084S-MY3-S1225	24	15	84	N/A	N/A	RGBW SPI	N/A	71.4	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**



Item#	Description
2PCN-S1225-001	Silicone material, for 12*25mm end cap with hole for wire, come out in strange
2PCN-S1225-002	Silicone material, for 12*25mm end cap with hole for wire, come out from side
2PCN-S1225-002A	Silicone material, for 12*25mm end cap with hole for wire, come out from side
2PCN-S1225-003	Silicone material, for 12*25mm end cap without hole
2PCN-S1225-004	Aluminum clips, 2mm lenght
2PCN-S1225-005	Aluminum channel for 12*25mm one meter length
2PCN-S1225-006	Flexible Aluminum channel for 12*25mm one meter length

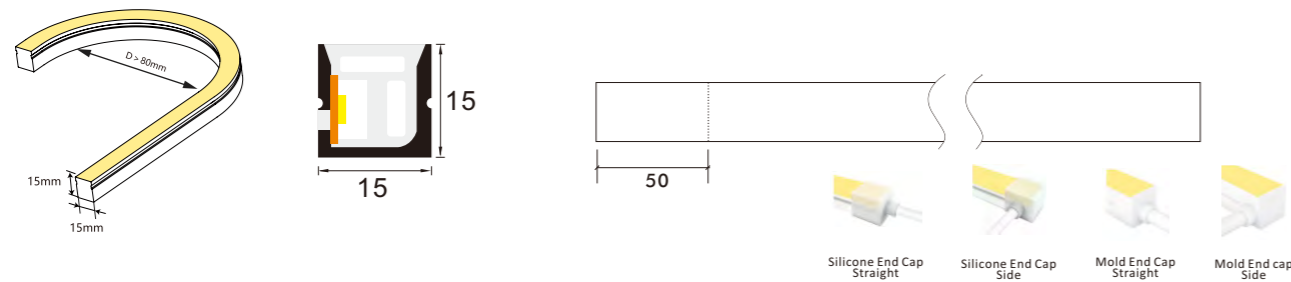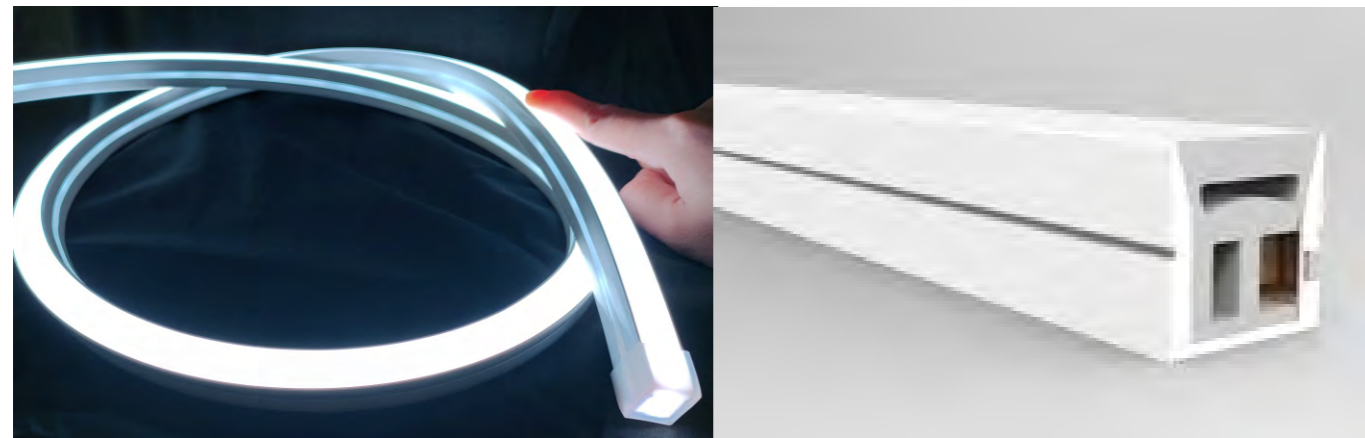

**24V DC Side Bend 15\*15mm Neon flex**


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-S1515	24	14	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-S1515MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-S1515	24	16	240	656	41	CCT	90	50	120
N10W67-3838TC-024CV-168S-MY3-S1515	24	16	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-5050MC-024AD-084S-MY3-S1515	24	15	84	N/A	N/A	RGBW SPI	N/A	71.4	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**




Item#	Description
2PCN-1515-001	Silicone material, for 15*15mm end cap with hole for wire, come out in strange
2PCN-1515-002	Silicone material, for 15*15mm end cap with hole for wire, come out from side
2PCN-1515-003	Silicone material, for 15*15mm end cap without hole
2PCN-1515-004	Aluminum clips, 2mm lenght
2PCN-1515-005	Aluminum channel for 15*15mm one meter length

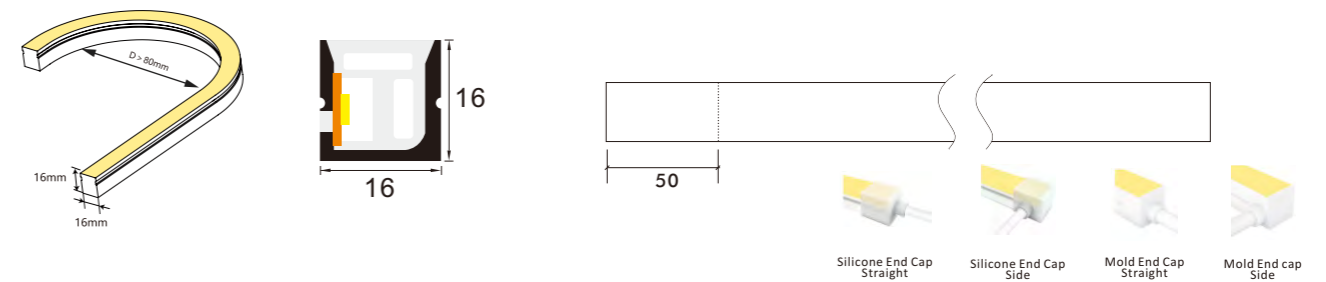


**24V DC Side Bend 16\*16mm Neon flex**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-S1616	24	14	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-S1616MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-S1616	24	16	240	574	41	CCT	90	50	120
N10W67-2835TC-024CV-168S-MY3-S1616	24	16	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-5050FC-024CV-096S-MY3-S1616	24	20	96	N/A	N/A	RGBW	N/A	62.5	120
N10W67-5050MC-024AD-084S-MY3-S1616	24	15	84	N/A	N/A	RGBW SPI	N/A	71.4	120
N10W67-5050MC-024CV-096DMX-MY3-S1616	24	20	96	N/A	N/A	RGBW DMX	N/A	62.5	120

**Optional Accessories**

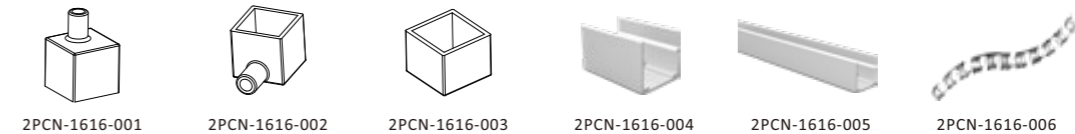

Item#	Description
2PCN-1616-001	Silicone material, for 16*16mm end cap with hole for wire, come out in strange
2PCN-1616-002	Silicone material, for 16*16mm end cap with hole for wire, come out from side
2PCN-1616-003	Silicone material, for 16*16mm end cap without hole
2PCN-1616-004	Aluminum clips, 2mm lenght
2PCN-1616-005	Aluminum channel for 16*16mm one meter length
2PCN-1616-006	Flexible Aluminum channel for 16*16mm one meter length

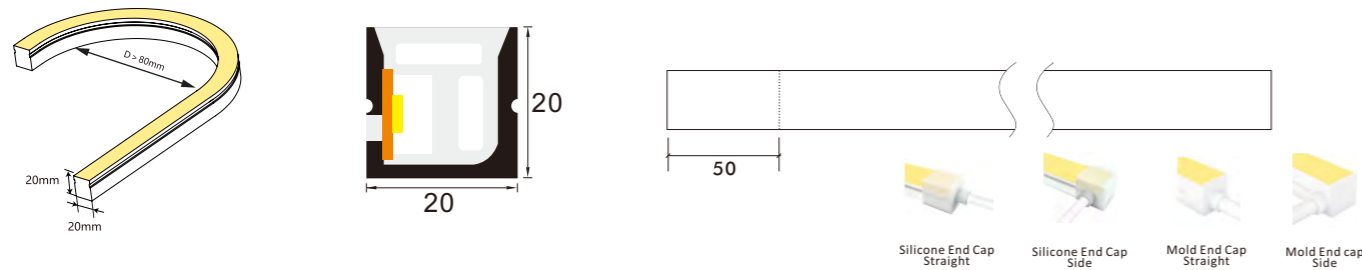

**24V DC Side Bend 20\*20mm Neon flex**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-S2020	24	14	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-S2020MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-S2020	24	16	240	574	41	CCT	90	50	120
N10W67-2835TC-024CV-168S-MY3-S2020	24	16	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-5050FC-024CV-096S-MY3-S2020	24	20	96	N/A	N/A	RGBW	N/A	62.5	120
N10W67-5050MC-024AD-084S-MY3-S2020	24	15	84	N/A	N/A	RGBW SPI	N/A	71.4	120
N10W67-5050MC-024CV-096DMX-MY3-S2020	24	20	96	N/A	N/A	RGBW DMX	N/A	62.5	120

**Optional Accessories**




Item#	Description
2PCN-2020-001	Silicone material, for 20*20mm end cap with hole for wire, come out in strange
2PCN-2020-002	Silicone material, for 20*20mm end cap with hole for wire, come out from side
2PCN-2020-003	Silicone material, for 20*20mm end cap without hole
2PCN-2020-004	Aluminum clips, 2mm lenght
2PCN-2020-005	Aluminum channel for 20*20mm one meter length
2PCN-2020-006	Flexible Aluminum channel for 20*20mm one meter length



# Top bend Neon flex



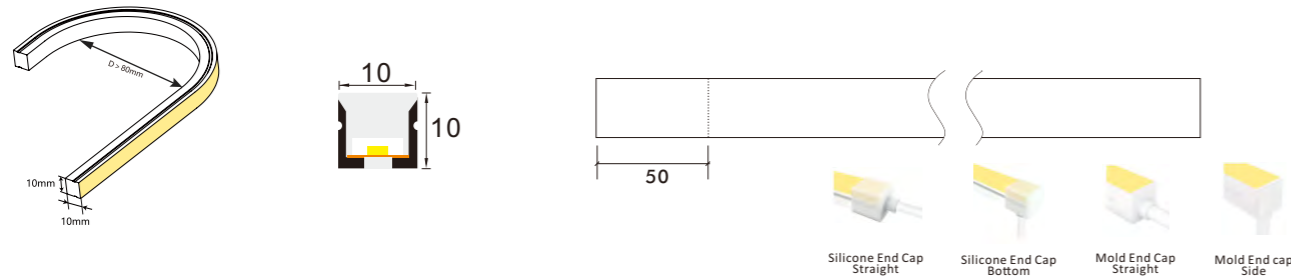

**24V DC Top Bend 10\*10mm Neon flex**


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N08W67-2835XX-024CV-140S-MY3-T1010	24	12	140	660	55	WHITE	80/90	50	120
N08W67-2835XX-024CV-120S-MY3-T1010MC	24	12	120	492	41	WHITE	80/90	16.6	120
N08W67-2216TW-024CV-240S-MY3-T1010	24	12	240	492	41	CCT	90	50	120
N08W67-2835TC-024CV-120S-MY3-T1010	24	12	120	N/A	N/A	RGB	N/A	50	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**



Item#	Discription
2PCN-1010-001	Silicone material, for 10*10mm end cap with hole for wire, come out in strange
2PCN-1010-002	Silicone material, for 10*10mm end cap with hole for wire, come out from side
2PCN-1010-003	Silicone material, for 10*10mm end cap without hole
2PCN-1010-004	Aluminum clips, 2mm lenght
2PCN-1010-005	Aluminum channel for 10*10mm one meter length
2PCN-1010-006	Flexible Aluminum channel for 10*10mm one meter length

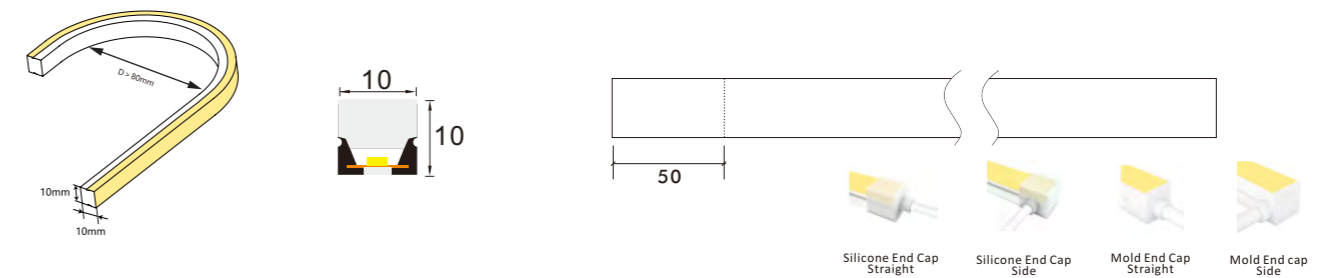

**24V DC Top Bend 10\*10mm Neon flex**



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N08W67-2835XX-024CV-140S-MY3-T1010U	24	12	140	660	55	WHITE	80/90	50	120
N08W67-2835XX-024CV-120S-MY3-T1010UMC	24	12	120	492	41	WHITE	80/90	16.6	120
N08W67-2216TW-024CV-240S-MY3-T1010U	24	12	240	492	41	CCT	90	50	120
N08W67-2835TC-024CV-120S-MY3-T1010U	24	12	120	N/A	N/A	RGB	N/A	50	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**




Item#	Discription
2PCN-1010-001	Silicone material, for 10*10mm end cap with hole for wire, come out in strange
2PCN-1010-002	Silicone material, for 10*10mm end cap with hole for wire, come out from side
2PCN-1010-003	Silicone material, for 10*10mm end cap without hole
2PCN-1010-004	Aluminum clips, 2mm lenght
2PCN-1010-005	Aluminum channel for 10*10mm one meter length
2PCN-1010-006	Flexible Aluminum channel for 10*10mm one meter length

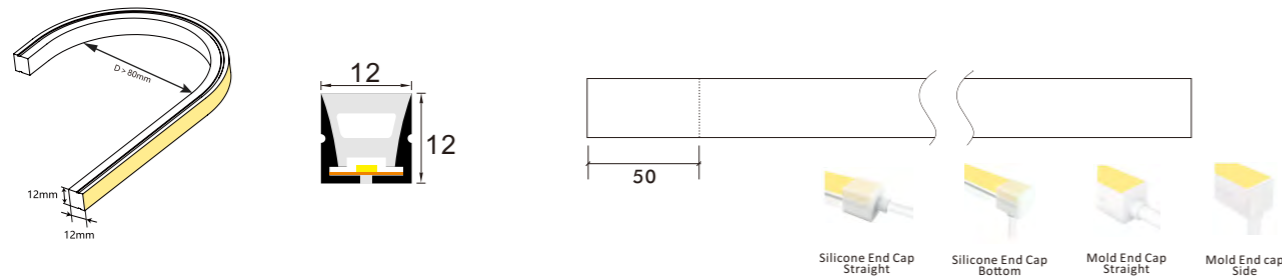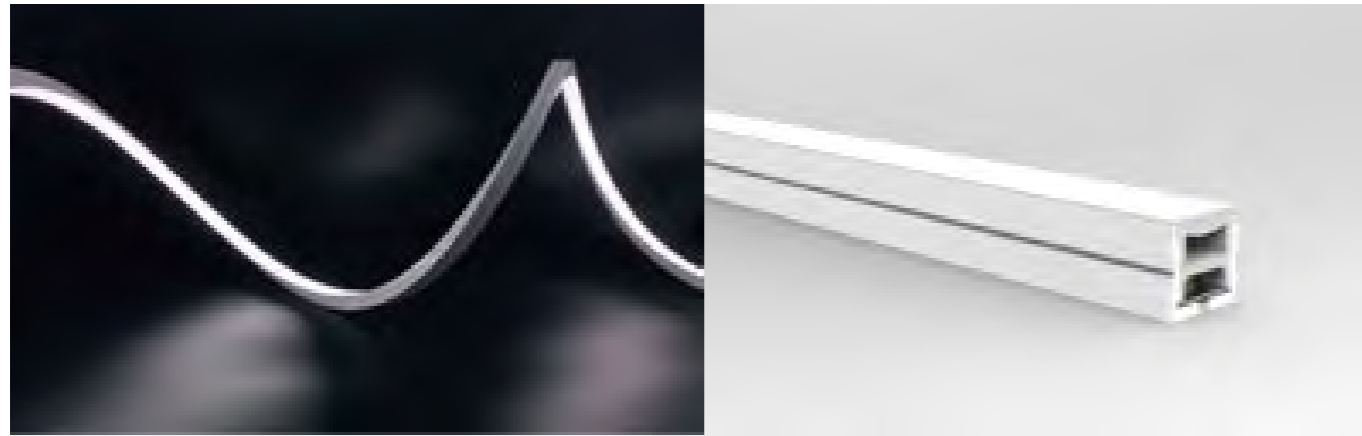


**24V DC Top Bend 12\*12mm Neon flex**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-T1212	24	12	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-T1212MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-T1212	24	12	240	492	41	CCT	90	50	120
N10W67-2835XX-230CC-120S-MY3-T1023	230	15	120	1125	75	WHITE	80/90	100	120
N10W67-2835TC-024CV-168S-MY3-T1023	24	16	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-4040FC-024AD-126S-MY3-T1023	24	16.8	84	N/A	N/A	RGBW SPI	N/A	71.4	120

**Optional Accessories**

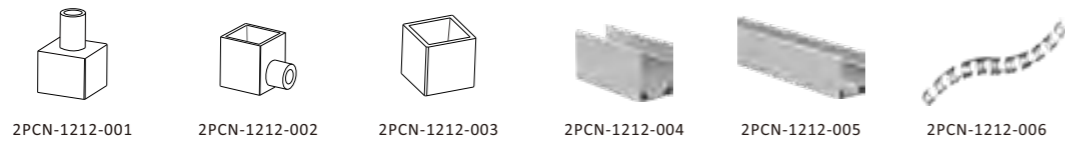

Item#	Description
2PCN-1212-001	Silicone material, for 12*12mm end cap with hole for wire, come out in strange
2PCN-1212-002	Silicone material, for 12*12mm end cap with hole for wire, come out from side
2PCN-1212-003	Silicone material, for 12*12mm end cap without hole
2PCN-1212-004	Aluminum clips, 2mm length
2PCN-1212-005	Aluminum channel for 12*12mm one meter length
2PCN-1212-006	Flexible Aluminum channel for 12*12mm one meter length

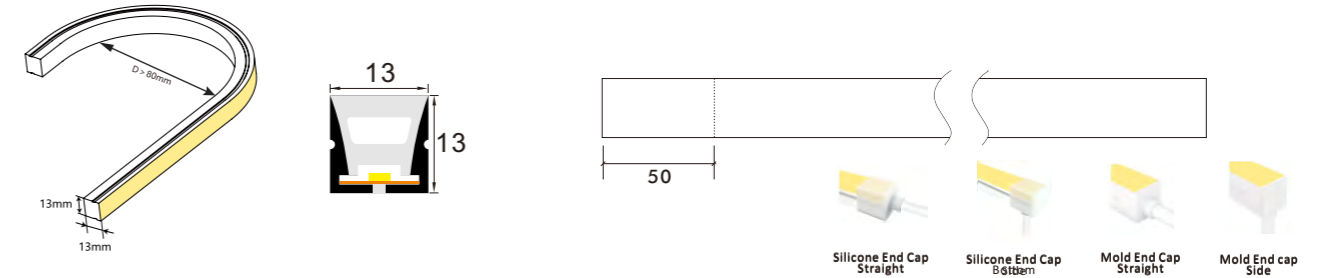

**24V DC Top Bend 13\*13mm Neon flex**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-T1313	24	12	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-T1313MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-T1313	24	16	240	574	41	CCT	90	50	120
N10W67-3838TC-024CV-168S-MY3-T1313	24	12	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-4040FC-024CV-126S-MY3-T1313	24	12	126	N/A	N/A	RGBW	N/A	55.5	120



\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**



Item#	Description
2PCN-1313-001	Silicone material, for 13*13mm end cap with hole for wire, come out in strange
2PCN-1313-002	Silicone material, for 13*13mm end cap with hole for wire, come out from side
2PCN-1313-003	Silicone material, for 13*13mm end cap without hole
2PCN-1313-004	Aluminum clips, 2mm length
2PCN-1313-005	Aluminum channel for 13*13mm one meter length
2PCN-1313-006	Flexible Aluminum channel for 13*13mm one meter length

T1313T

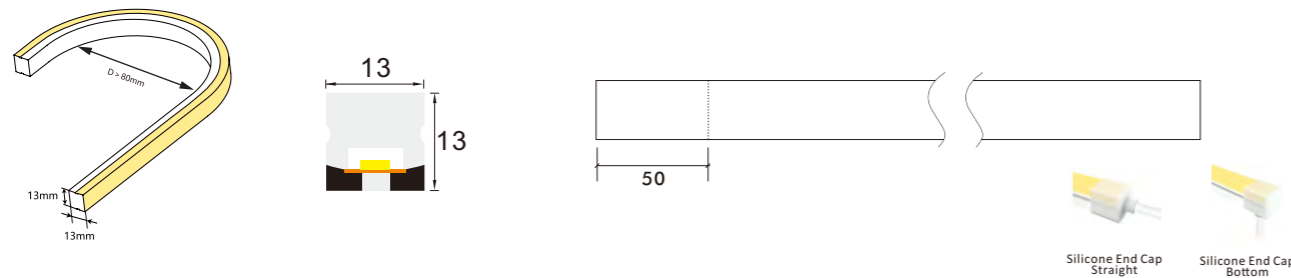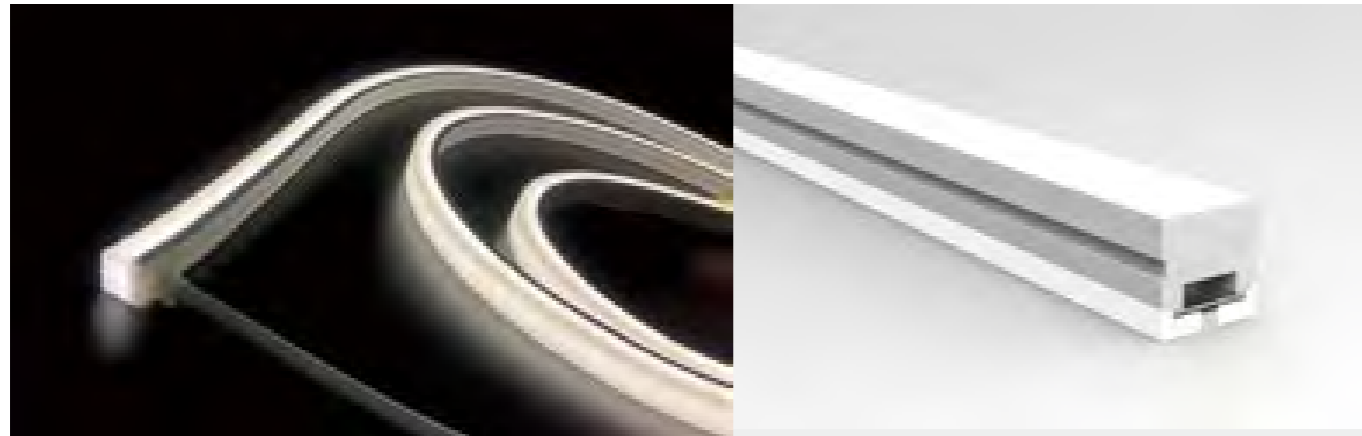

**24V DC Top Bend 13\*13mm Neon flex**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-T1313T	24	12	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-T1313TMC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-T1313T	24	16	240	574	41	CCT	90	50	120
N10W67-3838TC-024CV-168S-MY3-T1313T	24	12	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-4040FC-024CV-126S-MY3-T1313T	24	12	126	N/A	N/A	RGBW	N/A	55.5	120


\*The neon flex will come with 5 meters /reel  
 \*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**



Item#	Discription
2PCN-1313-001	Silicone material, for 13*13mm end cap with hole for wire, come out in strange
2PCN-1313-002	Silicone material, for 13*13mm end cap with hole for wire, come out from side
2PCN-1313-003	Silicone material, for 13*13mm end cap without hole
2PCN-1313-004	Aluminum clips, 2mm lenght
2PCN-1313-005	Aluminum channel for 13*13mm one meter length
2PCN-1313-006	Flexible Aluminum channel for 13*13mm one meter length


T1515

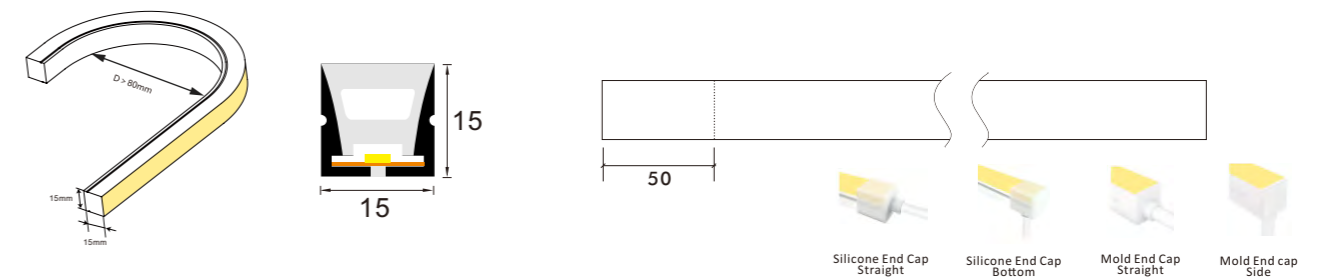

**24V DC Top Bend 15\*15mm Neon flex**


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-T1515	24	14	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-T1515MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-T1515	24	16	240	574	41	CCT	90	50	120
N10W67-2835TC-024CV-168S-MY3-T1515	24	16	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-5050FC-024CV-096S-MY3-T1515	24	20	96	N/A	N/A	RGBW	N/A	62.5	120
N10W67-5050MC-024AD-084S-MY3-T1515	24	15	84	N/A	N/A	RGBW SPI	N/A	71.4	120
N10W67-5050MC-024CV-096DMX-MY3-T1515	24	20	96	N/A	N/A	RGBW DMX	N/A	62.5	120

**Optional Accessories**

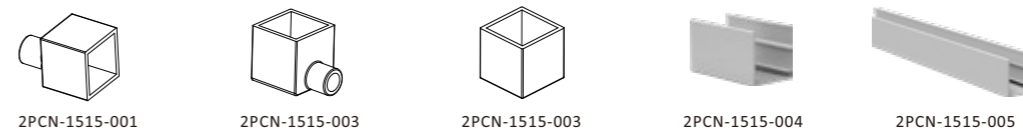

Item#	Discription
2PCN-1515-001	Silicone material, for 15*15mm end cap with hole for wire, come out in strange
2PCN-1515-002	Silicone material, for 15*15mm end cap with hole for wire, come out from side
2PCN-1515-003	Silicone material, for 15*15mm end cap without hole
2PCN-1515-004	Aluminum clips, 2mm lenght
2PCN-1515-005	Aluminum channel for 15*15mm one meter length

T1616

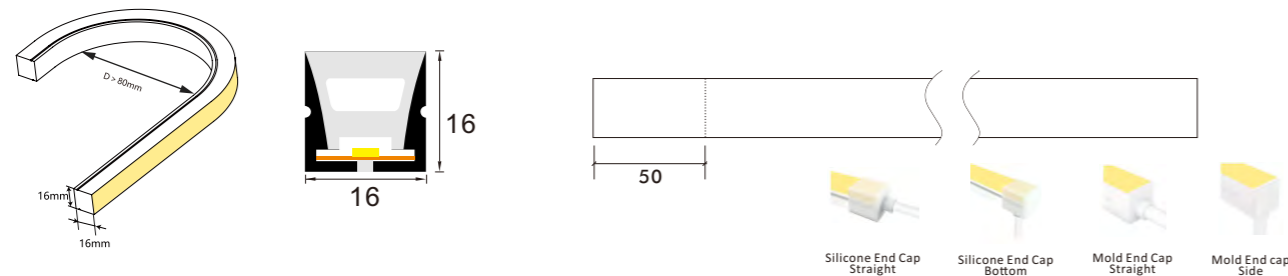


24V DC

Top Bend 16\*16mm Neon flex


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-T1616	24	14	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-T1616MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2835XX-230CC-120S-MY3-T1616	24	15	120	1125	75	WHITE	80/90	100	120
N10W67-2216TW-024CV-240S-MY3-T1616	24	16	240	574	41	CCT	90	50	120
N10W67-2835TC-024CV-168S-MY3-T1616	24	16	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-5050FC-024CV-096S-MY3-T1616	24	20	96	N/A	N/A	RGBW	N/A	62.5	120
N10W67-5050MC-024AD-084S-MY3-T1616	24	15	84	N/A	N/A	RGBW SPI	N/A	71.4	120
N10W67-5050MC-024CV-096DMX-MY3-T1616	24	20	96	N/A	N/A	RGBW DMX	N/A	62.5	120

Optional Accessories

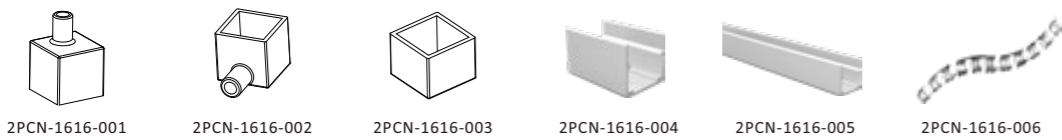

Item#	Discription
2PCN-1616-001	Silicone material, for 16*16mm end cap with hole for wire, come out in strange
2PCN-1616-002	Silicone material, for 16*16mm end cap with hole for wire, come out from side
2PCN-1616-003	Silicone material, for 16*16mm end cap without hole
2PCN-1616-004	Aluminum clips, 2mm lenght
2PCN-1616-005	Aluminum channel for 16*16mm one meter length
2PCN-1616-006	Flexible Aluminum channel for 16*16mm one meter length

T2014

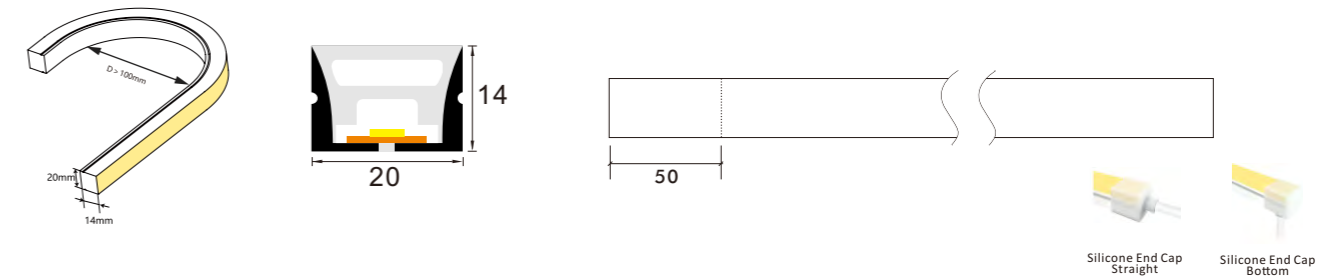


24V DC

Top Bend 20\*14mm Neon flex


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-T2014	24	14	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-T2014MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-T2014	24	16	240	574	41	CCT	90	50	120
N10W67-2835TC-024CV-168S-MY3-T2014	24	16	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-5050FC-024CV-096S-MY3-T2014	24	20	96	N/A	N/A	RGBW	N/A	62.5	120
N10W67-5050MC-024AD-084S-MY3-T2014	24	15	84	N/A	N/A	RGBW SPI	N/A	71.4	120
N10W67-2835XX-024CV-120DMX-MY3-T2014	24	18	120	738	41	WHITE DMX	N/A	100	120
N10W67-5050MC-024CV-096DMX-MY3-T2014	24	20	96	N/A	N/A	RGBW DMX	N/A	62.5	120

Optional Accessories

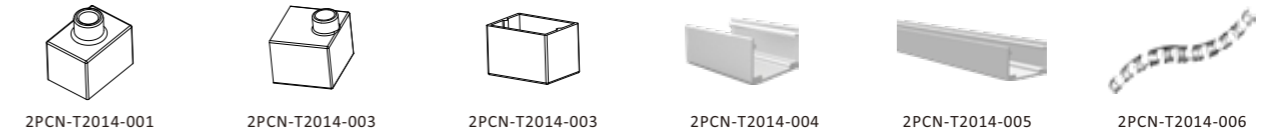

Item#	Discription
2PCN-T2014-001	Silicone material, for 20*14mm end cap with hole for wire, come out in strange
2PCN-T2014-002	Silicone material, for 20*14mm end cap with hole for wire, come out from side
2PCN-T2014-003	Silicone material, for 20*14mm end cap without hole
2PCN-T2014-004	Aluminum clips, 2mm lenght
2PCN-T2014-005	Aluminum channel for 20*14mm one meter length
2PCN-T2014-006	Flexible Aluminum channel for 20*14mm one meter length

T2020

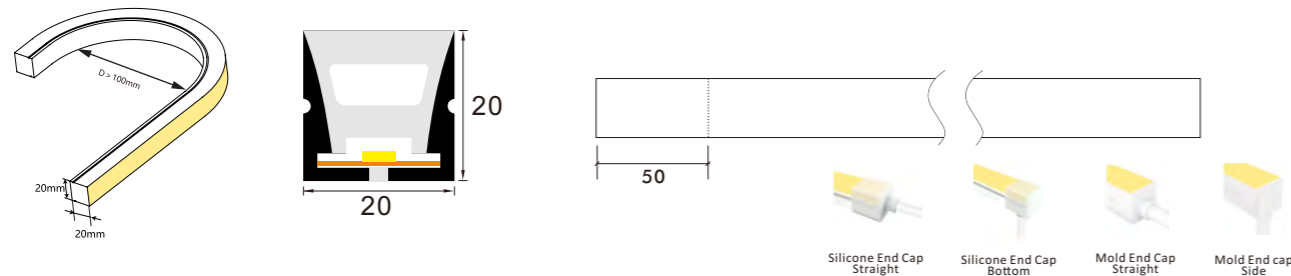


24V DC

Top Bend 20\*20mm Neon flex


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-T2020	24	14	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-T2020MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2216TW-024CV-240S-MY3-T2020	24	16	240	574	41	CCT	90	50	120
N10W67-2835TC-024CV-168S-MY3-T2020	24	16	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-5050FC-024CV-096S-MY3-T2020	24	20	96	N/A	N/A	RGBW	N/A	62.5	120
N10W67-5050MC-024AD-084S-MY3-T2020	24	15	84	N/A	N/A	RGBW SPI	N/A	71.4	120
N10W67-5050MC-024CV-096DMX-MY3-T2020	24	20	96	N/A	N/A	RGBW DMX	N/A	62.5	120

Optional Accessories

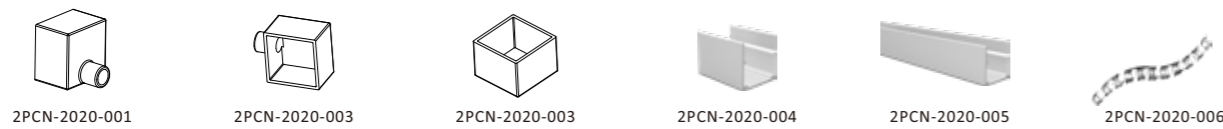

Item#	Description
2PCN-2020-001	Silicone material, for 20*20mm end cap with hole for wire, come out in strange
2PCN-2020-002	Silicone material, for 20*20mm end cap with hole for wire, come out from side
2PCN-2020-003	Silicone material, for 20*20mm end cap without hole
2PCN-2020-004	Aluminum clips, 2mm length
2PCN-2020-005	Aluminum channel for 20*20mm one meter length
2PCN-2020-006	Flexible Aluminum channel for 20*20mm one meter length

T2727

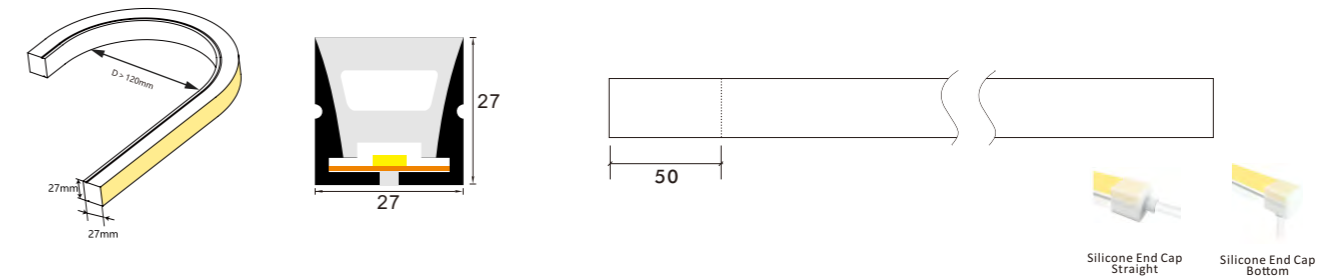


24V DC

Top Bend 27\*27mm Neon flex

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N15W67-283527-024CV-140S-MY3-T1515	24	14	140	560	40	2700	80/90	50	120
N15W67-283527-024CV-140S-MY3-T1515	24	14	140	630	45	3000	80/90	50	120
N15W67-283527-024CV-140S-MY3-T1515	24	14	140	770	55	4000	80/90	50	120
N15W67-283527-024CV-140S-MY3-T1515	24	14	140	630	45	6000	80/90	50	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.



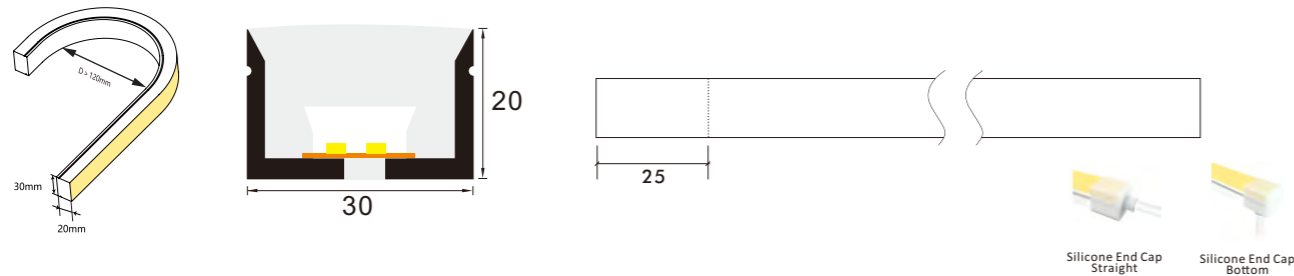

**24V DC Top Bend 30\*20mm Neon flex**


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N15W67-283527-024CV-240S-MY3-T3020	24	20	240	800	40	2700	80/90	25	120
N15W67-283527-024CV-240S-MY3-T3020	24	20	240	900	45	3000	80/90	25	120
N15W67-283527-024CV-240S-MY3-T3020	24	20	240	1100	55	4000	80/90	25	120
N15W67-283527-024CV-240S-MY3-T3020	24	20	240	900	45	6000	80/90	25	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**




Item#	Description
2PCN-T3020-001	Silicone material, for 30*20mm end cap with hole for wire, come out in strange
2PCN-T3020-003	Silicone material, for 30*20mm end cap without hole
2PCN-T3020-004	Aluminum clips, 2mm length
2PCN-T3020-005	Aluminum channel for 30*20mm one meter length
2PCN-T3020-006	Flexible Aluminum channel for 30*20mm one meter length

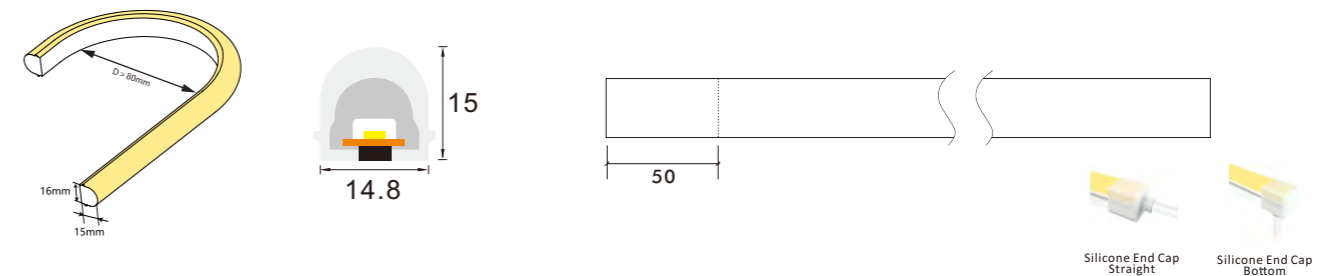

**24V DC Top Bend D16\*15mm Neon flex**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N10W67-2835XX-024CV-140S-MY3-D1615	24	14	140	660	55	WHITE	80/90	50	120
N10W67-2835XX-024CV-168S-MY3-D1615MC	24	14	168	620	45	WHITE	80/90	11.9	120
N10W67-2835XX-230CC-120S-MY3-D1615	24	15	120	1125	75	WHITE	80/90	100	120
N10W67-2216TW-024CV-240S-MY3-D1615	24	16	240	574	41	CCT	90	50	120
N10W67-2835TC-024CV-168S-MY3-D1615	24	16	168	N/A	N/A	RGB	N/A	35.7	120
N10W67-5050FC-024CV-096S-MY3-D1615	24	20	96	N/A	N/A	RGBW	N/A	62.5	120
N10W67-5050MC-024AD-084S-MY3-D1615	24	15	84	N/A	N/A	RGBW SPI	N/A	71.4	120
N10W67-5050MC-024CV-096DMX-MY3-D1615	24	20	96	N/A	N/A	RGBW DMX	N/A	62.5	120


**Optional Accessories**

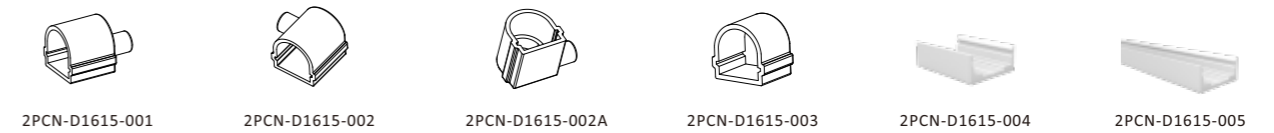

Item#	Description
2PCN-D1615-001	Silicone material, for 16*15mm end cap with hole for wire, come out in strange
2PCN-D1615-002	Silicone material, for 16*15mm end cap with hole for wire, come out from side
2PCN-D1615-002A	Silicone material, for 16*15mm end cap with hole for wire, come out from side
2PCN-D1615-003	Silicone material, for 16*15mm end cap without hole
2PCN-D1615-004	Aluminum clips, 2mm length
2PCN-D1615-005	Aluminum channel for 16*15mm one meter length

# 3D Bend Neon flex



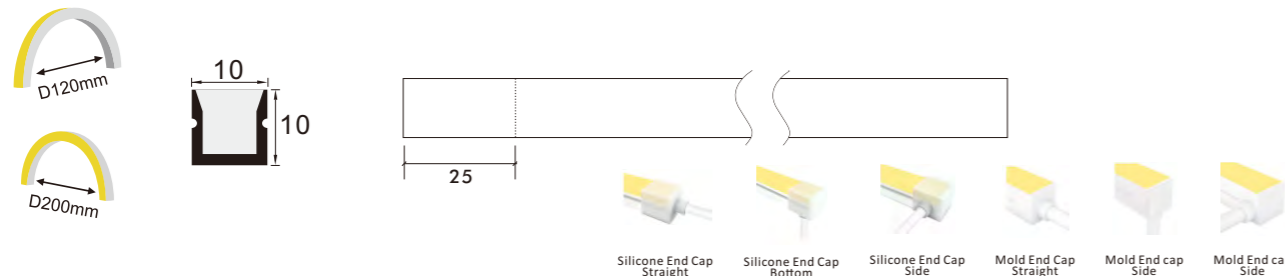

**24V DC 3D Bend 10\*10mm Neon flex**


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N04W67-283527-024CV-280S-MY3-T1010	24	6	280	240	40	2700	80/90	25	120
N04W67-283527-024CV-280S-MY3-T1010	24	6	280	270	45	3000	80/90	25	120
N04W67-283527-024CV-280S-MY3-T1010	24	6	280	330	55	4000	80/90	25	120
N04W67-283527-024CV-280S-MY3-T1010	24	6	280	270	45	6000	80/90	25	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**



Item#	Discription
2PCN-1010-001	Silicone material, for 10*10mm end cap with hole for wire, come out in strange
2PCN-1010-002	Silicone material, for 10*10mm end cap with hole for wire, come out from side
2PCN-1010-003	Silicone material, for 10*10mm end cap without hole
2PCN-1010-004	Aluminum clips, 2mm lenght
2PCN-1010-005	Aluminum channel for 10*10mm one meter length
2PCN-1010-006	Flexible Aluminum channel for 10*10mm one meter length

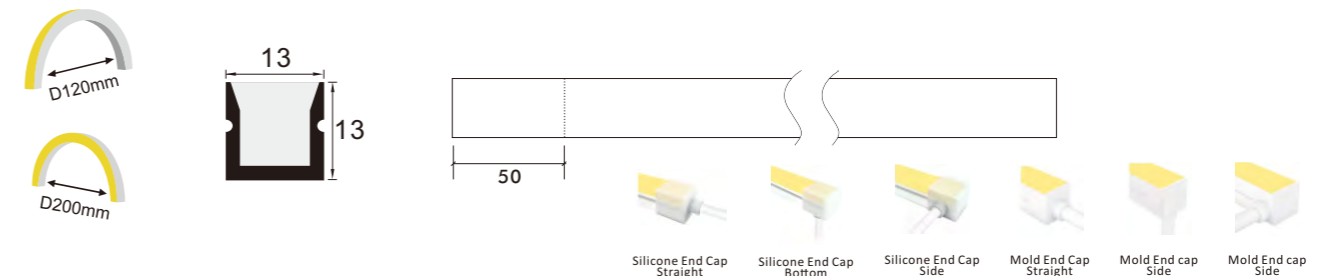


**24V DC 3D Bend 13\*13mm Neon flex**



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N06W67-283527-024CV-160S-MY3-T1313	24	6	160	240	40	2700	80/90	50	120
N06W67-283527-024CV-160S-MY3-T1313	24	6	160	270	45	3000	80/90	50	120
N06W67-283527-024CV-160S-MY3-T1313	24	6	160	330	55	4000	80/90	50	120
N06W67-283527-024CV-160S-MY3-T1313	24	6	160	270	45	6000	80/90	50	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**

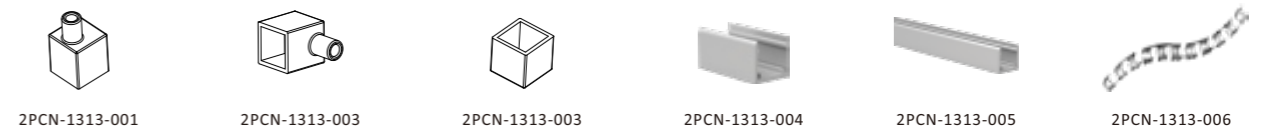

Item#	Discription
2PCN-1313-001	Silicone material, for 13*13mm end cap with hole for wire, come out in strange
2PCN-1313-002	Silicone material, for 13*13mm end cap with hole for wire, come out from side
2PCN-1313-003	Silicone material, for 13*13mm end cap without hole
2PCN-1313-004	Aluminum clips, 2mm lenght
2PCN-1313-005	Aluminum channel for 13*13mm one meter length
2PCN-1313-006	Flexible Aluminum channel for 13*13mm one meter length

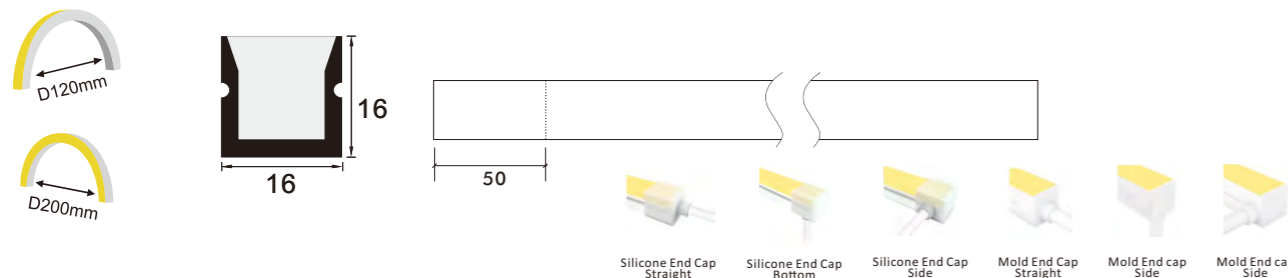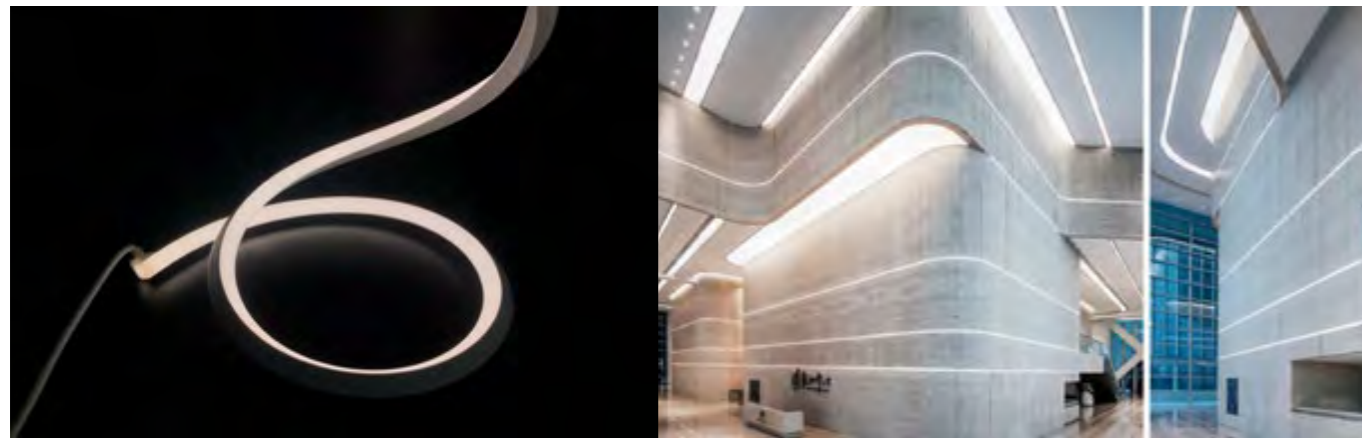


**24V DC 3D Bend 16\*16mm Neon flex**



Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N08W67-283527-024CV-140S-MY3-3D1616	24	12	140	480	40	2700	80/90	50	120
N08W67-283527-024CV-140S-MY3-3D1616	24	12	140	540	45	3000	80/90	50	120
N08W67-283527-024CV-140S-MY3-3D1616	24	12	140	660	55	4000	80/90	50	120
N08W67-283527-024CV-140S-MY3-3D1616	24	12	140	540	45	6000	80/90	50	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**

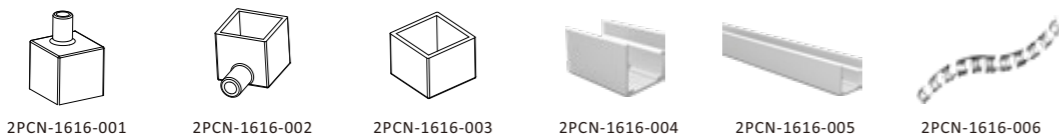

Item#	Discription
2PCN-1616-001	Silicone material, for 16*16mm end cap with hole for wire, come out in strange
2PCN-1616-002	Silicone material, for 16*16mm end cap with hole for wire, come out from side
2PCN-1616-003	Silicone material, for 16*16mm end cap without hole
2PCN-1616-004	Aluminum clips, 2mm lenght
2PCN-1616-005	Aluminum channel for 16*16mm one meter length
2PCN-1616-006	Flexible Aluminum channel for 16*16mm one meter length

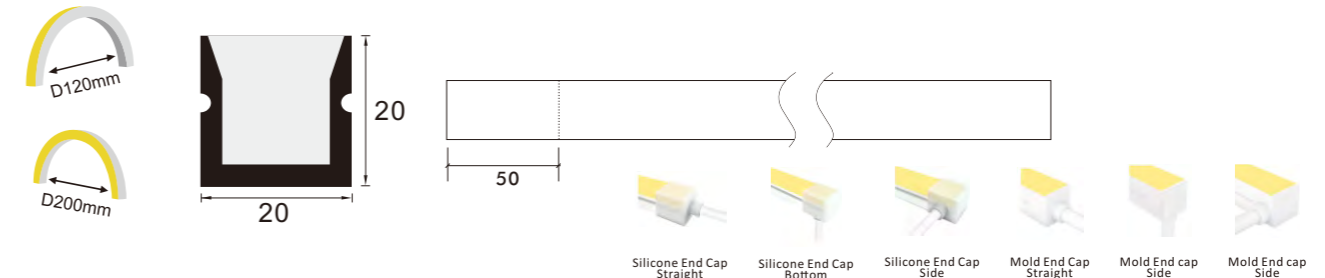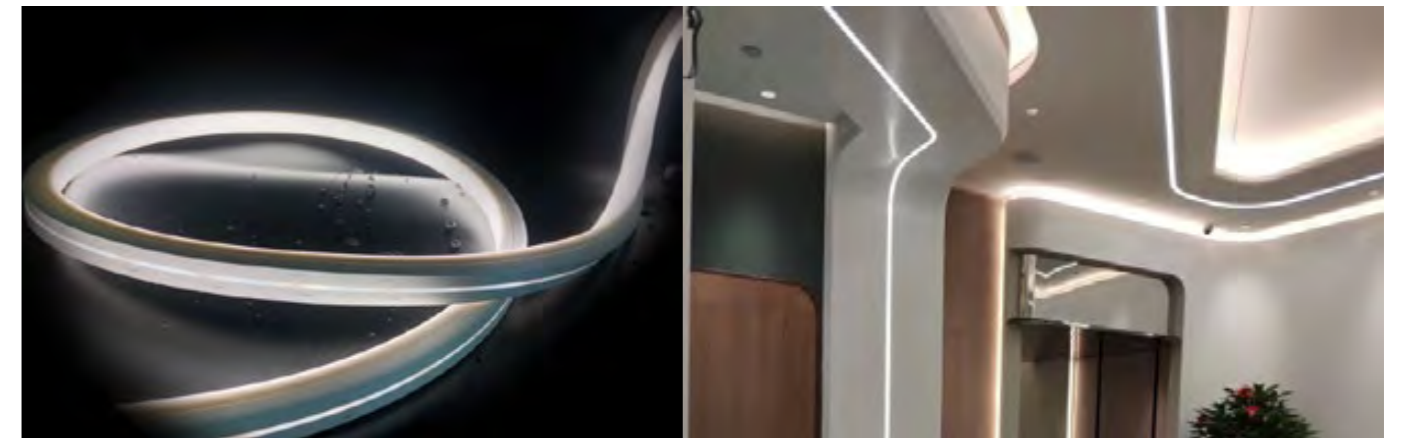


**24V DC 3D Bend 20\*20mm Neon flex**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N12W67-283527-024CV-140S-MY3-3D2020	24	14	140	560	40	2700	80/90	50	120
N12W67-283527-024CV-140S-MY3-3D2020	24	14	140	630	45	3000	80/90	50	120
N12W67-283527-024CV-140S-MY3-3D2020	24	14	140	770	55	4000	80/90	50	120
N12W67-283527-024CV-140S-MY3-3D2020	24	14	140	630	45	6000	80/90	50	120


\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Accessories**

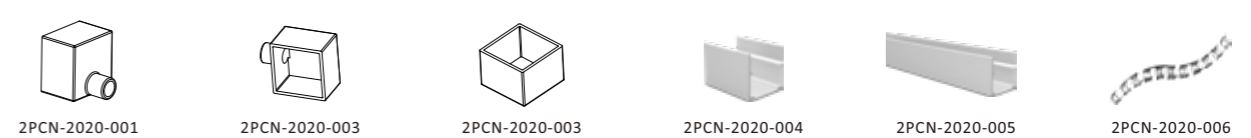

Item#	Discription
2PCN-2020-001	Silicone material, for 20*20mm end cap with hole for wire, come out in strange
2PCN-2020-002	Silicone material, for 20*20mm end cap with hole for wire, come out from side
2PCN-2020-003	Silicone material, for 20*20mm end cap without hole
2PCN-2020-004	Aluminum clips, 2mm lenght
2PCN-2020-005	Aluminum channel for 20*20mm one meter length
2PCN-2020-006	Flexible Aluminum channel for 20*20mm one meter length

# 360 Illumination Neon flex

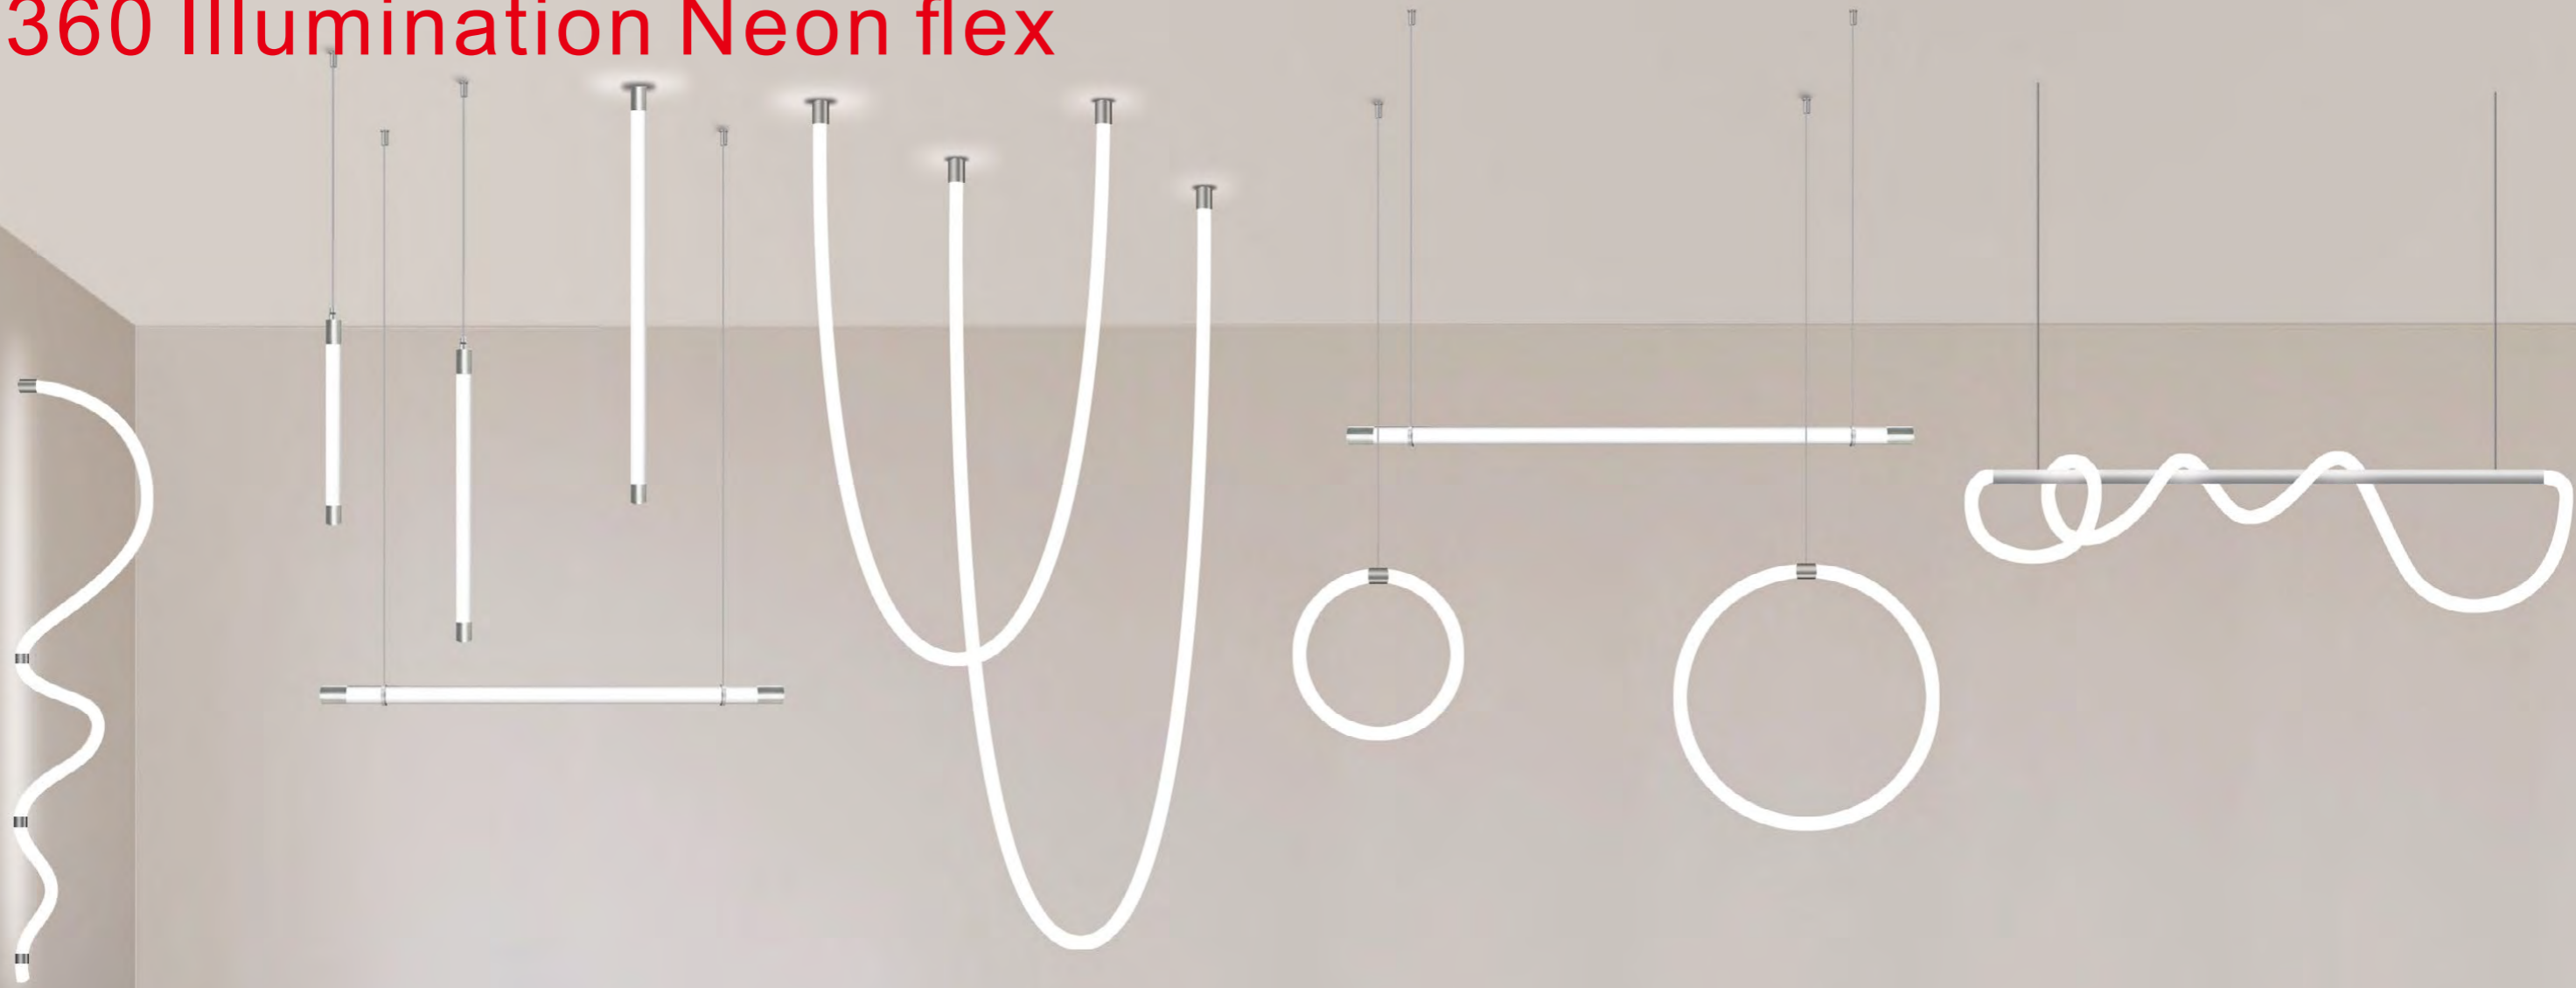


D18



24V DC 360 Illumination D18 mm Neon flex										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
N06W67-283527-024CV-120D-MY3-D18	24	14.4	120	480	40	2700	80/90	Not cuttable	120	
N06W67-283527-024CV-120D-MY3-D18	24	14.4	120	540	45	3000	80/90	Not cuttable	120	
N06W67-283527-024CV-120D-MY3-D18	24	14.4	120	660	55	4000	80/90	Not cuttable	120	
N06W67-283527-024CV-120D-MY3-D18	24	14.4	120	540	45	6000	80/90	Not cuttable	120	


\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

Optional Mounting

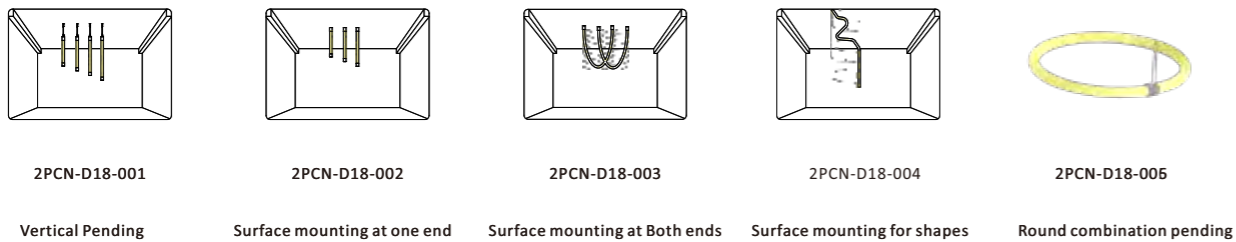

2PCN-D18-001 Vertical Pending  
2PCN-D18-002 Surface mounting at one end  
2PCN-D18-003 Surface mounting at Both ends  
2PCN-D18-004 Surface mounting for shapes  
2PCN-D18-005 Round combination pending


D23

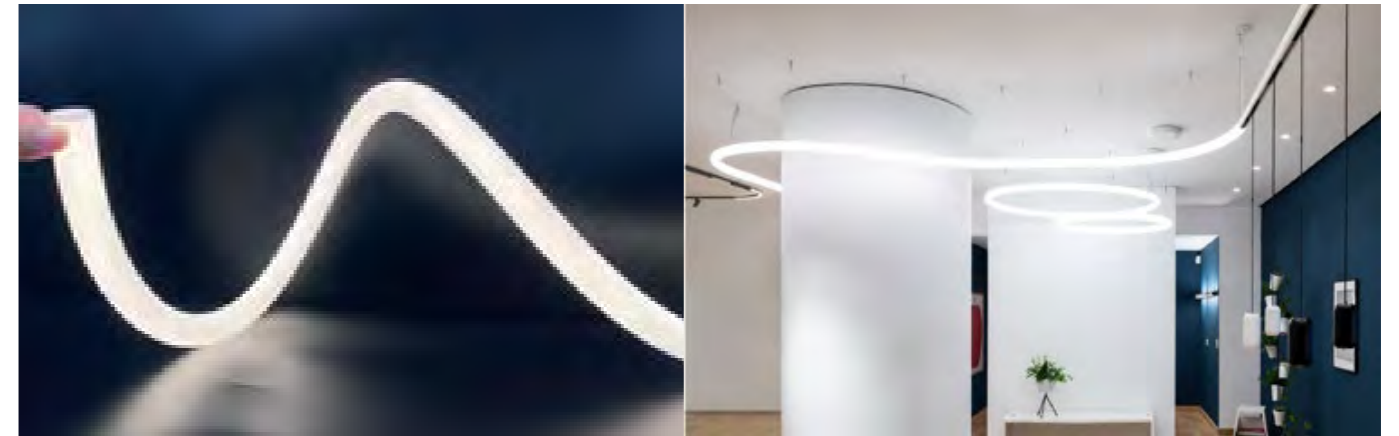


24V DC 360 Illumination D23 Neon flex										
Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)	
N08W67-283527-024CV-120D-MY3-D23	24	14	120	560	40	2700	80/90	Not cuttable	120	
N08W67-283527-024CV-120D-MY3-D23	24	14	120	630	45	3000	80/90	Not cuttable	120	
N08W67-283527-024CV-120D-MY3-D23	24	14	120	770	55	4000	80/90	Not cuttable	120	
N08W67-283527-024CV-120D-MY3-D23	24	14	120	630	45	6000	80/90	Not cuttable	120	

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

Optional Mounting

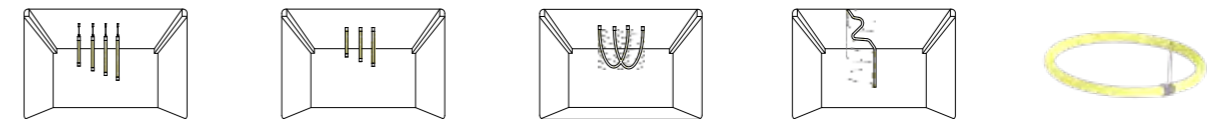

2PCN-D23-001 Vertical Pending  
2PCN-D23-002 Surface mounting at one end  
2PCN-D23-003 Surface mounting at Both ends  
2PCN-D23-004 Surface mounting for shapes  
2PCN-D23-005 Round combination pending

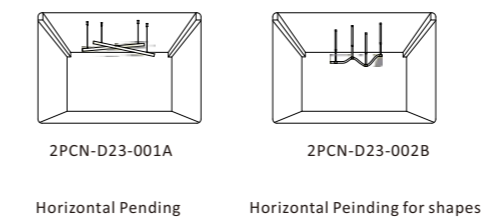

2PCN-D23-001A Horizontal Pending  
2PCN-D23-002B Horizontal Pending for shapes

D25




**24V DC 360 Illumination D25 Neon flex**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N08W67-283527-024CV-120D-MY3-D25	24	14.4	120	480	40	2700	80/90	Not cuttable	120
N08W67-283527-024CV-120D-MY3-D25	24	14.4	120	540	45	3000	80/90	Not cuttable	120
N08W67-283527-024CV-120D-MY3-D25	24	14.4	120	660	55	4000	80/90	Not cuttable	120
N08W67-283527-024CV-120D-MY3-D25	24	14.4	120	540	45	6000	80/90	Not cuttable	120


\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Mounting**

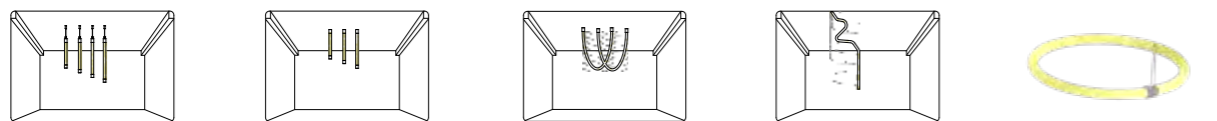

2PCN-D25-001      2PCN-D25-002      2PCN-D25-003      2PCN-D25-004      2PCN-D23-005



Vertical Pending      Surface mounting at one end      Surface mounting at Both ends      Surface mounting for shapes      Round combination pending

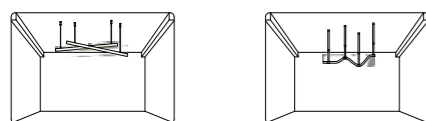

2PCN-D25-001A      2PCN-D25-002B

Horizontal Pending      Horizontal Pending for shapes

D40

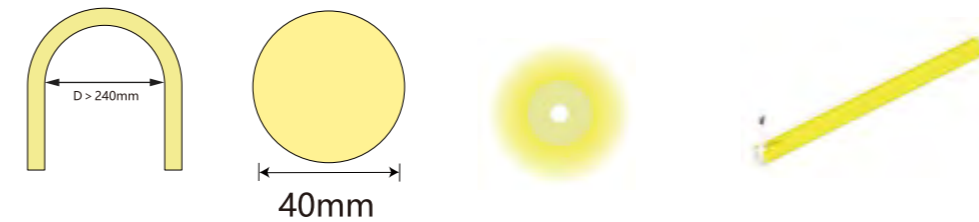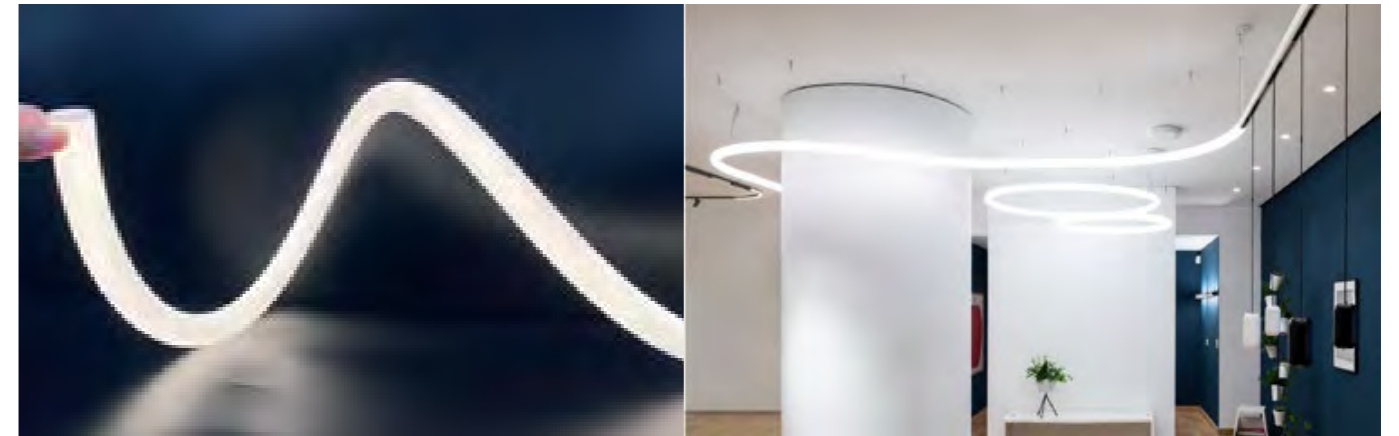


**24V DC 360 Illumination D40 Neon flex**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
N08W67-283527-024CV-120D-MY3-D40	24	14	120	560	40	2700	80/90	Not cuttable	120
N08W67-283527-024CV-120D-MY3-D40	24	14	120	630	45	3000	80/90	Not cuttable	120
N08W67-283527-024CV-120D-MY3-D40	24	14	120	770	55	4000	80/90	Not cuttable	120
N08W67-283527-024CV-120D-MY3-D40	24	14	120	630	45	6000	80/90	Not cuttable	120

\*The neon flex will come with 5 meters /reel  
\*Customization will be accepted, like voltage, power, and color.

**Optional Mounting**




2PCN-D40-001      2PCN-D40-002      2PCN-D40-001A

Vertical Pending      Surface mounting at one end      Horizontal Pending

## What is COB ?

COB is the abbreviation of the Chip On Board. It means to directly pack the chip on the circuit board. It is a kind of LED integrated package technology

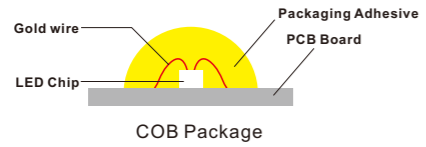

## What is COB LED Strip Light ?

The COB led strip is a high-density led lighting strip made by COB encapsulation, which can reduce the thermal resistance of the high-density strip circuit system, greatly improves the life of the LED, and the light flux density is high, the glare is small, and the light is uniform and there is no dark area.


## Why use COB strip light ?



Uniform lighting output, No Any dot

# COB LED Strip light



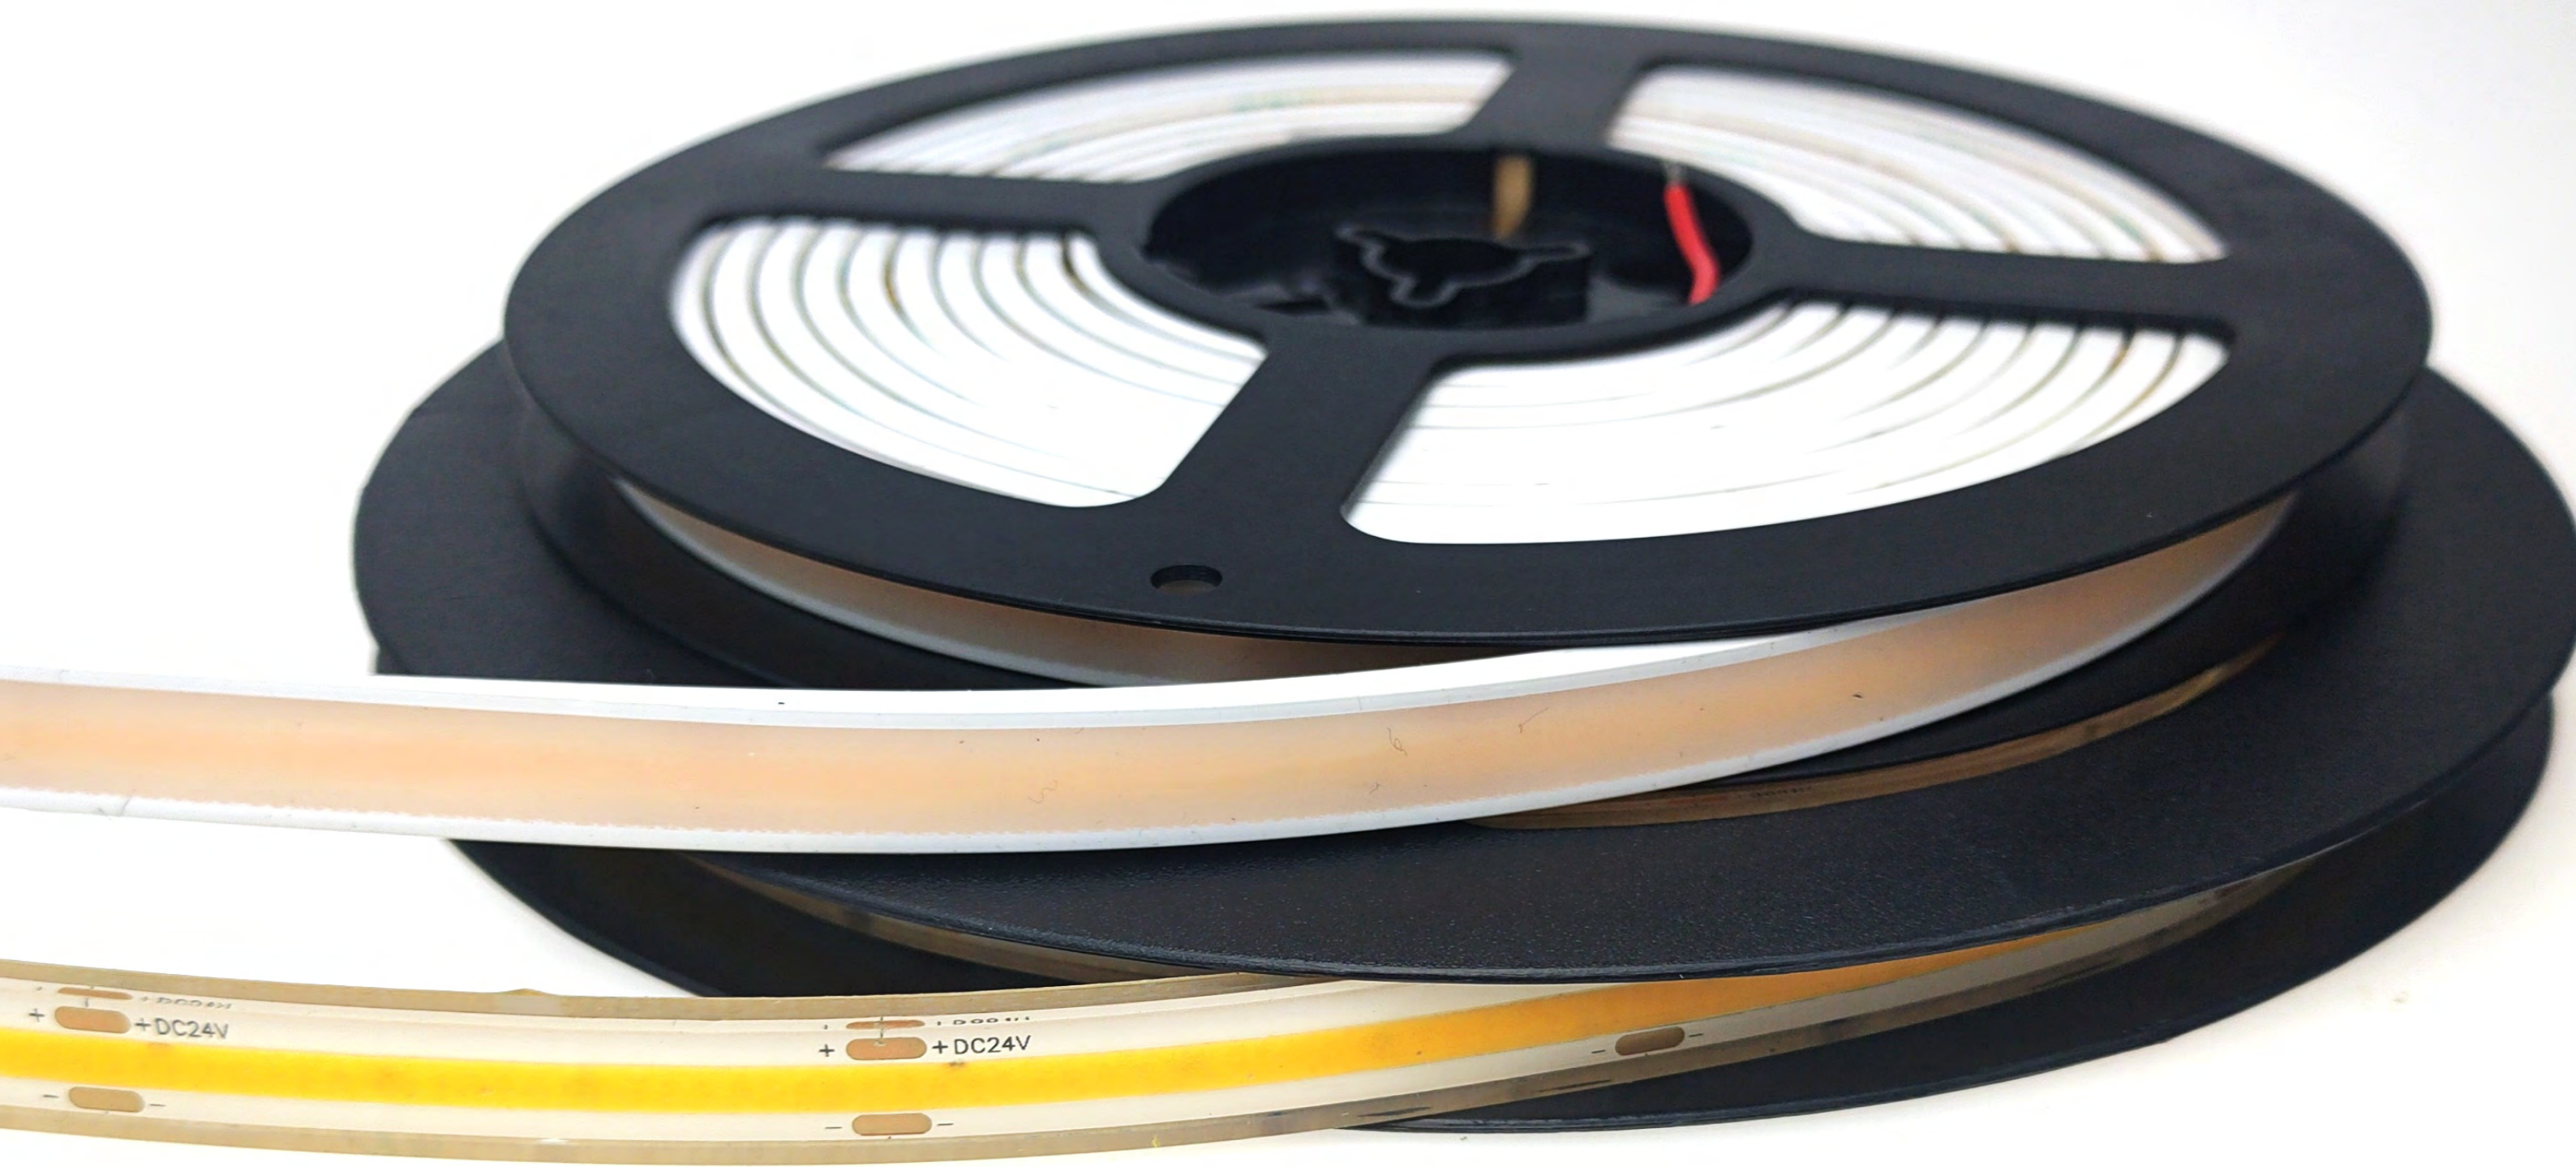

+DC24V



+DC24V

-

-

8 MM - 320 CHIPS/M


# Single color COB Strip light

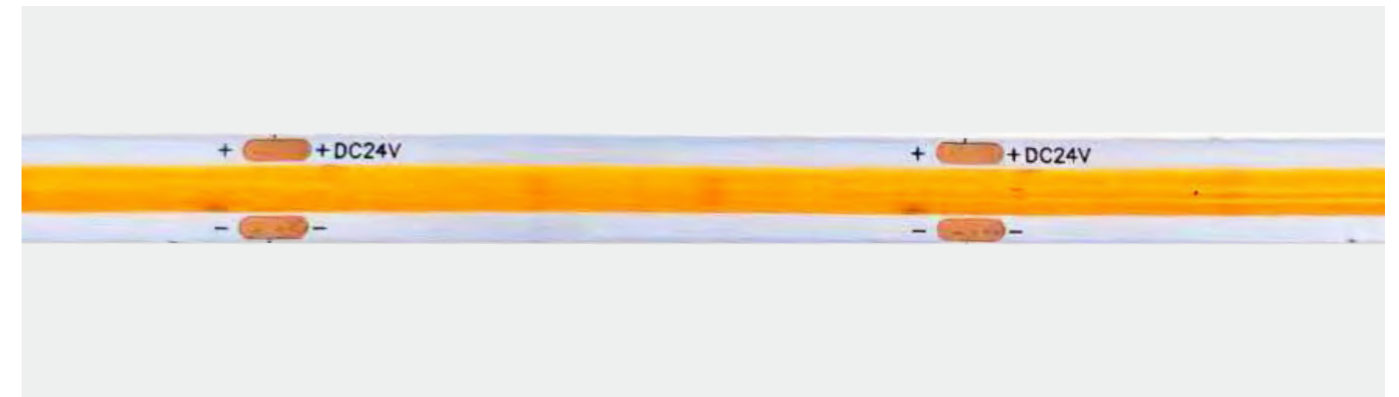

**12V DC** 8mm 320 Chip/M Single Color COB Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08W20-FCOB27-012CV-320S-MY3	12	8	320	720	90	2700	90	25	180
S08W20-FCOB30-012CV-320S-MY3	12	8	320	740	95	3000	90	25	180
S08W20-FCOB40-012CV-320S-MY3	12	8	320	800	100	4000	90	25	180
S08W20-FCOB60-012CV-320S-MY3	12	8	320	740	95	6000	90	25	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



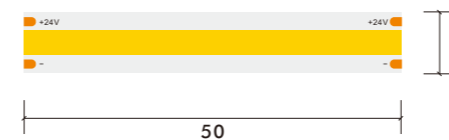


**24V DC** 8mm 320 Chip/M Single Color COB Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08W20-FCOB27-024CV-320S-MY3	24	8	320	720	90	2700	90	50	180
S08W20-FCOB30-024CV-320S-MY3	24	8	320	740	95	3000	90	50	180
S08W20-FCOB40-024CV-320S-MY3	24	8	320	800	100	4000	90	50	180
S08W20-FCOB60-024CV-320S-MY3	24	8	320	740	95	6000	90	50	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



8 MM - 480 Chips/M

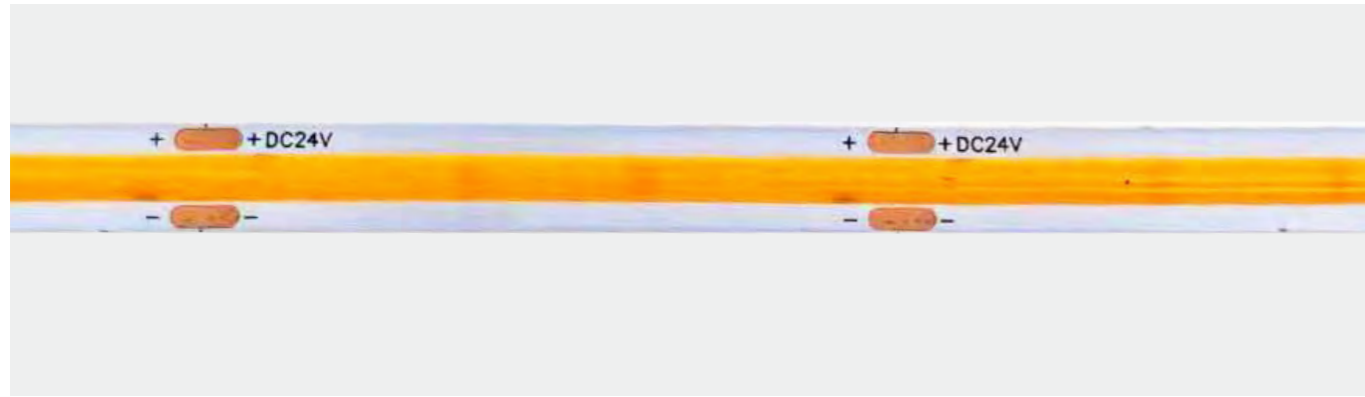

**12V DC 8mm 480 Chip/M Single Color COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10W20-FCOB27-012CV-480S-MY3	12	10	480	900	90	2700	90	25	180
S10W20-FCOB30-012CV-480S-MY3	12	10	480	950	95	3000	90	25	180
S10W20-FCOB40-012CV-480S-MY3	12	10	480	1000	100	4000	90	25	180
S10W20-FCOB60-012CV-480S-MY3	12	10	480	950	95	6000	90	25	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68





**24V DC 8mm 480 Chip/M Single Color COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08W20-FCOB27-024CV-320S-MY3	24	10	480	900	90	2700	90	50	120
S08W20-FCOB30-024CV-320S-MY3	24	10	480	950	95	3000	90	50	120
S08W20-FCOB40-024CV-320S-MY3	24	10	480	1000	100	4000	90	50	120
S08W20-FCOB60-024CV-320S-MY3	24	10	480	950	95	6000	90	50	120

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

8 / 10 MM - 528 Chips/M

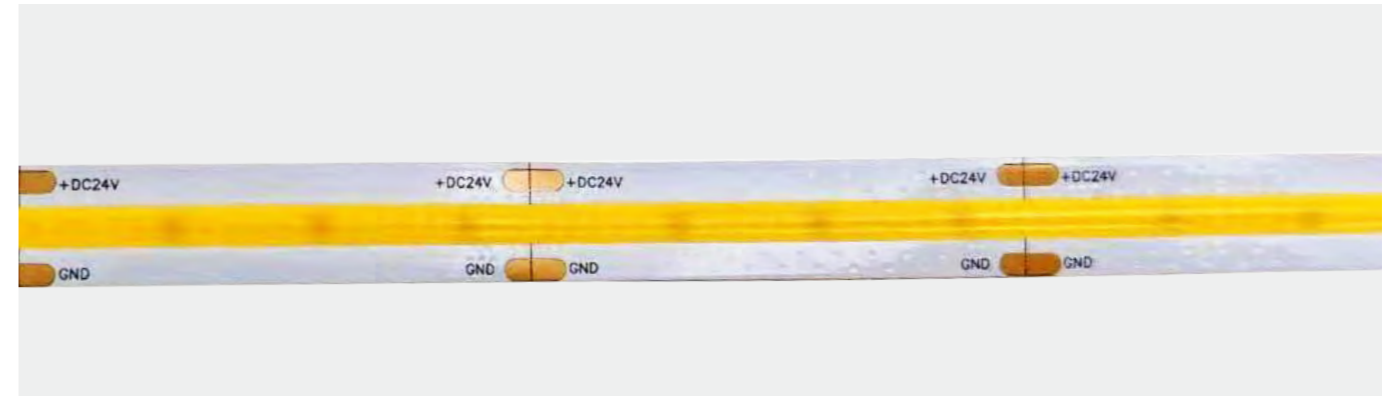

**24V DC 8mm 528 Chip/m Single Color COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08W20-FCOB27-024CV-528S-MY3	24	10	528	900	90	2700	90	45.45	180
S08W20-FCOB30-024CV-528S-MY3	24	10	528	950	95	3000	90	45.45	180
S08W20-FCOB40-024CV-528S-MY3	24	10	528	1000	100	4000	90	45.45	180
S08W20-FCOB60-024CV-528S-MY3	24	10	528	950	95	6000	90	45.45	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




**24V DC 10mm 528Chip/M Single Color COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10W20-FCOB27-024CV-528S-MY3	24	15	528	1450	90	2700	90	45.45	180
S10W20-FCOB30-024CV-528S-MY3	24	15	528	1475	95	3000	90	45.45	180
S10W20-FCOB40-024CV-528S-MY3	24	15	528	1500	100	4000	90	45.45	180
S10W20-FCOB60-024CV-528S-MY3	24	15	528	1475	95	6000	90	45.45	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

10 MM - 608 CCT Chips/M


# Tunable CCT COB Strip light



**12V DC 10mm 608 Chip/M CCT Color COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10W20-FCOBTW-012CV-608S-MY3	12	16	608	1880	90	CCT	90	13.15	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


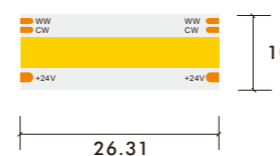


**24V DC 10mm 608Chip/M CCT Color COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10W20-FCOBTW-024CV-608S-MY3	24	16	608	1880	90	CCT	90	26.31	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



8 MM - 512 CCT Chips/M



24V DC	8mm 512 Chip/M CCT Color COB Strip	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
		S08W20-FCOBTW-024CV-512S-MY3	24	16	512	1500	90	CCT	90	50	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

10 MM - 640 CCT Chips/M

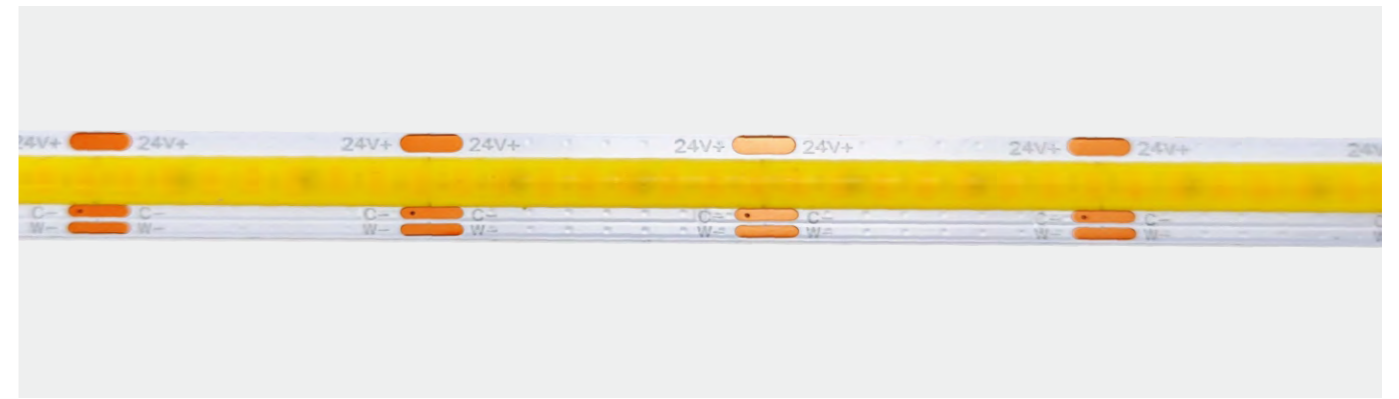



24V DC	10mm 640 Chip/m CCT Color COB Strip	Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
		S10W20-FCOBTW-024CV-640S-MY3	24	22	640	1880	90	CCT	90	50	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



10 MM - 450/480 RGB Chips/M


# RGB COB Strip light

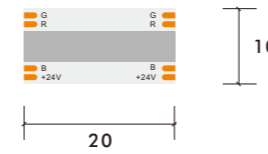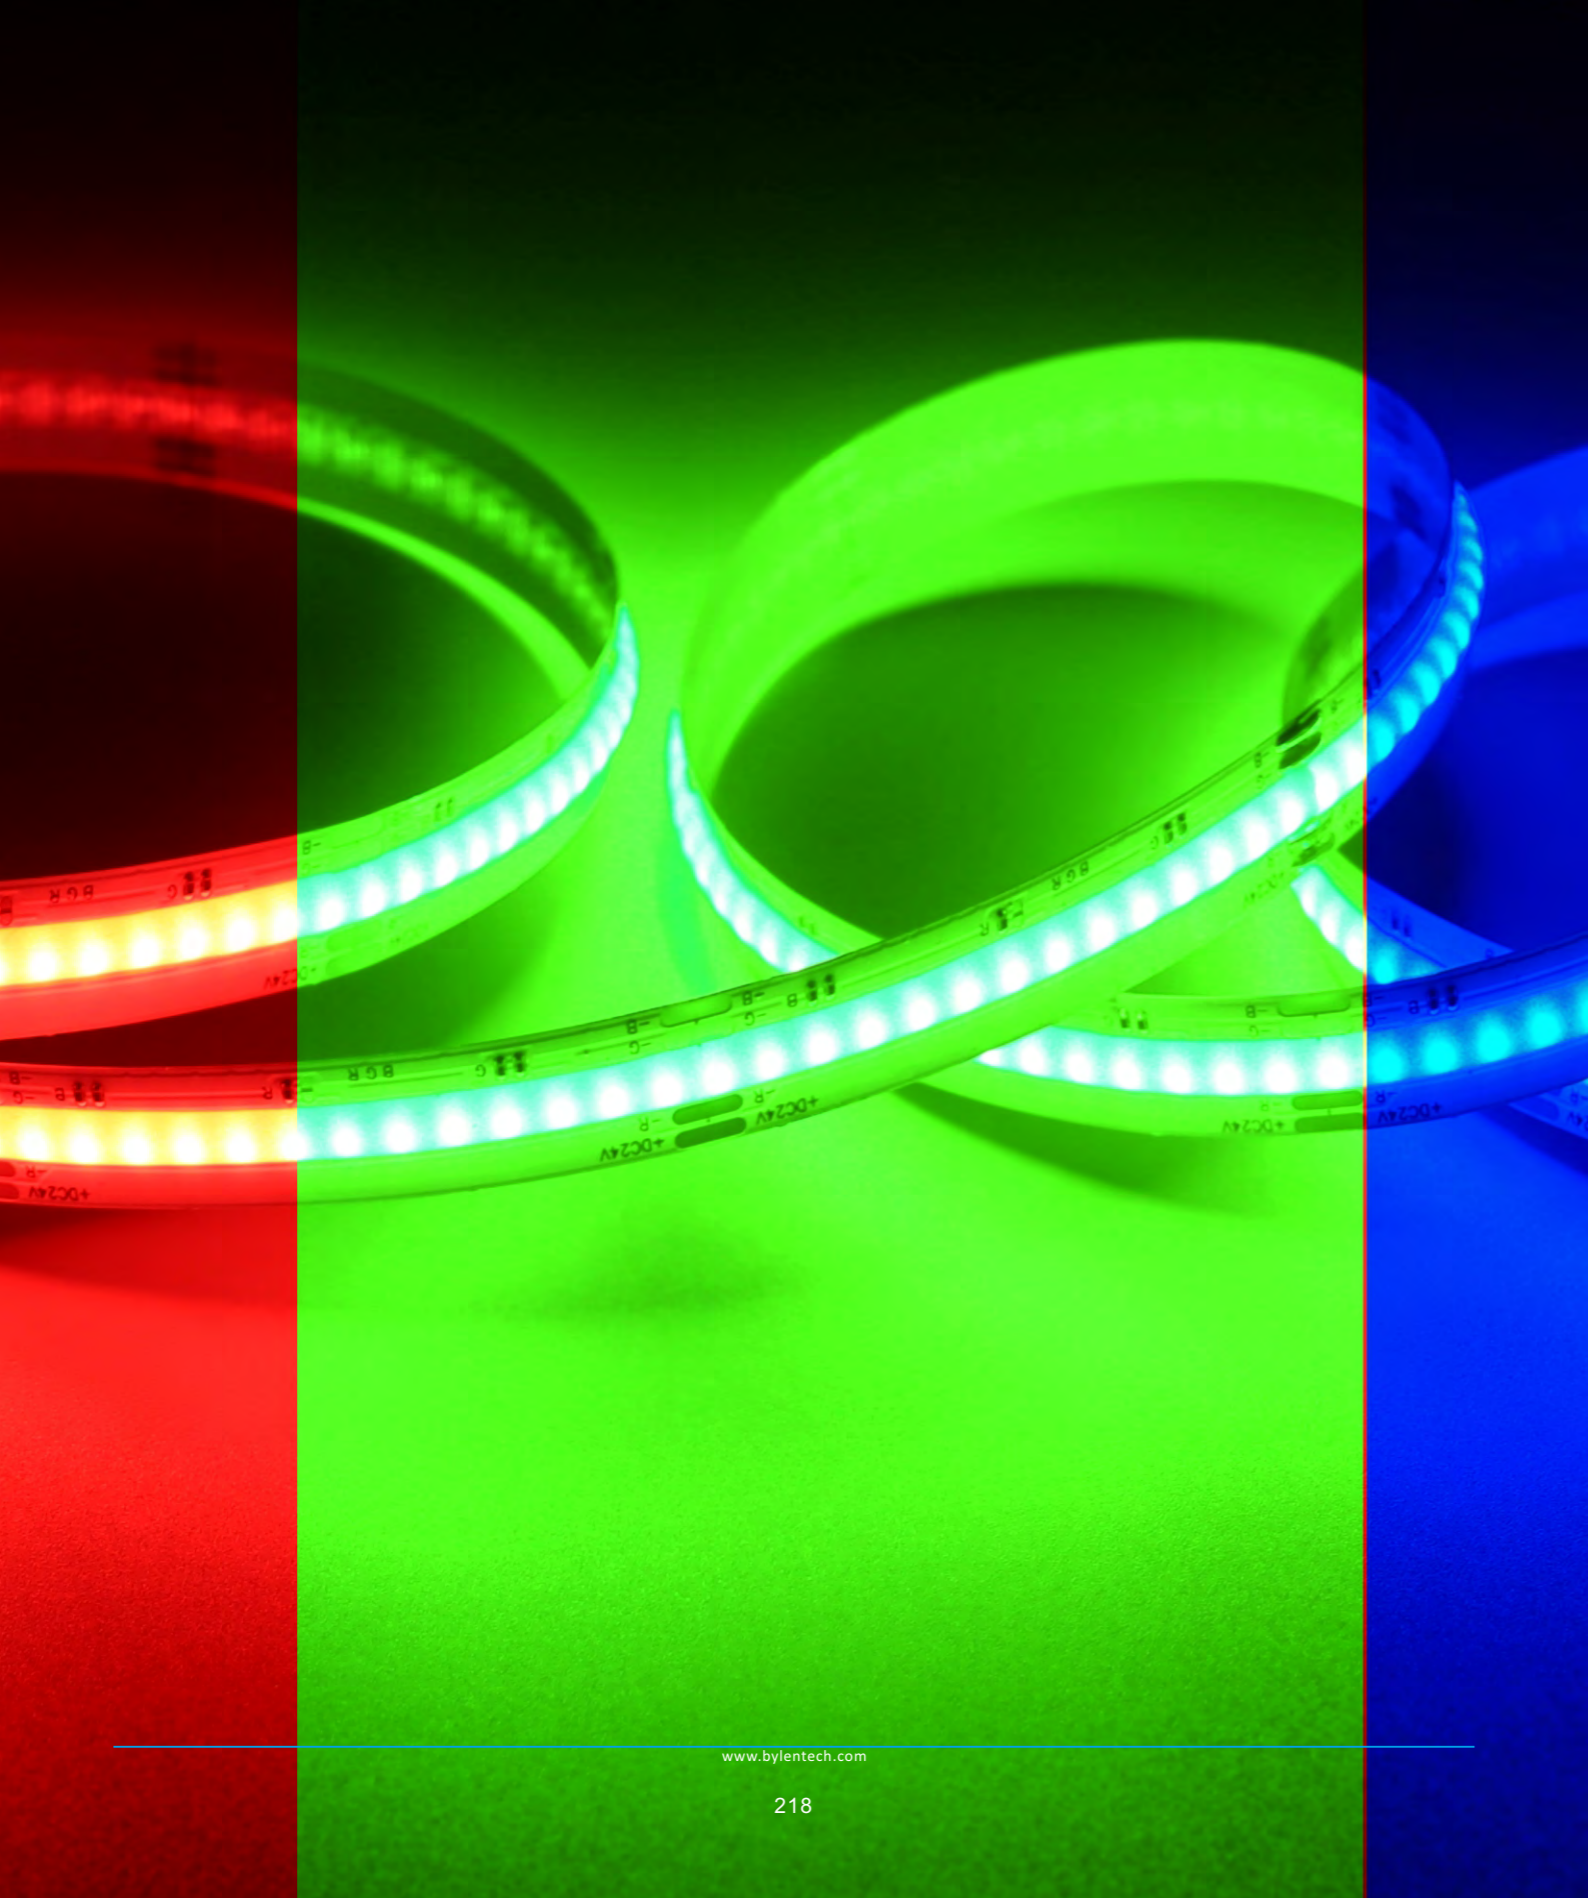

**12V DC 10mm 450 Chip/m RGB Color COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10W20-FCOBTc-012CV-450S-MY3	12	15	450	N/A	N/A	RGB	N/A	20	180



\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

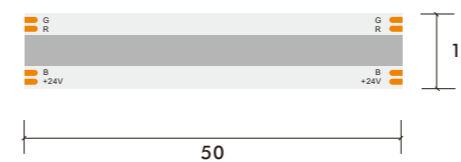

**24V DC 10mm 480Chip/M RGB Color COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10W20-FCOBTc-024CV-480S-MY3	24	15	480	N/A	N/A	RGB	N/A	50	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

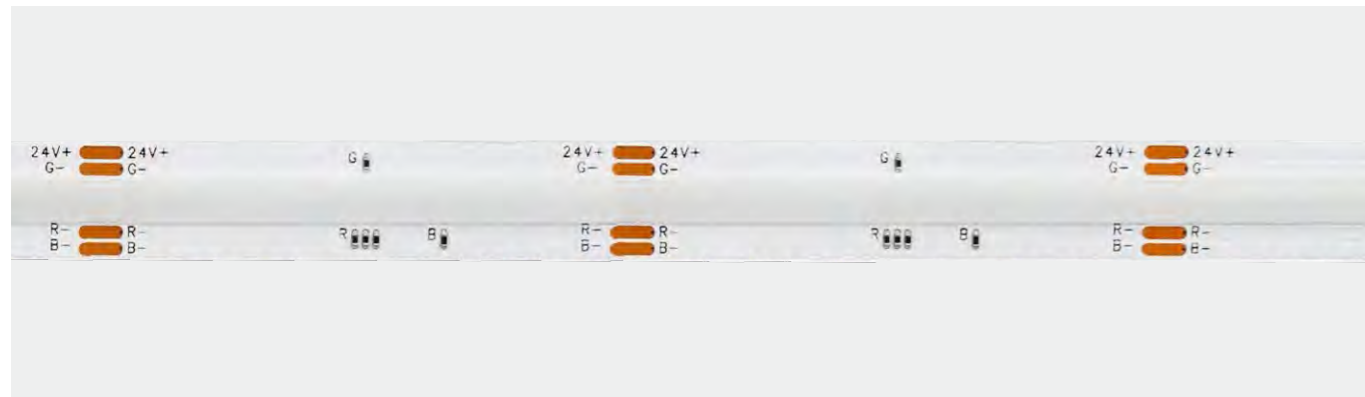


12V DC

10mm 810 Chip/M RGB Color COB Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10W20-FCOBTC-012CV-810S-MY3	12	15	810	N/A	N/A	RGB	N/A	11.5	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

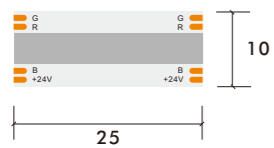


24V DC

10mm 840Chip/M RGB Color COB Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10W20-FCOBTC-024CV-840S-MY3	24	15	840	N/A	N/A	RGB	N/A	25	180


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

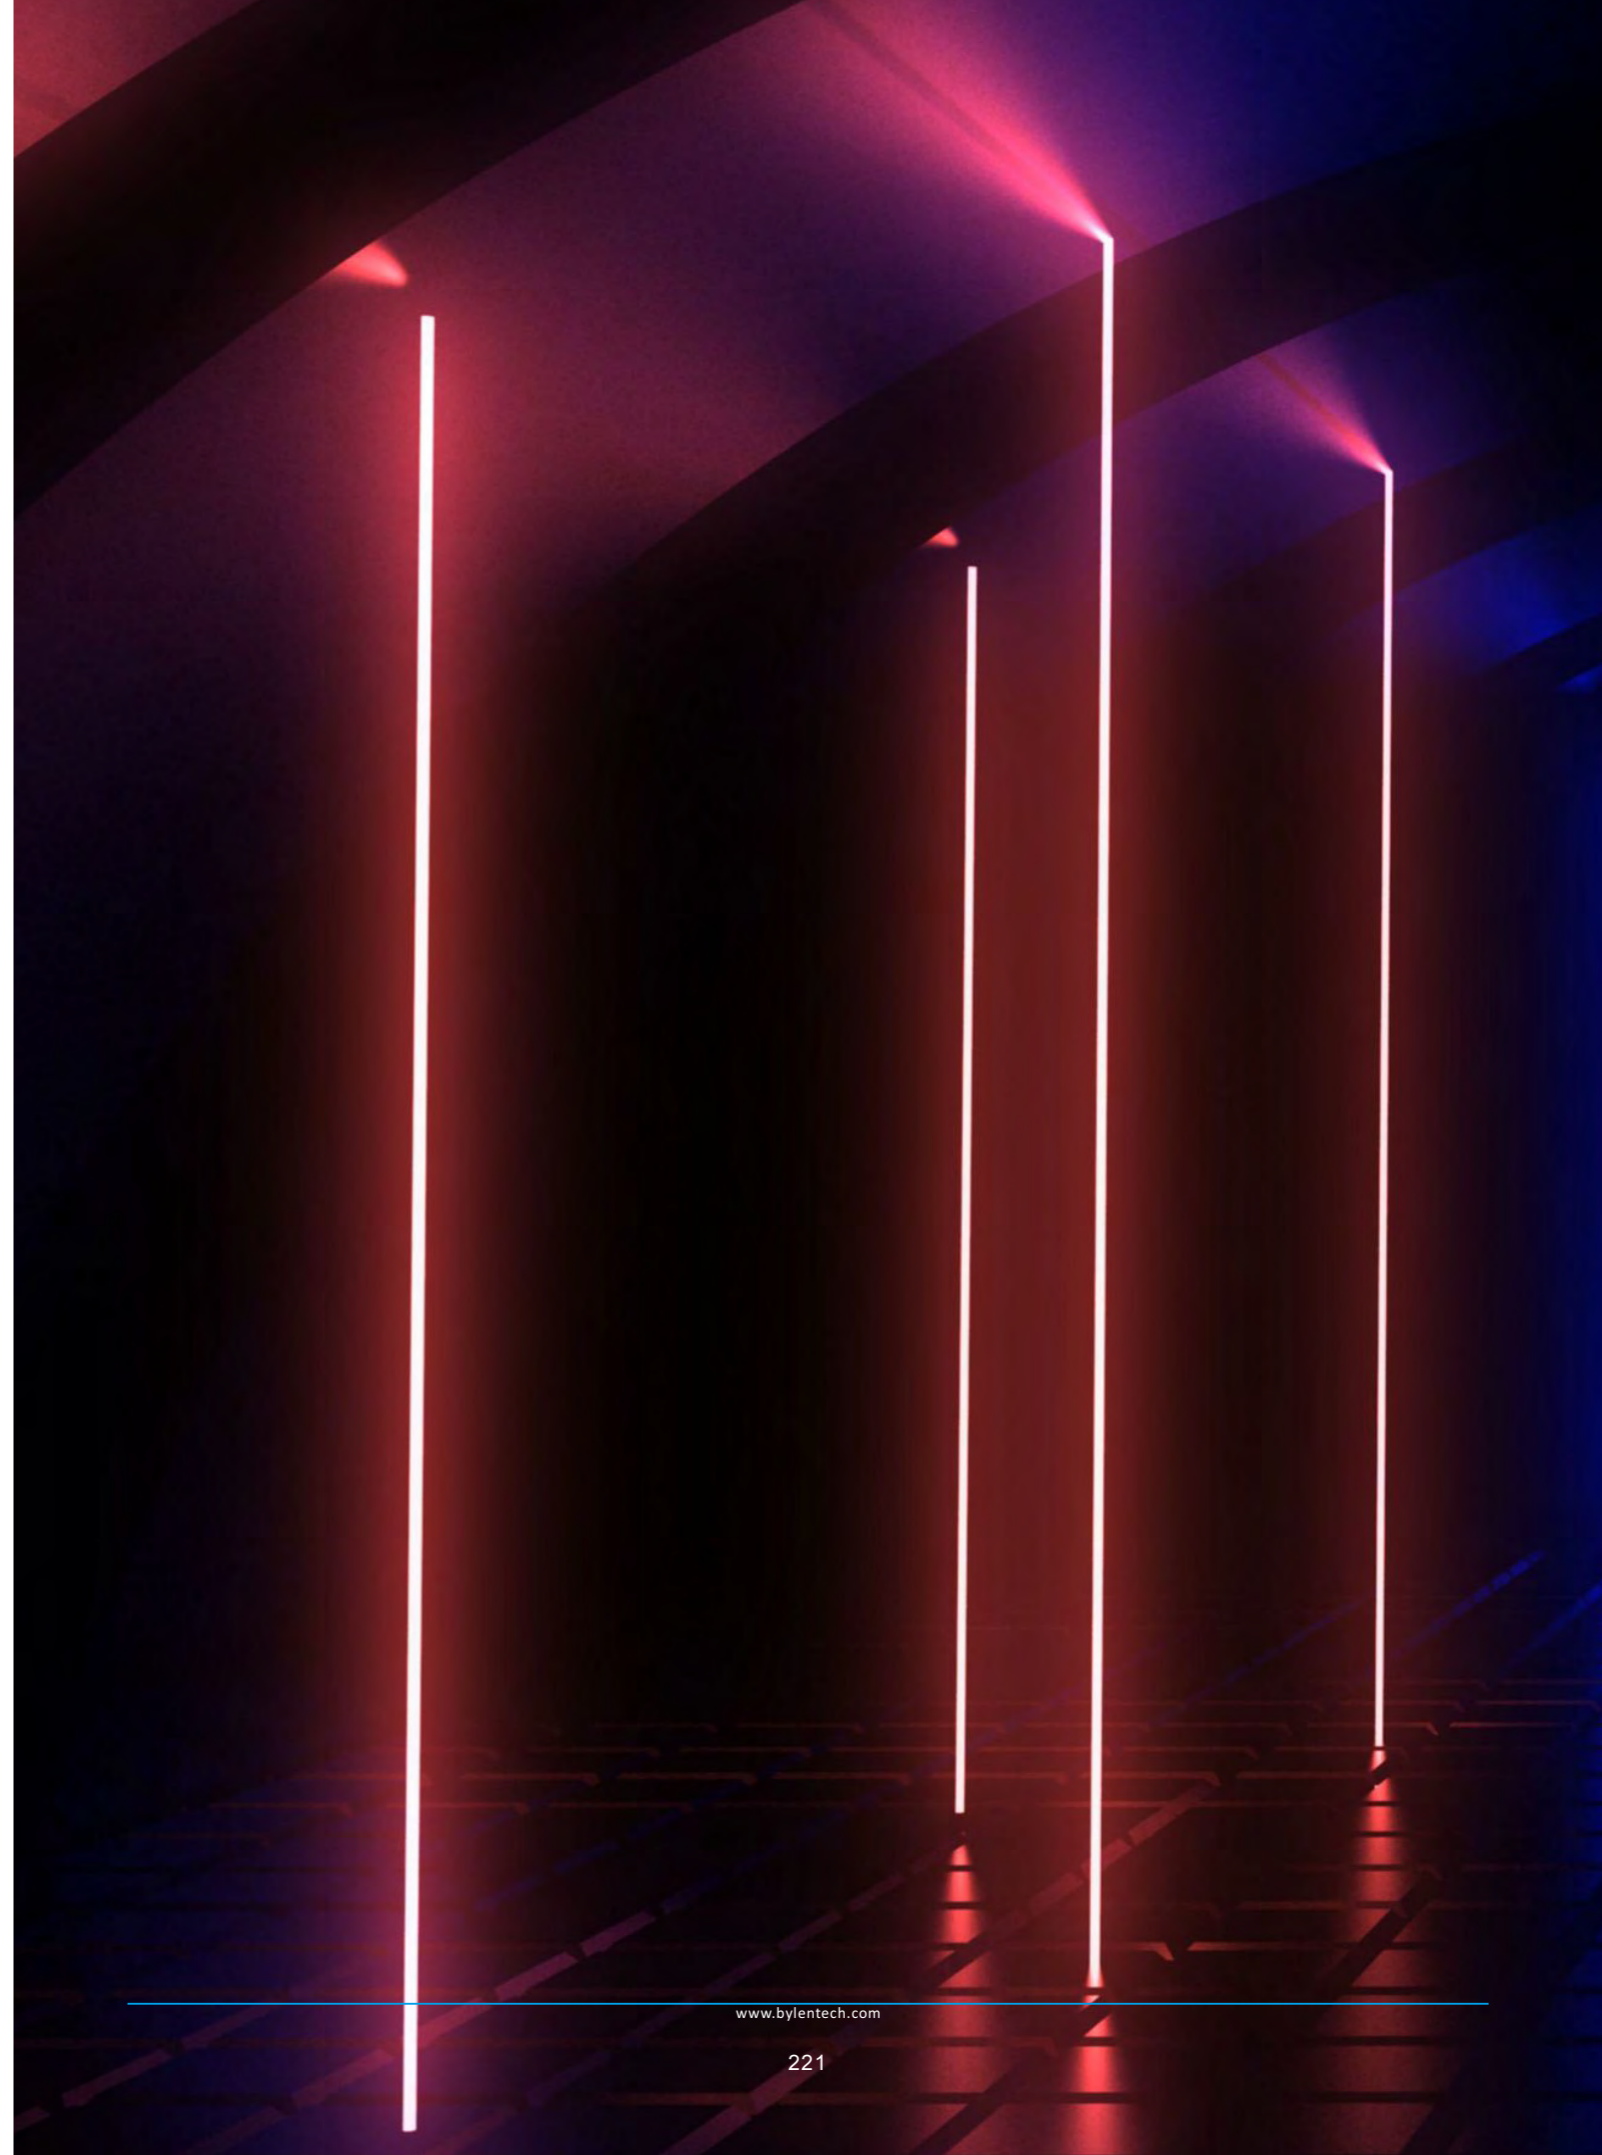



# RGBW COB Strip light

## 12 MM - 896 RGBW Chips/M

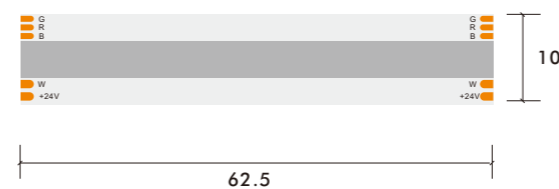

### 12V DC 12mm 896 Chip/m RGBW Color COB Strip


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12W20-FCOBMC-024CV-896S-MY3	24	16	896	N/A	N/A	RGBW	N/A	62.5	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



# RGB CCT COB Strip light

## 12 MM - 840 RGB CCT Chips/M

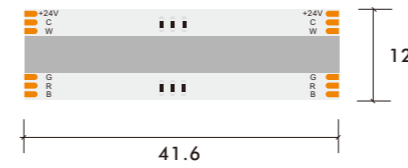

12V DC

### 12mm 840 Chip/m RGB CCT COB Strip Light


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12W20-FC0BFC-024CV-840S-MY3	24	25	840	N/A	N/A	RGB CCT	N/A	41.6	180

\*The strip light will come with 5 meters /reel

\*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

3 MM - 480 Chips/M


# Narrow PCB COB Strip light



**12V DC 3mm 480 Chip/M White Color Narrow PCB COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S03W20-FCOB27-012CV-480S-MY3	12	5	480	450	90	2700	90	25	180
S03W20-FCOB30-012CV-480S-MY3	12	5	480	470	95	3000	90	25	180
S03W20-FCOB40-012CV-480S-MY3	12	5	480	500	100	4000	90	25	180
S03W20-FCOB60-012CV-480S-MY3	12	5	480	470	95	6000	90	25	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

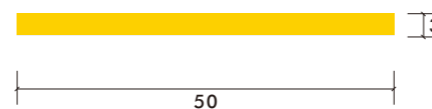


**24V DC 8mm 480 Chip/M White Color Narrow PCB COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S03W20-FCOB27-024CV-480S-MY3	24	5	480	450	90	2700	90	50	180
S03W20-FCOB30-024CV-480S-MY3	24	5	480	470	95	3000	90	50	180
S03W20-FCOB40-024CV-480S-MY3	24	5	480	500	100	4000	90	50	180
S03W20-FCOB60-024CV-480S-MY3	24	5	480	470	95	6000	90	50	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


4 MM - 480 Chips/M



**12V DC 4mm 480 Chip/M White Color Narrow PCB COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S04W20-FCOB27-012CV-480S-MY3	12	6	480	540	90	2700	90	25	180
S04W20-FCOB30-012CV-480S-MY3	12	6	480	570	95	3000	90	25	180
S04W20-FCOB40-012CV-480S-MY3	12	6	480	600	100	4000	90	25	180
S04W20-FCOB60-012CV-480S-MY3	12	6	480	570	95	6000	90	25	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

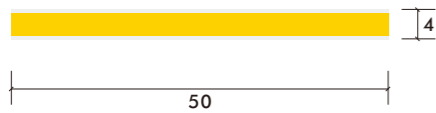


**24V DC 4mm 480 Chip/M White Color Narrow PCB COB Strip light**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S04W20-FCOB27-024CV-480S-MY3	24	6	480	540	90	2700	90	50	180
S04W20-FCOB30-024CV-480S-MY3	24	6	480	570	95	3000	90	50	180
S04W20-FCOB40-024CV-480S-MY3	24	6	480	600	100	4000	90	50	180
S04W20-FCOB60-024CV-480S-MY3	24	6	480	570	95	6000	90	50	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


5 MM - 480 Chips/M



**12V DC 5mm 480 Chip/M White Color Narrow PCB COB Strip light**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S05W20-FCOB27-012CV-480S-MY3	12	7	480	630	90	2700	90	25	180
S05W20-FCOB30-012CV-480S-MY3	12	7	480	665	95	3000	90	25	180
S05W20-FCOB40-012CV-480S-MY3	12	7	480	700	100	4000	90	25	180
S05W20-FCOB60-012CV-480S-MY3	12	7	480	665	95	6000	90	25	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




**24V DC 5mm 480 Chip/M White Color Narrow PCB COB Strip light**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S05W20-FCOB27-024CV-480S-MY3	24	7	480	630	90	2700	90	50	180
S05W20-FCOB30-024CV-480S-MY3	24	7	480	665	95	3000	90	50	180
S05W20-FCOB40-024CV-480S-MY3	24	7	480	700	100	4000	90	50	180
S05W20-FCOB60-024CV-480S-MY3	24	7	480	665	95	6000	90	50	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

5V - 4 / 8 MM - 480 Chips/M


# Mini Cut COB Strip light



**5V DC 4mm 480 Chip/M White Color Mini Cut COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S04W20-FCOB27-005CV-480S-MY3-MC	5	5	480	450	90	2700	90	12.5	180
S04W20-FCOB30-005CV-480S-MY3-MC	5	5	480	470	95	3000	90	12.5	180
S04W20-FCOB40-005CV-480S-MY3-MC	5	5	480	500	100	4000	90	12.5	180
S04W20-FCOB60-005CV-480S-MY3-MC	5	5	480	470	95	6000	90	12.5	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




**5V DC 8mm 480 Chip/M White Color COB Mini Cut Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08W20-FCOB27-005CV-480S-MY3-MC	5	5	480	450	90	2700	90	50	180
S08W20-FCOB30-005CV-480S-MY3-MC	5	5	480	470	95	3000	90	50	180
S08W20-FCOB40-005CV-480S-MY3-MC	5	5	480	500	100	4000	90	50	180
S08W20-FCOB60-005CV-480S-MY3-MC	5	5	480	470	95	6000	90	50	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


8 MM - 480 Chips/M

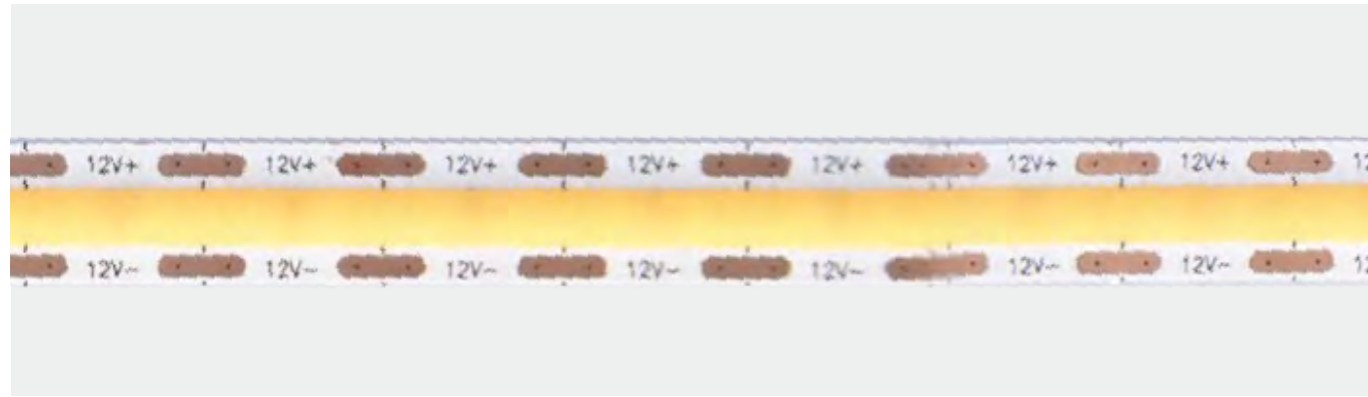

**12V DC 8mm 480 Chip/M White Color Mini Cut COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08W20-FCOB27-012CV-480S-MY3-MC	12	9	480	810	90	2700	90	8.33	180
S08W20-FCOB30-012CV-480S-MY3-MC	12	9	480	855	95	3000	90	8.33	180
S08W20-FCOB40-012CV-480S-MY3-MC	12	9	480	900	100	4000	90	8.33	180
S08W20-FCOB60-012CV-480S-MY3-MC	12	9	480	855	95	6000	90	8.33	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68




**24V DC 8mm 480 Chip/M White Color Mini Cut COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08W20-FCOB27-024CV-480S-MY3-MC	24	9	480	810	90	2700	90	8.33	180
S08W20-FCOB30-024CV-480S-MY3-MC	24	9	480	855	95	3000	90	8.33	180
S08W20-FCOB40-024CV-480S-MY3-MC	24	9	480	900	100	4000	90	8.33	180
S08W20-FCOB60-024CV-480S-MY3-MC	24	9	480	855	95	6000	90	8.33	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


8 MM - 512 Chips/M

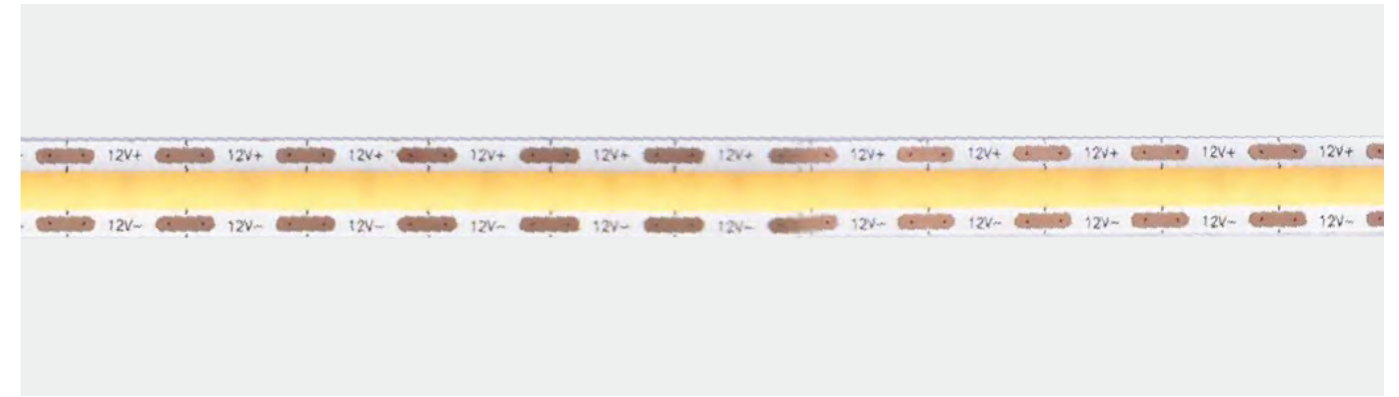

**12V DC 8mm 512 Chip/M White Color Mini Cut COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08W20-FCOB27-012CV-512S-MY3-MC	12	9	512	810	90	2700	90	7.8	180
S08W20-FCOB30-012CV-512S-MY3-MC	12	9	512	855	95	3000	90	7.8	180
S08W20-FCOB40-012CV-512S-MY3-MC	12	9	512	900	100	4000	90	7.8	180
S08W20-FCOB60-012CV-512S-MY3-MC	12	9	512	855	95	6000	90	7.8	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



**24V DC 8mm 512 Chip/M White Color Mini Cut COB Strip**


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08W20-FCOB27-024CV-512S-MY3-MC	24	9	512	810	90	2700	90	15.62	180
S08W20-FCOB30-024CV-512S-MY3-MC	24	9	512	855	95	3000	90	15.62	180
S08W20-FCOB40-024CV-512S-MY3-MC	24	9	512	900	100	4000	90	15.62	180
S08W20-FCOB60-024CV-512S-MY3-MC	24	9	512	855	95	6000	90	15.62	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

# Digital COB Strip light




## 10 MM 720 Chips/M RGB DIGITAL

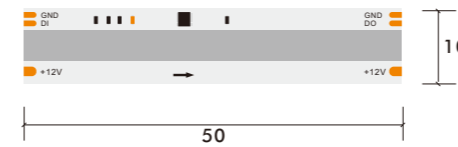

### 12V DC 10mm 720 Chip/M RGB Color COB Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10W20-FCOBTC-012AD-720S-MY3-WS2811	12	23	720	N/A	90	RGBIC	90	50	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

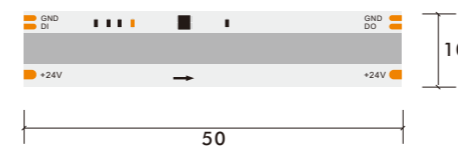


### 24V DC 10mm 720 Chip/M RGB Color COB Digital Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10W20-FCOBTC-024AD-720S-MY3-WS2811	24	23	720	N/A	90	RGBIC	N/A	50	180


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

12 MM - 720 Chips/M RGB DIGITAL

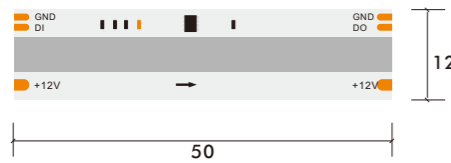

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12W20-FCOBTC-012AD-720S-MY3-WS2811	12	23	720	N/A	90	RGBIC	90	50	180



\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

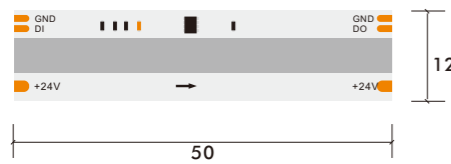

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12W20-FCOBTC-024AD-720S-MY3-WS2811	24	23	720	N/A	90	RGBIC	N/A	50	180


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

12 MM RGBW DIGITAL

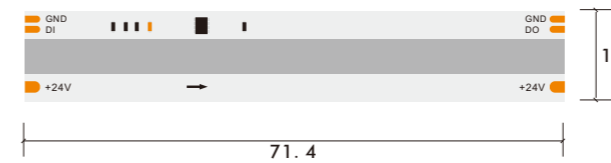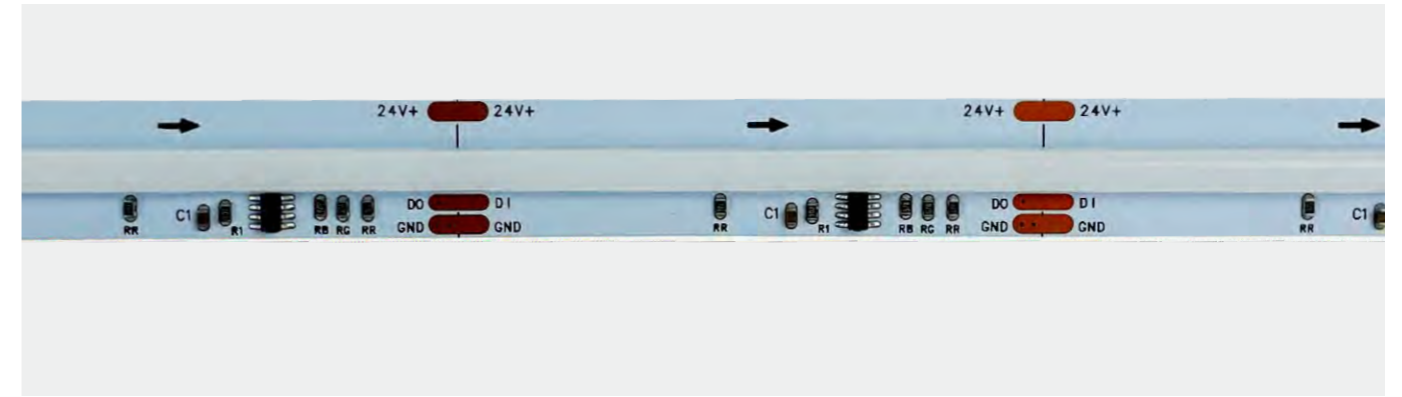

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12W20-FCOBMC-024AD-784S-MY3-WS2814	24	21	784	N/A	90	RGBWIC	90	71.43	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

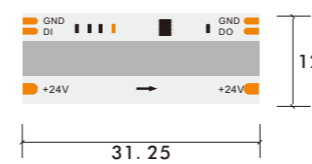


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12W20-FCOBTC-024AD-840S-MY3-WS2814	24	48	840	N/A	90	RGBWIC	N/A	31.25	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

# HIGH EFFICACY COB Strip light




## 8 MM - 480 Chips/M

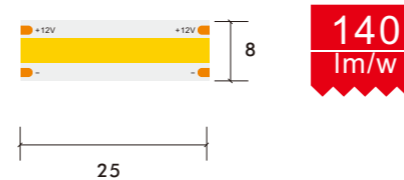

### 12V DC 8mm 480 Chip/M White Color High Efficacy COB Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08W20-FCOB27-012CV-480S-MY3-HF	12	9	480	1080	120	2700	90	25	180
S08W20-FCOB30-012CV-480S-MY3-HF	12	9	480	1170	130	3000	90	25	180
S08W20-FCOB40-012CV-480S-MY3-HF	12	9	480	1260	140	4000	90	25	180
S08W20-FCOB60-012CV-480S-MY3-HF	12	9	480	1170	130	6000	90	25	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


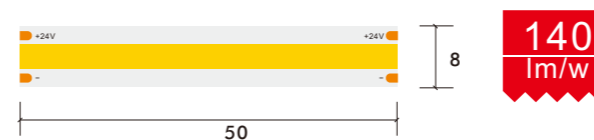


### 24V DC 8mm 480 Chip/M White Color High Efficacy COB Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S08W20-FCOB27-024CV-480S-MY3-HF	24	9	480	1080	120	2700	90	50	180
S08W20-FCOB30-024CV-480S-MY3-HF	24	9	480	1170	130	3000	90	50	180
S08W20-FCOB40-024CV-480S-MY3-HF	24	9	480	1260	140	4000	90	50	180
S08W20-FCOB60-024CV-480S-MY3-HF	24	9	480	1170	130	6000	90	50	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


10 MM - 480 Chips/M

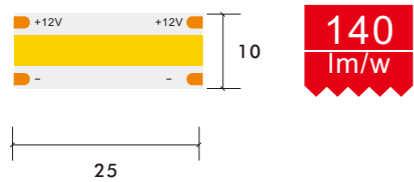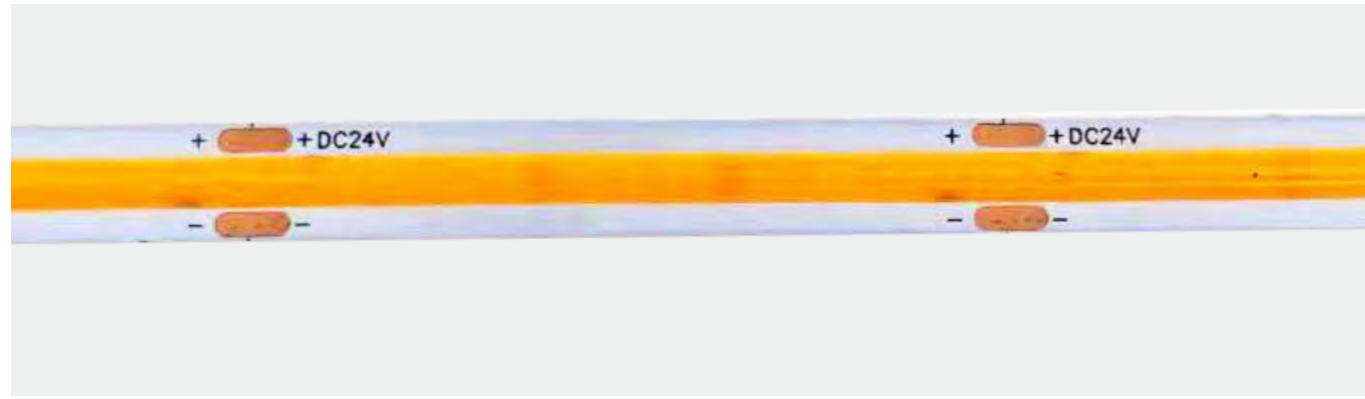

**12V DC 10mm 480 Chip/M White Color High Efficacy COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10W20-FCOB27-012CV-480S-MY3-HF	12	12	480	1440	120	2700	90	25	180
S10W20-FCOB30-012CV-480S-MY3-HF	12	12	480	1560	130	3000	90	25	180
S10W20-FCOB40-012CV-480S-MY3-HF	12	12	480	1680	140	4000	90	25	180
S10W20-FCOB60-012CV-480S-MY3-HF	12	12	480	1560	130	6000	90	25	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

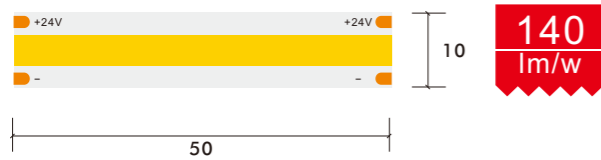

**24V DC 10mm 480 Chip/M White Color High Efficacy COB Strip**


Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10W20-FCOB27-024CV-480S-MY3-HF	24	12	480	1440	120	2700	90	50	180
S10W20-FCOB30-024CV-480S-MY3-HF	24	12	480	1560	130	3000	90	50	180
S10W20-FCOB40-024CV-480S-MY3-HF	24	12	480	1680	140	4000	90	50	180
S10W20-FCOB60-024CV-480S-MY3-HF	24	12	480	1560	130	6000	90	50	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68



# LONG RUN COB Strip light


10 MM - 480Chips/M

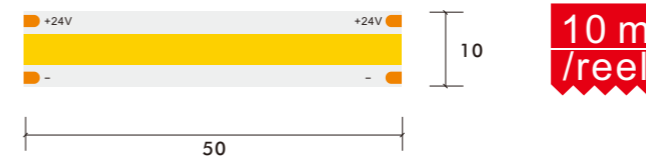

**24V DC 10mm 480 Chip/M White Color 10M Long Run COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10W20-FCOB27-024CC-480S-MY3-L10	24	10	480	800	80	2700	90	50	180
S10W20-FCOB30-024CC-480S-MY3-L10	24	10	480	850	85	3000	90	50	180
S10W20-FCOB40-024CC-480S-MY3-L10	24	10	480	900	90	4000	90	50	180
S10W20-FCOB60-024CC-480S-MY3-L10	24	10	480	850	85	6000	90	50	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

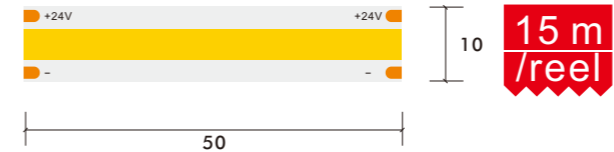


**24V DC 10mm 480 Chip/M White Color 15M Long Run COB Strip**

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Bean Angle (o)
S10W20-FCOB27-024CC-480S-MY3-L15	24	10	480	800	80	2700	90	50	180
S10W20-FCOB30-024CC-480S-MY3-L15	24	10	480	850	85	3000	90	50	180
S10W20-FCOB40-024CC-480S-MY3-L15	24	10	480	900	90	4000	90	50	180
S10W20-FCOB60-024CC-480S-MY3-L15	24	10	480	850	85	6000	90	50	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

10 MM - 480 Chips/M


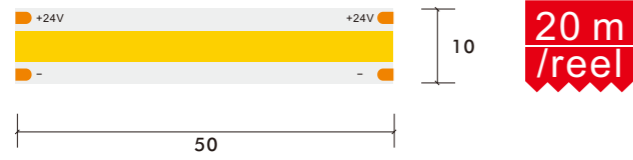


**24V DC** 10mm 480 Chip/M White Color 20M Long Run COB Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10W20-FCOB27-024CC-480S-MY3-L20	24	10	480	800	80	2700	90	50	180
S10W20-FCOB30-024CC-480S-MY3-L20	24	10	480	850	85	3000	90	50	180
S10W20-FCOB40-024CC-480S-MY3-L20	24	10	480	900	90	4000	90	50	180
S10W20-FCOB60-024CC-480S-MY3-L20	24	10	480	850	85	6000	90	50	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68


48V 10 MM - 480Chips/M

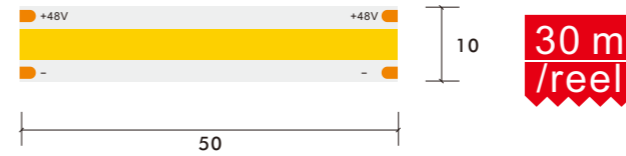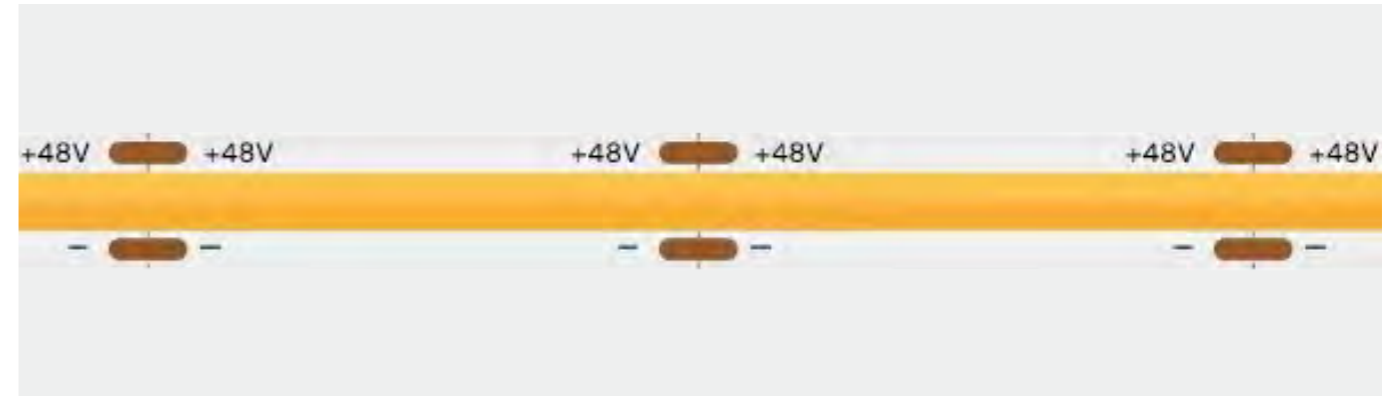

**48V DC** 10mm 480 Chip/M White Color 48V 30M Long Run COB Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S10W20-FCOB27-048CV-480S-MY3-L30	48	10	480	800	80	2700	90	50	180
S10W20-FCOB30-048CV-480S-MY3-L30	48	10	480	850	85	3000	90	50	180
S10W20-FCOB40-048CV-480S-MY3-L30	48	10	480	900	90	4000	90	50	180
S10W20-FCOB60-048CV-480S-MY3-L30	48	10	480	850	85	6000	90	50	180


\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

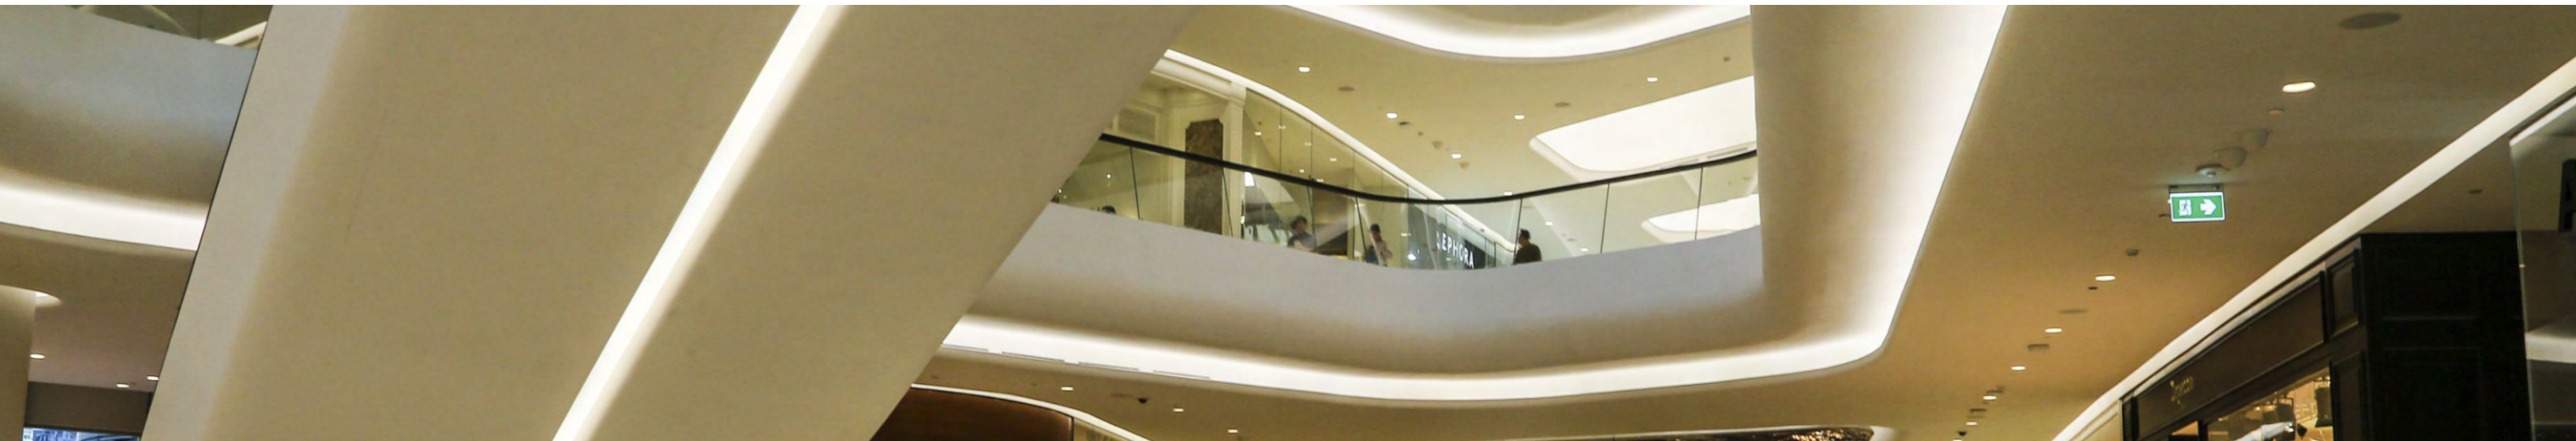

# Multiple Rows COB Strip light




12 MM - 600 /900 Chips/M



## 24V DC 12mm 600 Chip/M White Color Multiple Rows COB Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12W20-FCOB27-024CV-600D-MY3	24	24	600	2160	90	2700	90	20	180
S12W20-FCOB30-024CV-600D-MY3	24	24	600	2280	95	3000	90	20	180
S12W20-FCOB40-024CV-600D-MY3	24	24	600	2400	100	4000	90	20	180
S12W20-FCOB60-024CV-600D-MY3	24	24	600	2280	95	6000	90	20	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

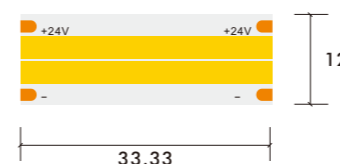


## 24V DC 12mm 900 Chip/M White Color Multiple Rows COB Strip

Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S12W20-FCOB30-024CV-900D-MY3	24	28	900	800	85	2700	90	33.33	180
S12W20-FCOB30-024CV-900D-MY3	24	28	900	850	90	3000	90	33.33	180
S12W20-FCOB30-024CV-900D-MY3	24	28	900	900	95	4000	90	33.33	180
S12W20-FCOB30-024CV-900D-MY3	24	28	900	850	90	6000	90	33.33	180

\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68

30 MM - 1600 Chips/M

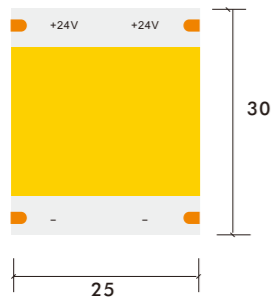


**24V DC 30mm 1600 Chip/M White Color Multiple Rows COB Strip**













Model Number	Voltage (dc v)	Power (w)	LED Qty (pcs)	Lumens (lm/m)	Efficacy (lm/W)	CCT&Color (K)	CRI	Cutting unit (mm)	Beam Angle (o)
S30W20-FCOB27-024CV-16005-MY3	24	40	1600	3600	90	2700	90	25	180
S30W20-FCOB30-024CV-16005-MY3	24	40	1600	3800	95	3000	90	25	180
S30W20-FCOB40-024CV-16005-MY3	24	40	1600	4000	100	4000	90	25	180
S30W20-FCOB60-024CV-16005-MY3	24	40	1600	3800	95	6000	90	25	180



\*The strip light will come with 5 meters /reel  
 \*All the data above is just for reference under IP20. it is different with IP65, IP66, IP67, IP68















# ALUMINUM PROFILE

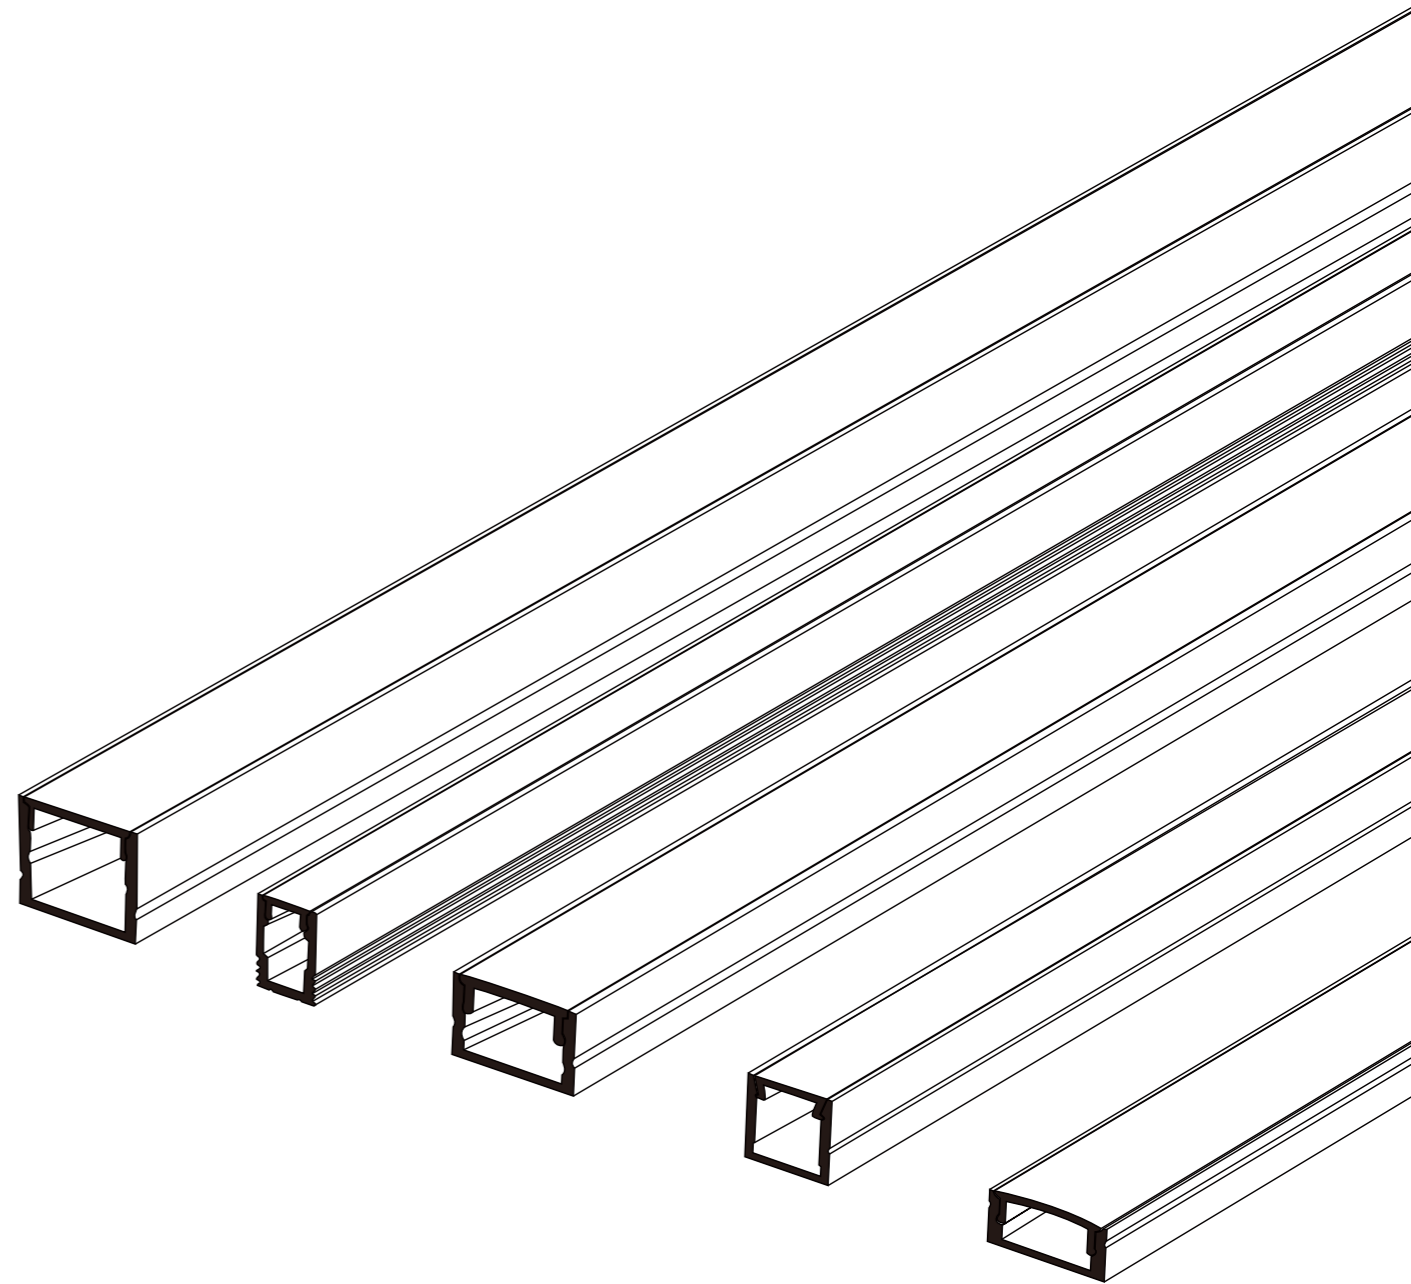

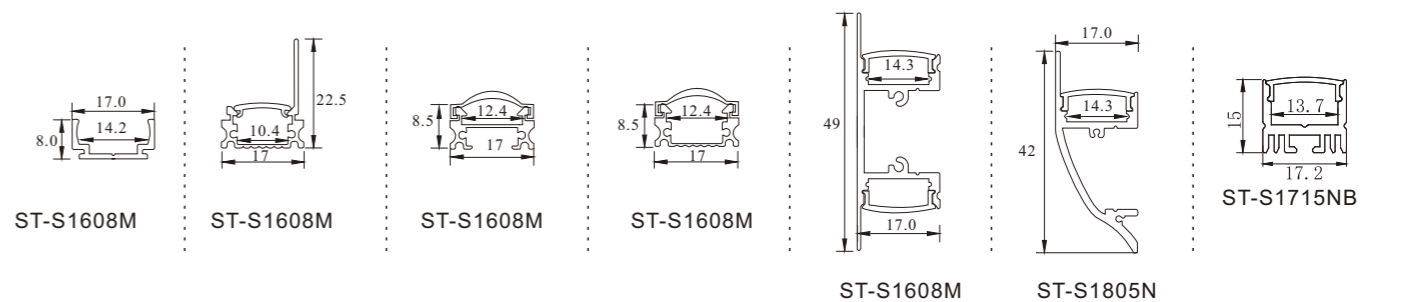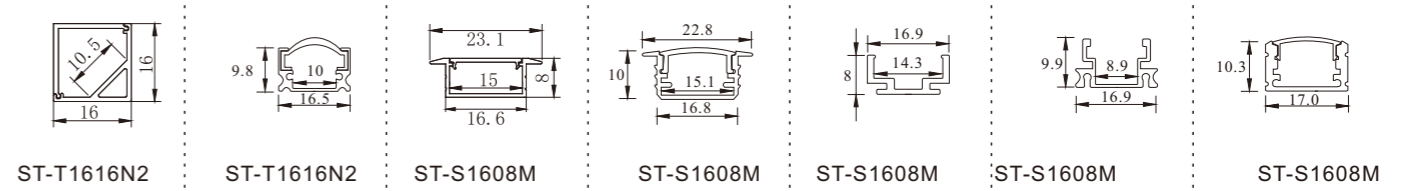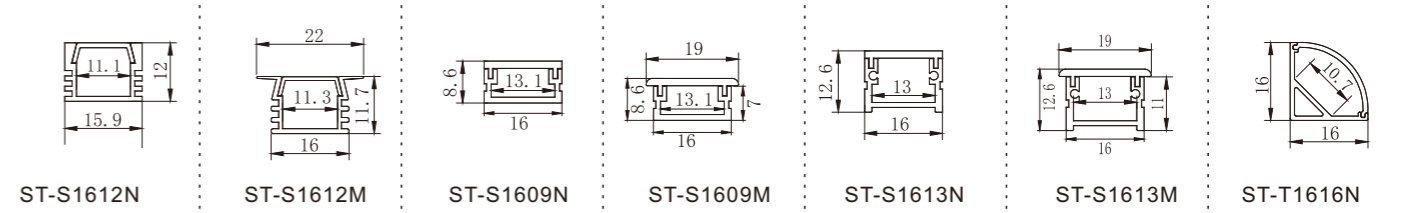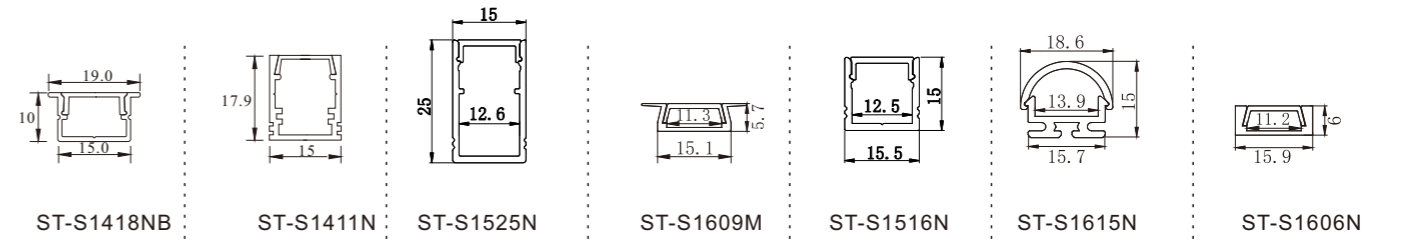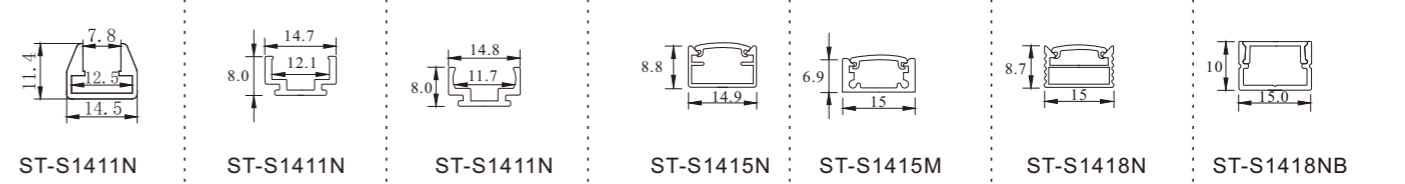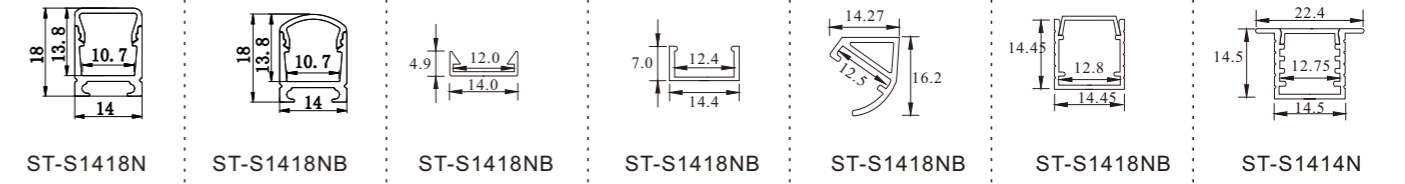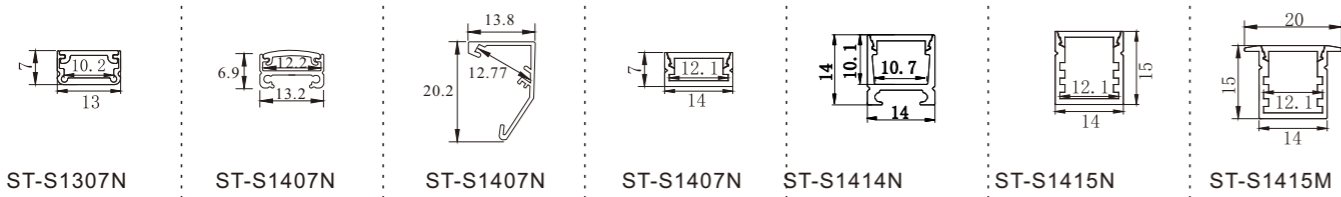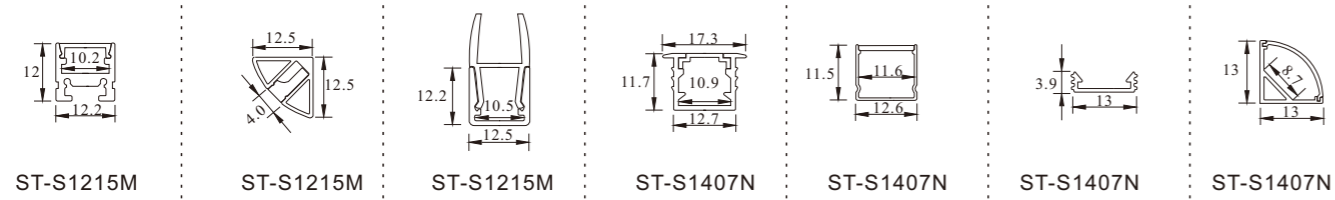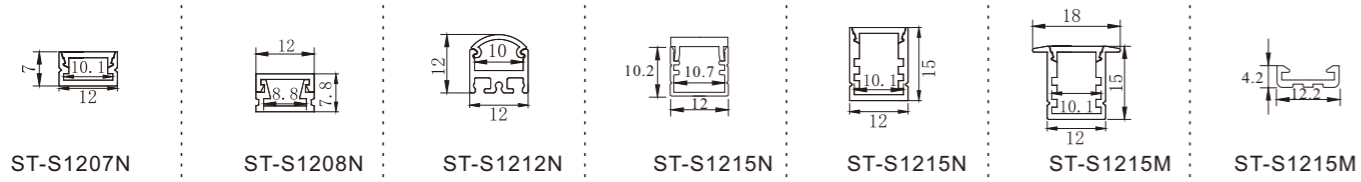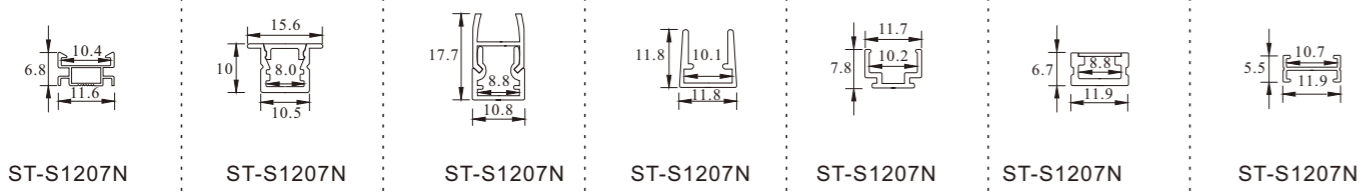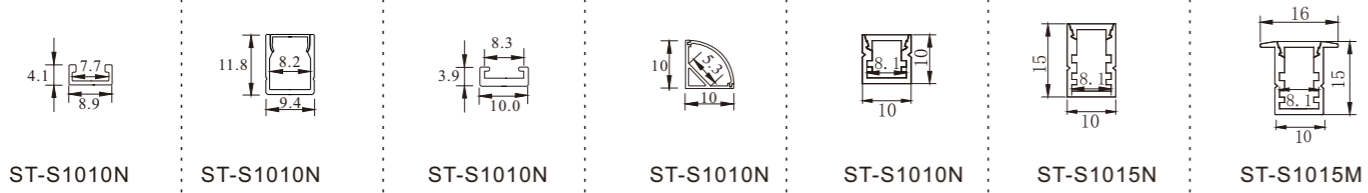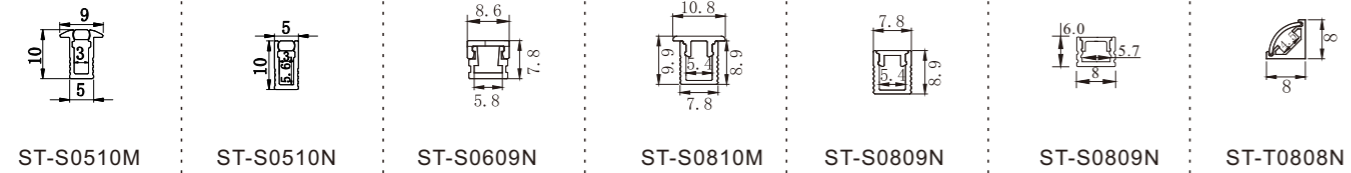


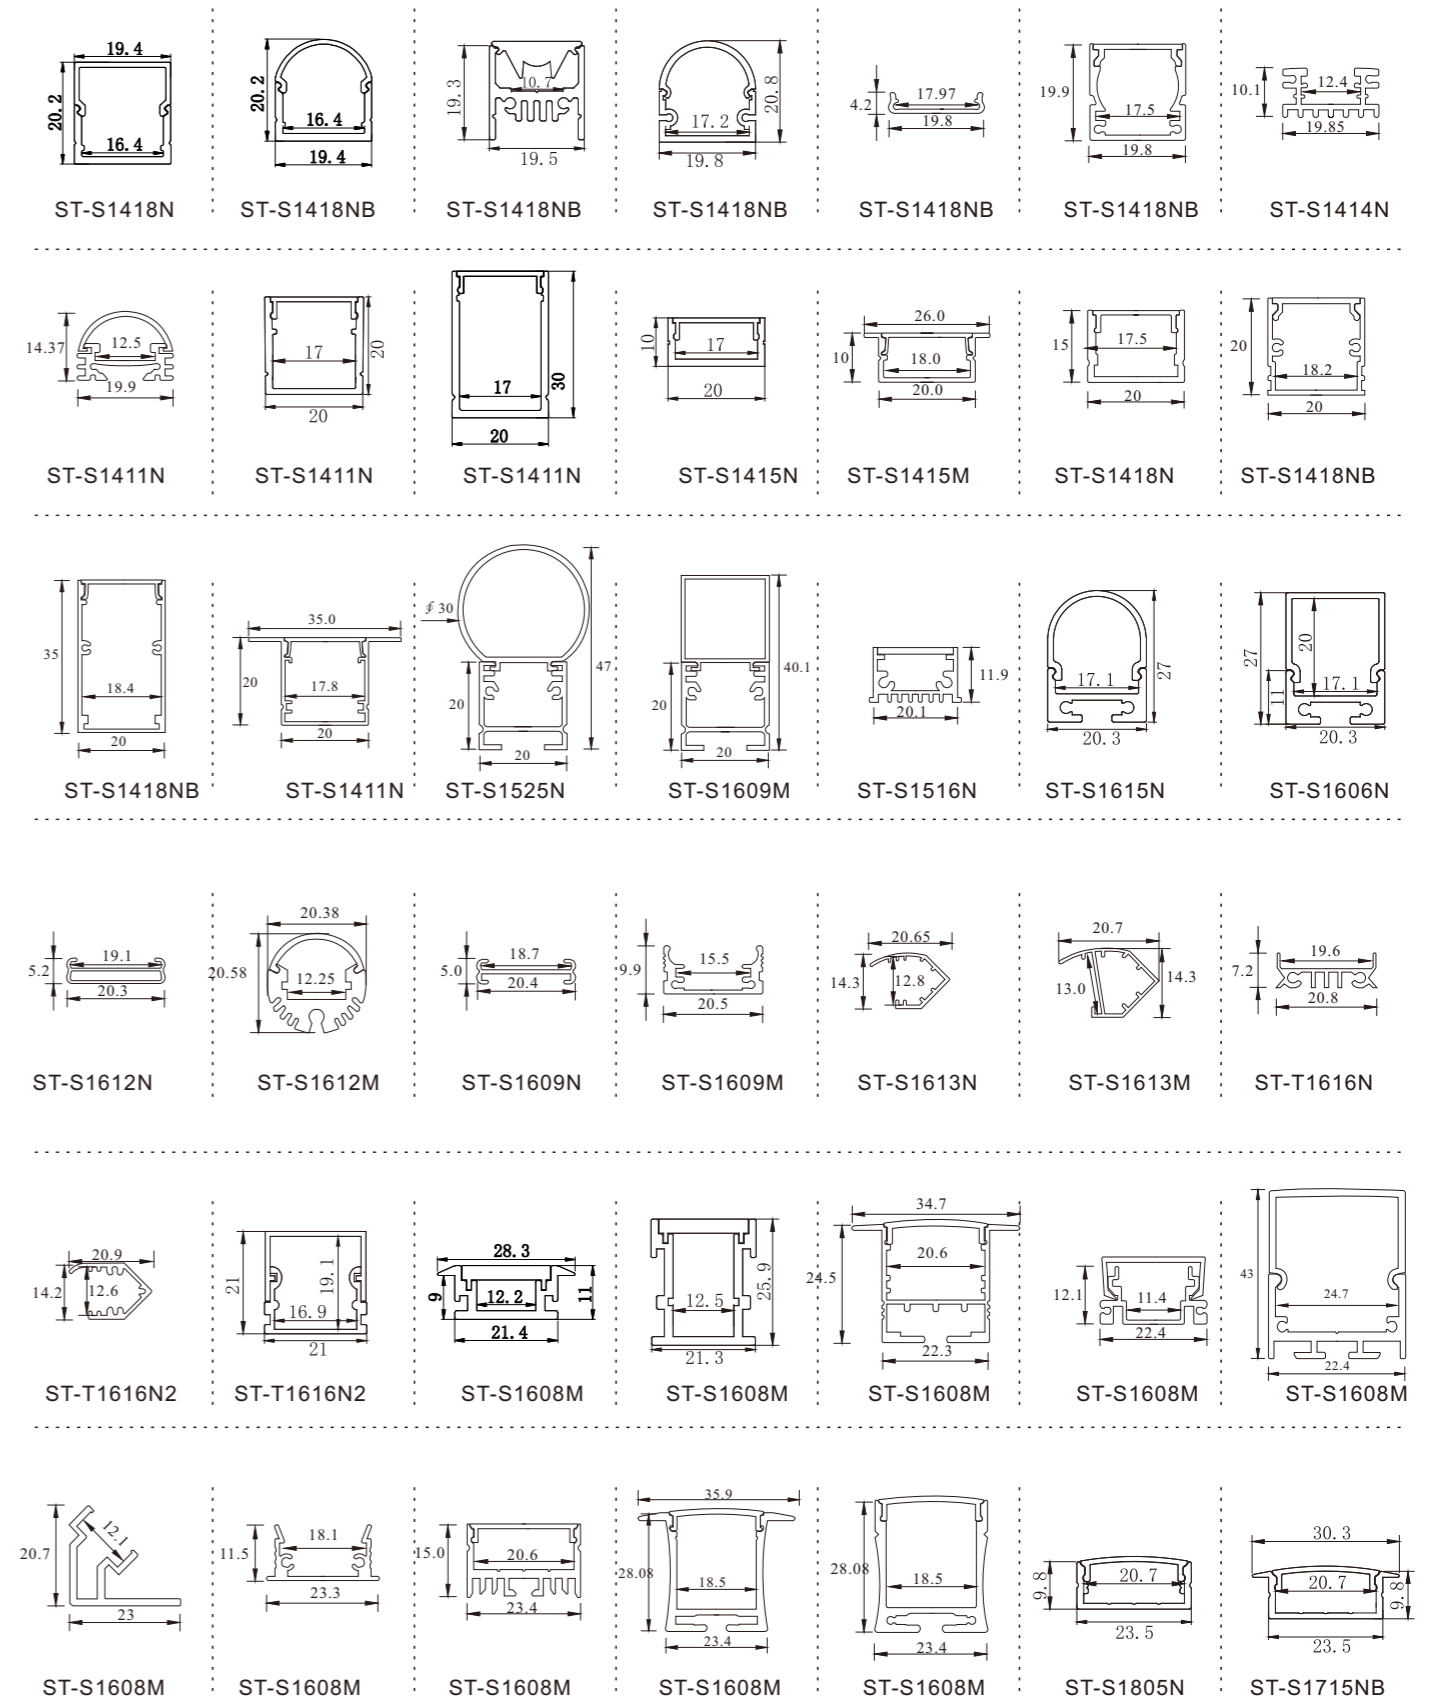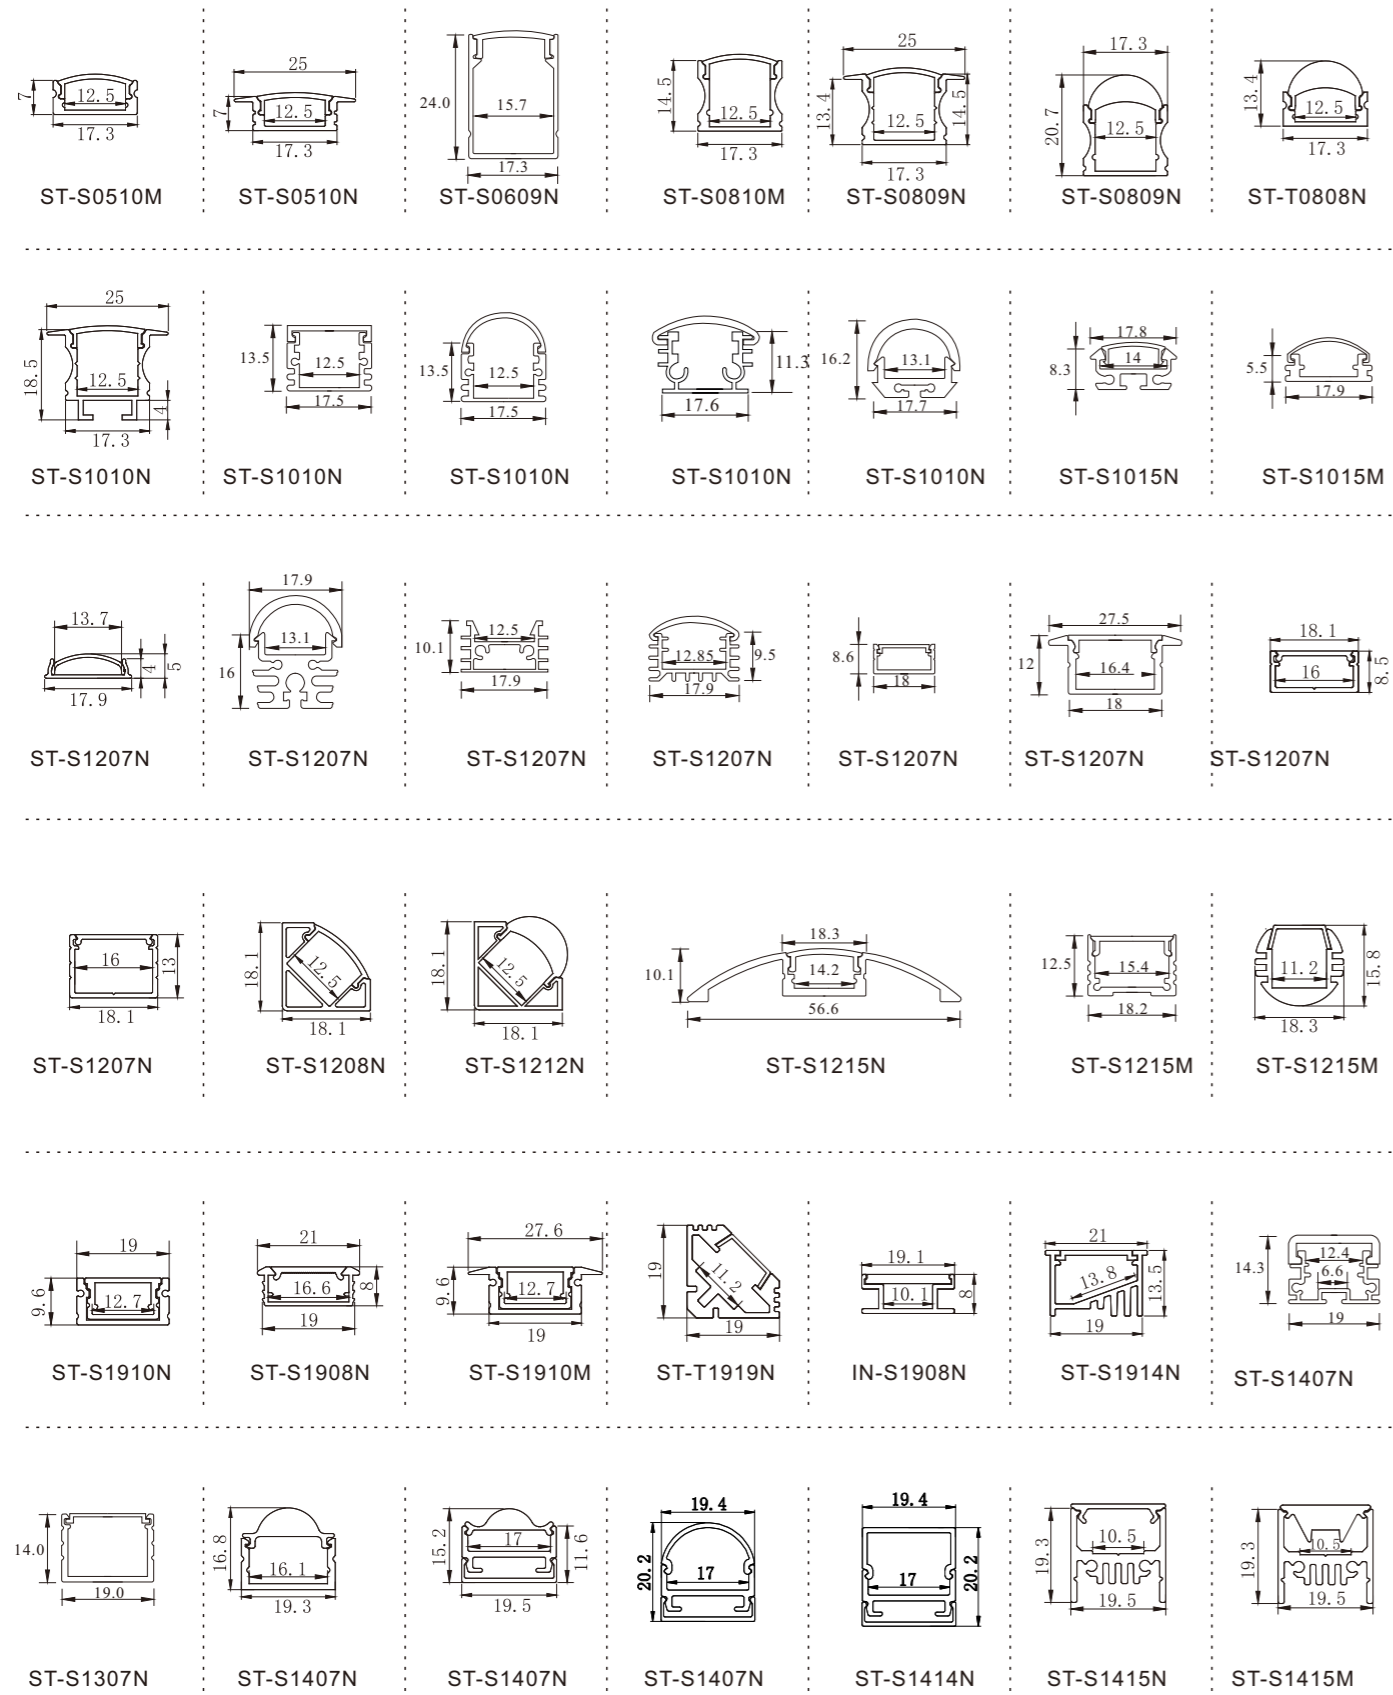

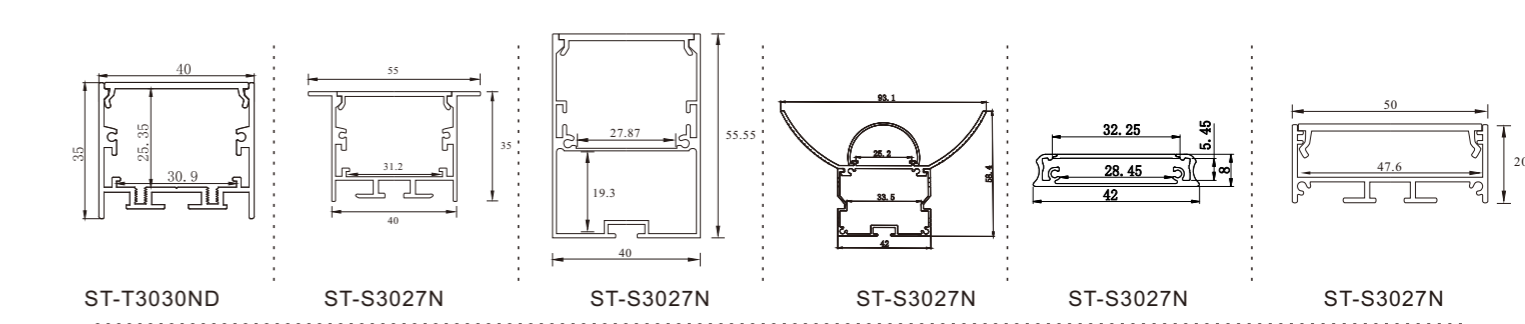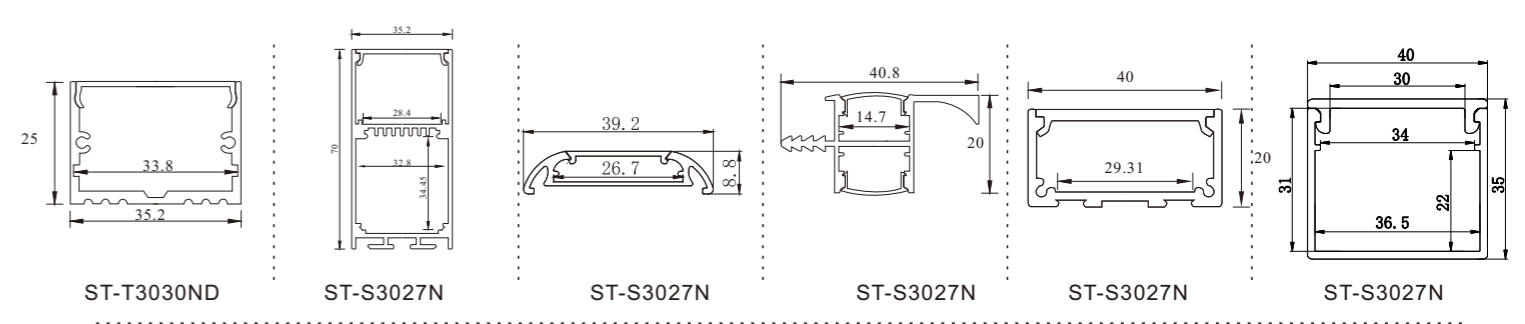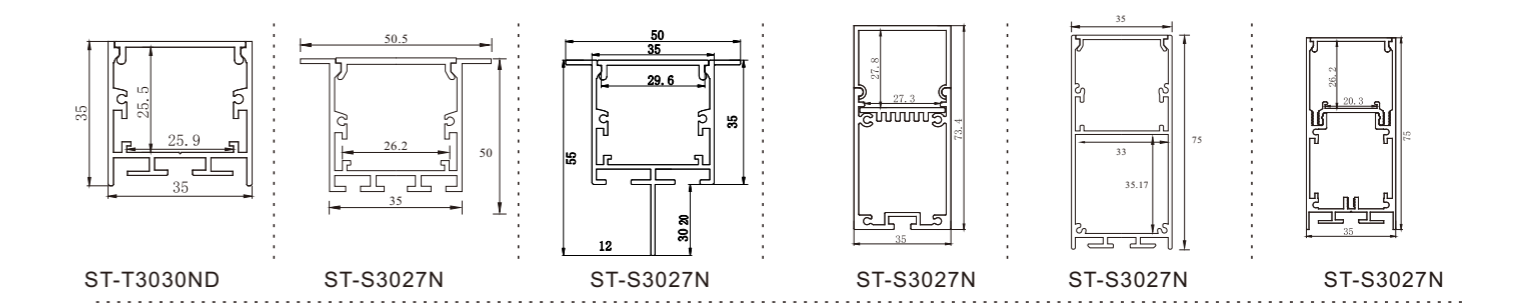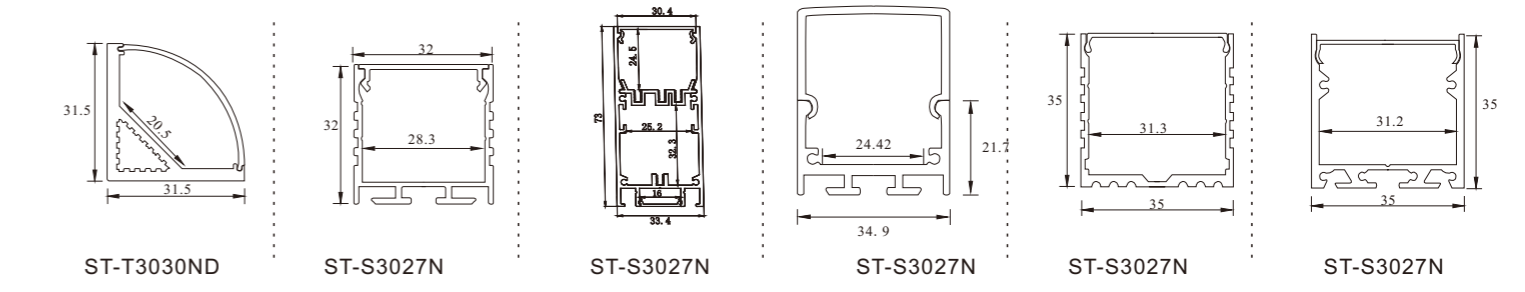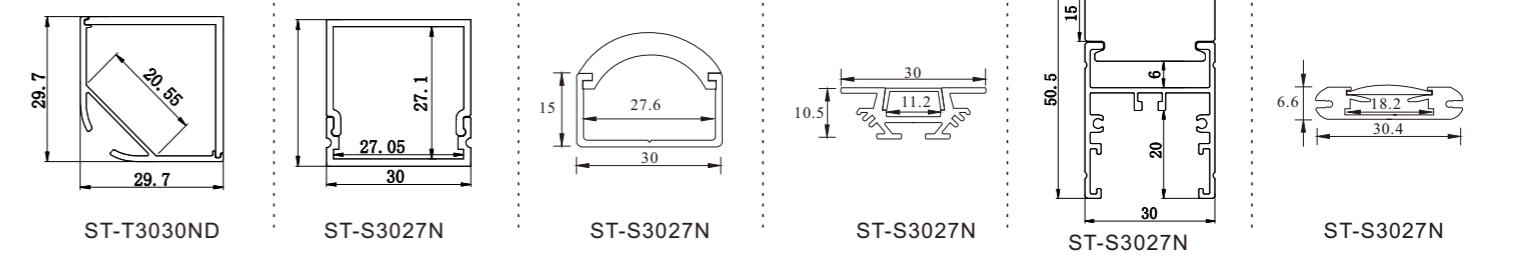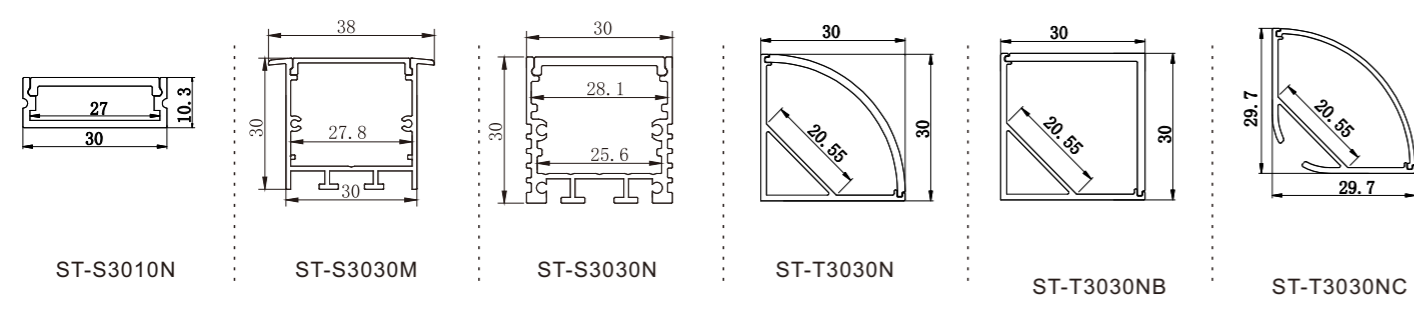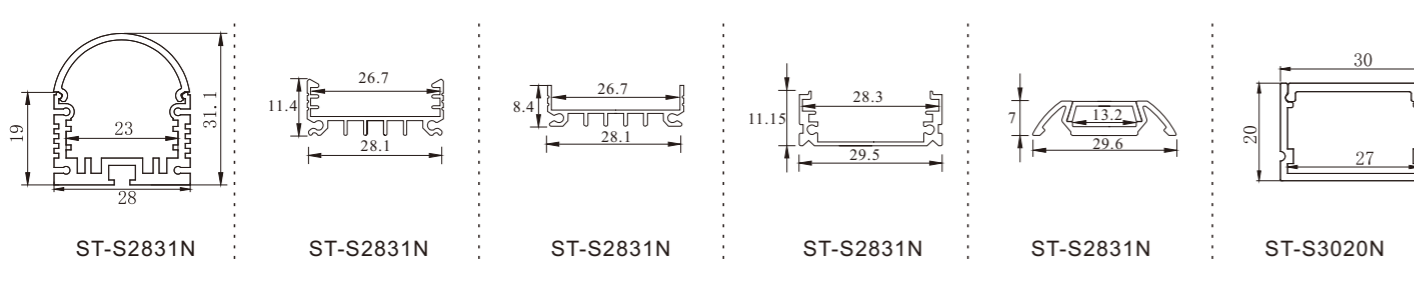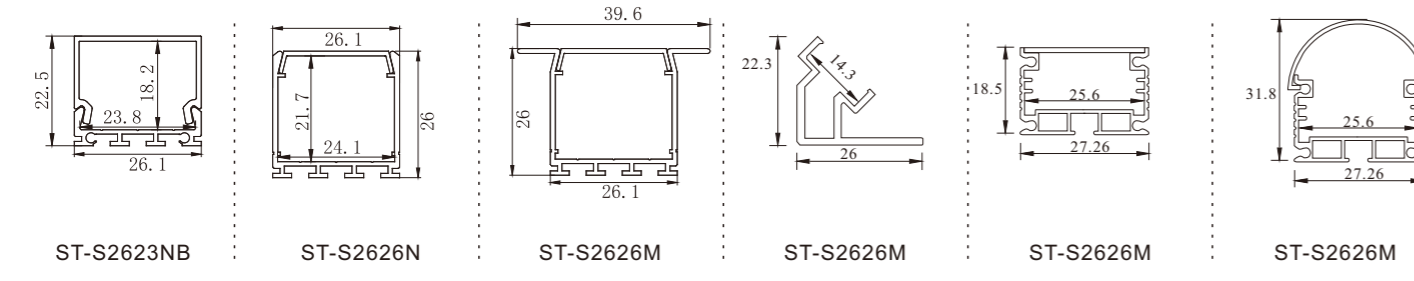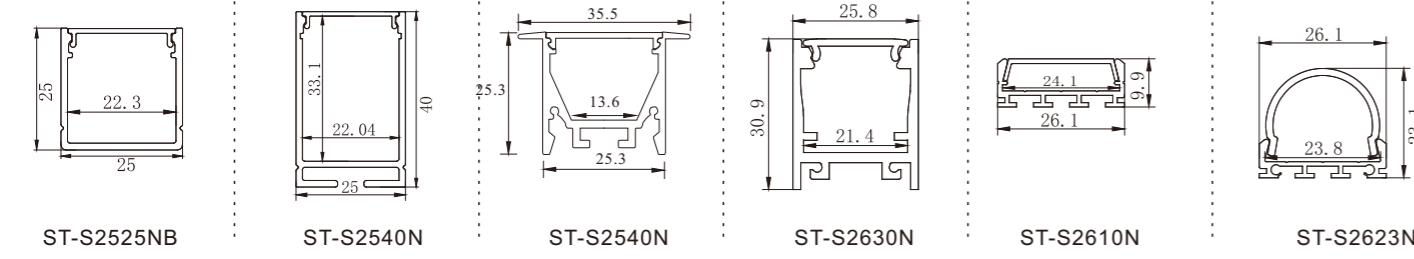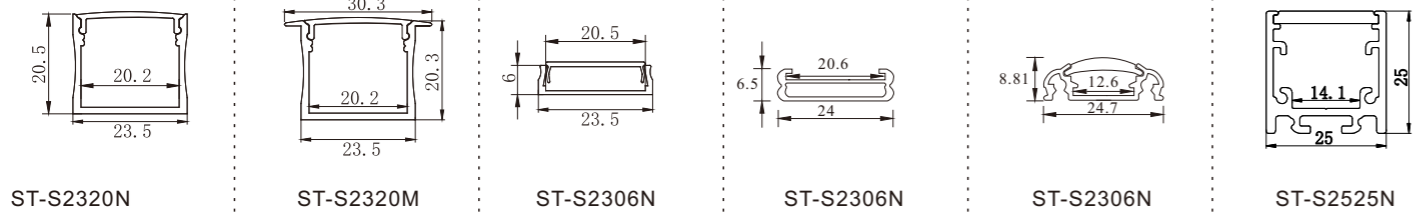





ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N



ST-S2320N




ST-S2320N




ST-S2320N







CR-S2320N




ST-S2320N




ST-S2320N




ST-S2320N

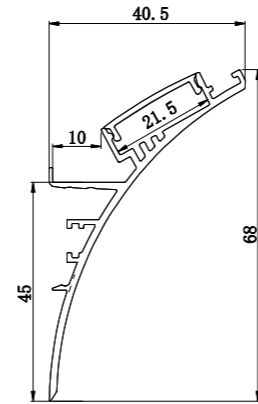


ST-S2320N

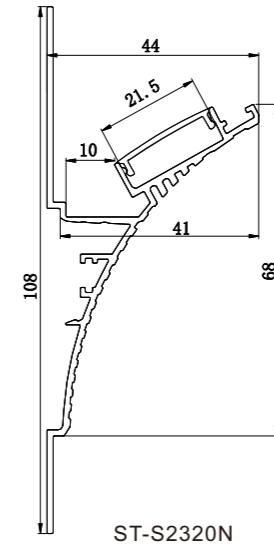


ST-S2320N

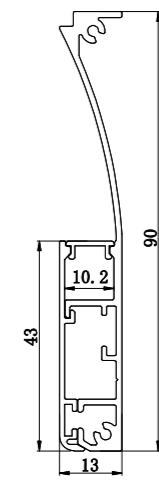


ST-S2320N

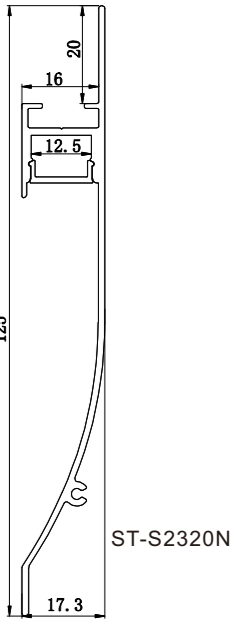


ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N




ST-S2320N

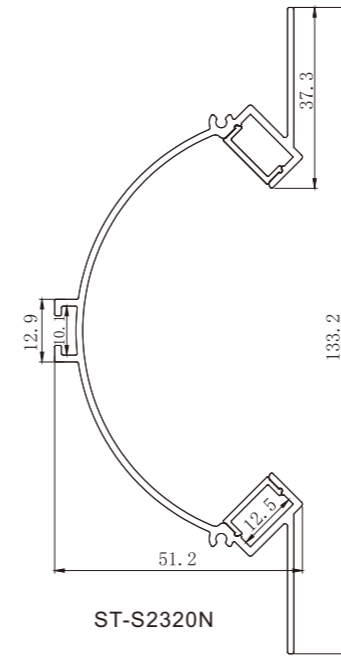


ST-S2320N

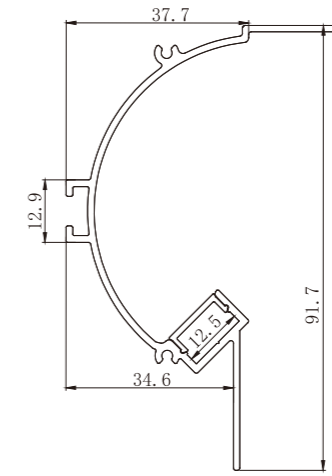


ST-S2320N

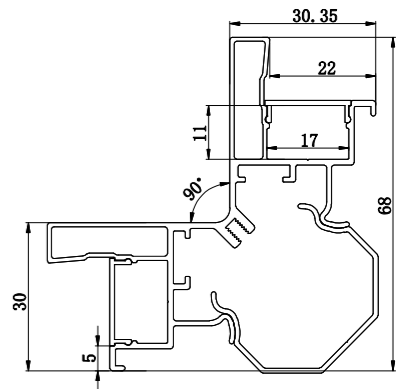


ST-S2320N




ST-S2320N

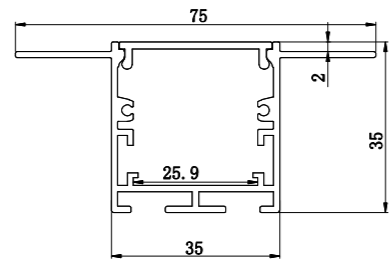


ST-S2320N

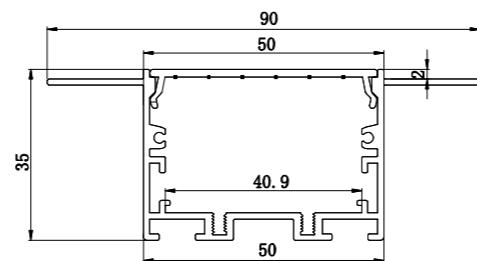


ST-S2320N

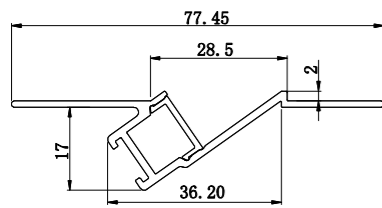


ST-S2320N

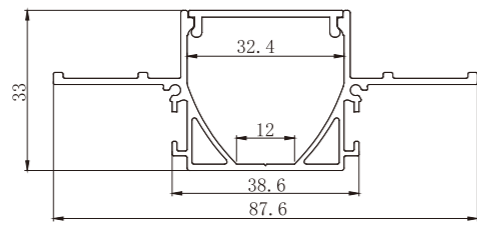

ST-S2320N

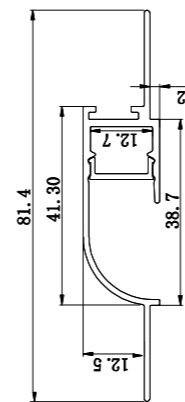

ST-S2320N

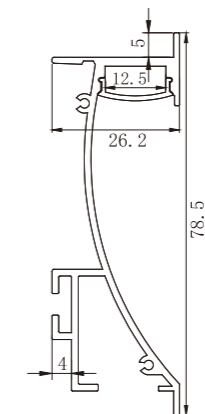

ST-S2320N

# STEP PROFILE

